

REVISION -
05/04/99 TS

REVISION A
REV'D MARKING
07/21/05 MP



REVISION B
ADDED RoHS
02/24/06 MP




MODEL NUMBER

PFT24-35

- A. Electrical Specifications (@ 25 °C)
 1. Input Voltage and Frequency; 115/230V 50/60 Hz
 2. Output Voltage; 35VCT ±5% @ 0.3A
16VCT ±5% @ 0.72A
 3. Output Power; 24VA
 4. Insulation Resistance; 100 MΩ MIN @ 500VDC, Pri to Sec, Pri to Core, Sec to Core
 5. Hi-Pot; 1500 Vrms 1 minute @ Pri to Sec, Pri to Core
1500 Vrms 1 minute @ Sec to Core
- B. Marking; TAMURA, MICROTRAN, PFT24-35, date code, country of origin, terminal numbers, safety symbols.
- C. Safety: UL506 General Purpose, File No. E79781
- D. Schematic Diagram:

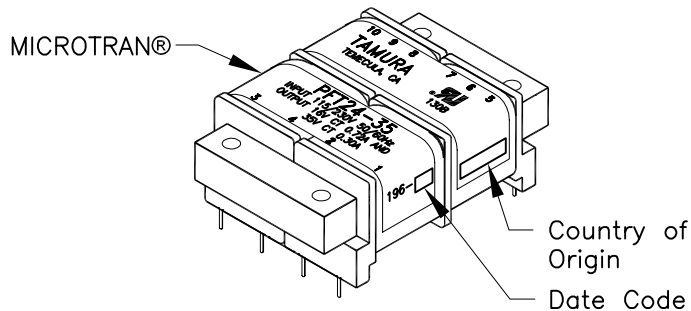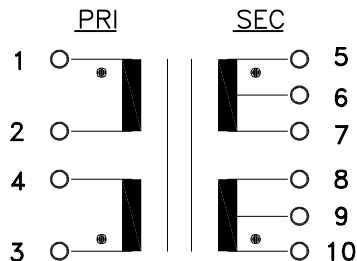

E. Mechanical Specifications:

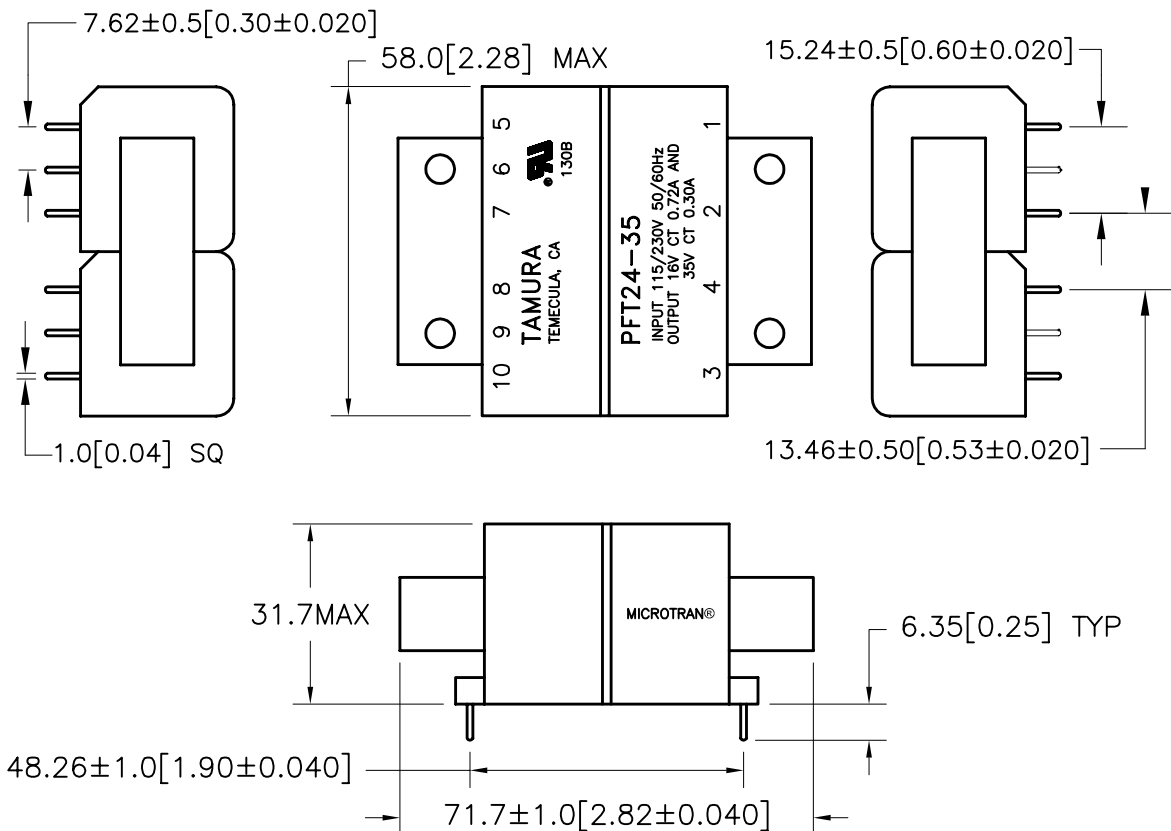

PREPARED BY:
K. BRENNAN

ENGINEER: M. PITCHAI
ACAD\MXFMR\A1121641.DWG

MODEL DESCRIPTION
3 FLANGE BOBBIN
POWER TRANSFORMER

MODEL SPECIFICATION
PFT24-35

QUALITY CONTROL: T. CLEM

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

DIM: mm[In] SCL: 1/1 SH: 1 OF 1

APPROVED: Y. SEKIGUCHI
PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.