(SMALL-SIGNAL TRANSISTOR)

2SA1369

FOR SMALL TYPE MOTOR, PLUNGER DRIVE APPLICATION SILICON PNP EPITAXIAL TYPE

DESCRIPTION

2SA1369 is a silicon PNP epitaxial type transistor designed with high collector dissipation, high collector current, high hFE.

Complementary with 2SC3439.

FEATURE

High hre hre=400 to 800

●High collector current (ICM=-3A, IC=-1.5A)


Small VCEO(sat) VCEO(sat)=-0.25V typ(@IC=-1A, IB=-20mA)


High collector dissipation Pc=500mW

Small package for mounting

APPLICATION

Small type motor drive for VCR, tape desk, player, drive for relay.

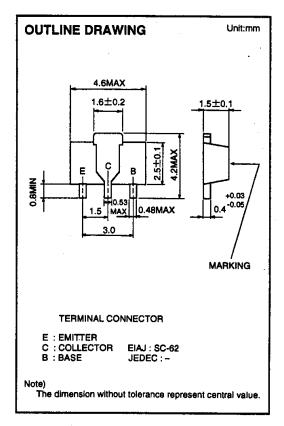

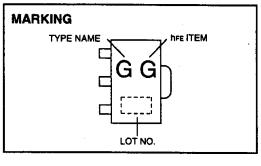

MAXIMUM RATINGS (Ta=25°C)

Symbol	Parameter	Ratings	Unit	
Vсво	Collector to Base voltage	-30	V	
VEBO	Emitter to Base voltage	-6	V	
VCEO	Collector to Emitter voltage	-20	V	
Ісм	Peak Collector current	-3	A	
lc	Collector current	-1.5	A	
Pc	Collector dissipation(Ta=25°C)	500	mW	
Tj	Junction temperature	+150	°.	
Tstg	Storage temperature	-55 to +150	C	

ELECTRICAL CHARACTERISTICS (Ta=25°C)


Symbol	Parameter	Test conditions	Limits				Unit
		Test conditions		Min	Тур	Max	
V(BR)CBO	C to B break down voltage	IC=-10 μ A,IE=0		-30			V
V(BR)EBO	E to B break down voltage	IE=-10 μ A,IC=0		-6			V
V(BR)CEO	C to E break down voltage	Ic=-1mA,RBE=∞		-20			V
Ісво	Collector cut off current	VCB=-20V,IE=0	· · · · · · · · · ·			-0.1	μA
IEBO	Emitter cut off current	VEB=-2V,IC=0				-0.1	μA
hfe *	DC forward current gain	Vce=-6V,Ic=-500mA	·····	400		1200	
VCE(sat)	C to E saturation voltage	IC=-1A,IB=-20mA			-0.25	-0.5	V
fr	Gain band width product	Vce=-10V,Ie=10mA			90		MHz
Cob	Collector output capacitance	VCB=-10V,IE=0, f=1MHz			37		pF
: It shows here classification in right table.			Mark	ding	GG	1	GH
			hF	Ē	400 to 800	600	to 1200

ISAHAYA ELECTRONICS CORPORATION

SMALL-SIGNAL TRANSISTOR

2SA1369


FOR SMALL TYPE MOTOR, PLUNGER DRIVE APPLICATION SILICON PNP EPITAXIAL TYPE

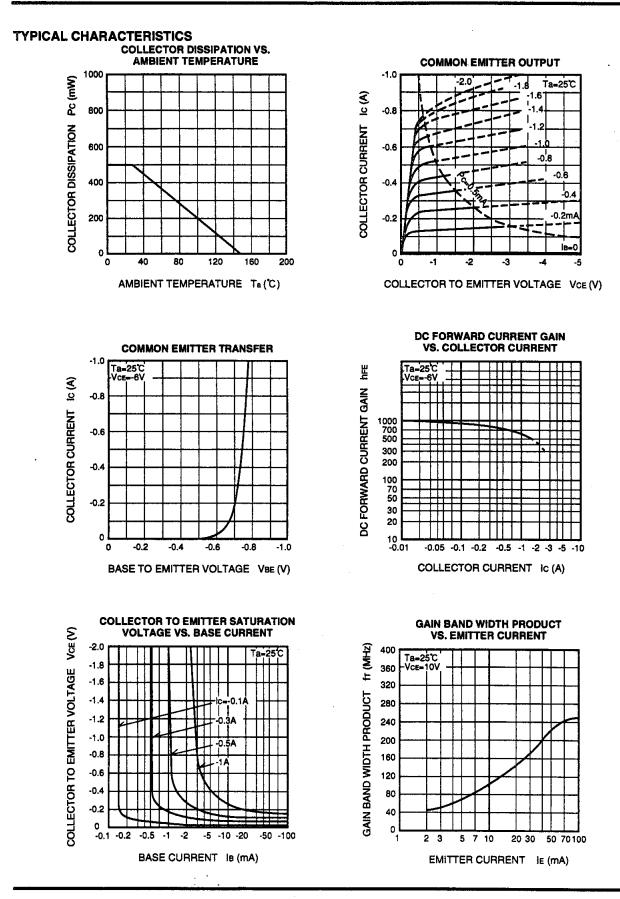

ISAHAYA ELECTRONICS CORPORATION

2SA1369

FOR SMALL TYPE MOTOR, PLUNGER DRIVE APPLICATION SILICON PNP EPITAXIAL TYPE

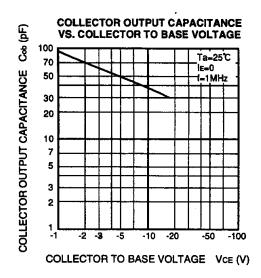

ISAHAYA ELECTRONICS CORPORATION
Downloaded from Elecodis.com electronic components distributor

ISAHAYA ELECTRONICS CORPORATION

http://www.idc-com.co.jp 6-41, TSUKUBA, ISAHAYA, NAGASAKI, 854-0065, JAPAN

Keep safety in your circuit designs !

Isahaya Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.Remember to give consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

•These materials are intended as reference to assist out customers in the selection of the Isahaya semiconductor product best suited to the customer's application, they do not convey any license under any intellectual property rights, or any other rights, belonging to Isahaya Electronics Corporation or a third party.

Isahaya Electronics Corporation assumes no responsibility for any damage, or infringement of any third-party rights, originating in the use of any product data, diagrams charts or circuit application examples contained in the materials.

All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by Isahaya Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Isahaya Electronics Corporation or authorized Isahaya Semiconductor product distributor for the latest product information before purchasing a product listed herein.

The prior written approval of Isahaya Electronics Corporation is necessary to reprint or reproduce in whole or in part these materials.

If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.

Please contact Isahaya Electronics Corporation or an authorized Isahaya Semiconductor product distributor for further details on these materials or the products contained therein.