

SANYO

No.4424

LA6512,6513

High-Voltage Dual Power Operational Amplifiers

Overview

LA6512 (SIP10F) and LA6513 (SIP10) are power operational amplifier ICs capable of withstanding high voltages of ± 30 V/1 A and are best suited for such voltage division devices as LCD drivers and general-purpose power operational amplifiers.


Features

- High output current (I_O max = 1.0A)
- High gain
- Equipped with current limiter pin (Adjustable by external settings)
- Supports single power source operation
- Withstands high voltages (± 30 V)

Package Dimensions


unit : mm

3046B-SIP10F

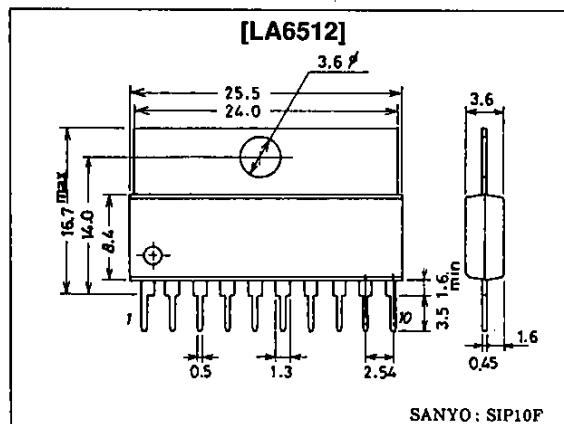

SANYO : SIP10F

3043A-SIP10

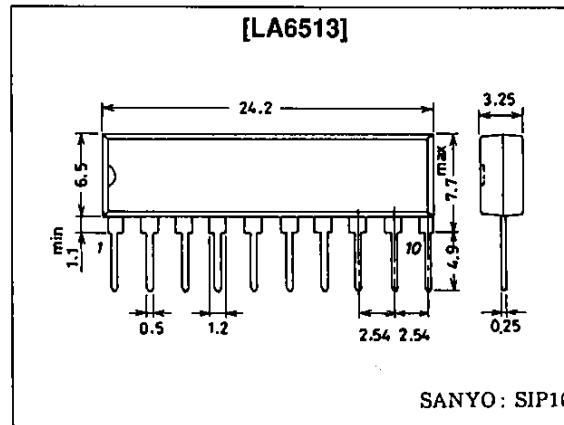

SANYO : SIP10

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$


			unit
Maximum supply voltage	V_{CC}/V_{EE} max	± 30	V
Differential input voltage	V_{IDIF}	56	V
Common mode input voltage	V_{ICOM}	± 28	V
Maximum output current	I_O max	1.0	A
Allowable power dissipation	Pd max	2.5	W
	LA6512	1.3	W
Operating temperature	T_{OPR}	-20 to +75	$^\circ\text{C}$
Storage temperature	T_{STG}	-55 to +150	$^\circ\text{C}$

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

41893TS A8-9798.9799 No.4424-1/4

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC}/V_{EE} = \pm 15$

		min	typ	max	unit
No-load dissipation current	I_{CC0}	6	12	20	mA
Input offset voltage	V_{IO}	$R_s \leq 10\text{k}\Omega$	2	6	mV
Input offset current	I_{IO}		10	200	nA
Input bias current	I_B		100	700	nA
Common mode input voltage range	V_{ICM}	-14		13	V
Common mode signal rejection ratio	C_{RM}	70	80		dB
Maximum output voltage	$V_O \text{ max}$	± 12	± 13		V
Voltage gain	V_{GO}		100		dB
Slew rate	SR	$G_V = 0, R_L = 33\Omega, R = 2.2\Omega, C = 0.1\mu\text{F}$	0.15		$\text{V}/\mu\text{s}$
Supply voltage rejection ratio	$SVRR$		30	150	$\mu\text{V}/\text{V}$
Limiting current	I_{SC}	$R_{SC} = 2.2\Omega$	0.35		A



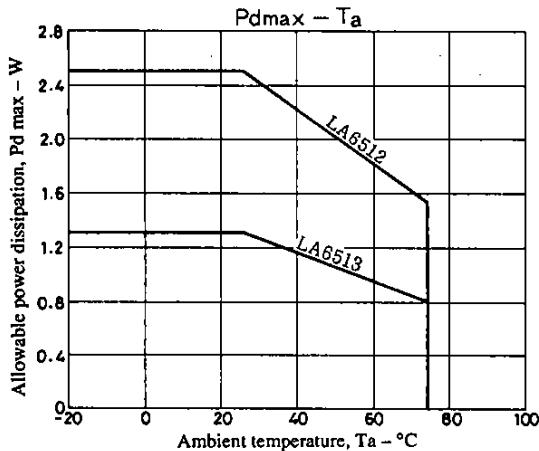


Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production.

SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Pin Assignment


(LA6512, 6513 common)

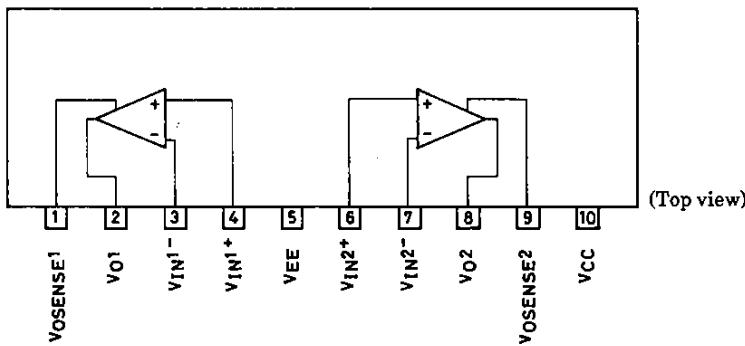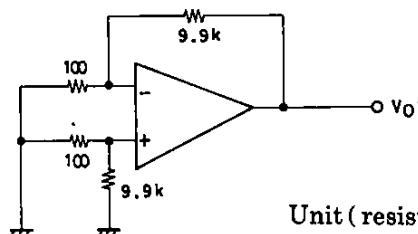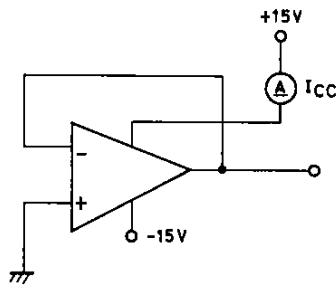**Test Circuit** I_{CC} V_{IO} , SVRRUnit (resistance: Ω)


- V_{IO} is with $V_{CC}/V_{EE} = \pm 15 \text{ V}$
- $SVRR$ is with $\begin{bmatrix} V_{CC} = 15.5 \text{ V} \\ V_{EE} = -5, -15 \text{ V} \end{bmatrix}$
- $V_{IO} = V_{O1}/100$
- $SVR (+) = \left| \frac{\Delta V_{O1}}{100 \times 10 \text{ V}} \right|$
- $SVR (-) = \left| \frac{\Delta V_{O1}}{100 \times 10 \text{ V}} \right|$

Continued on next page.



Continued from preceding page.

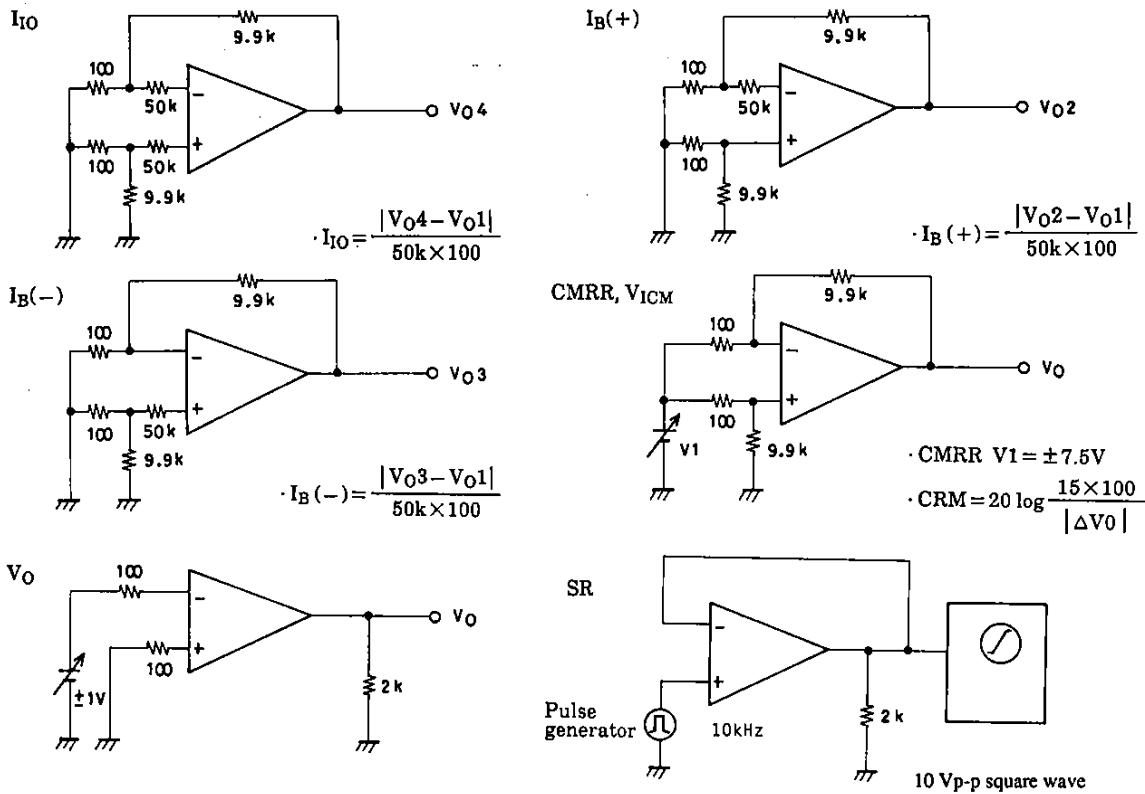

Application Circuit Example

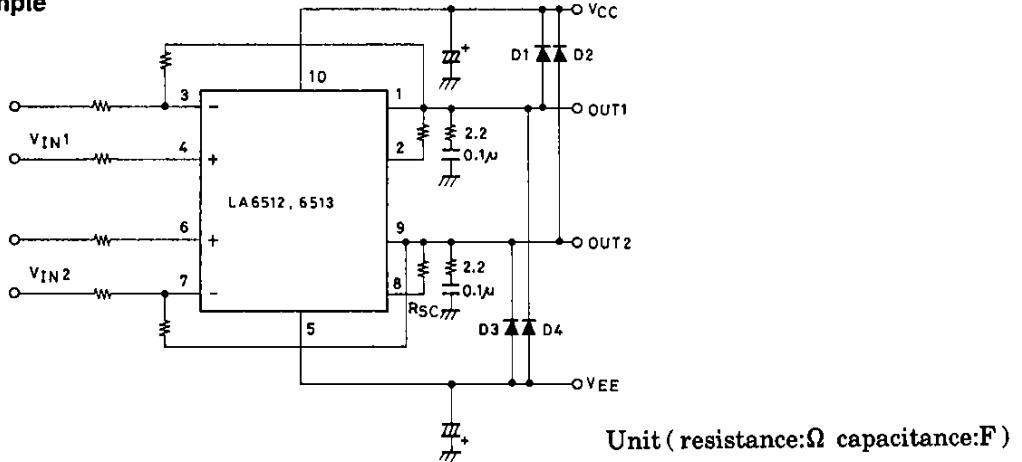

Note: When driving an inductive load, a D1 to D4 protective diode should be installed.

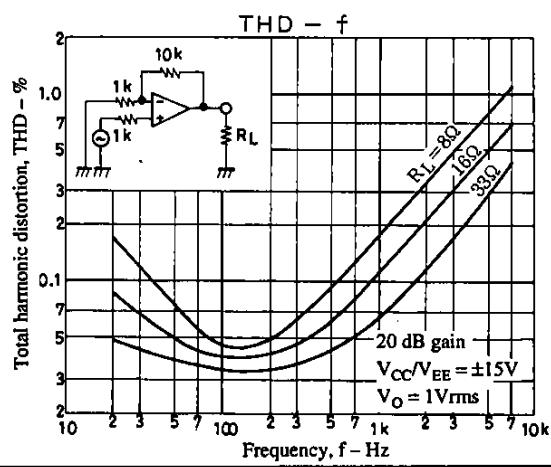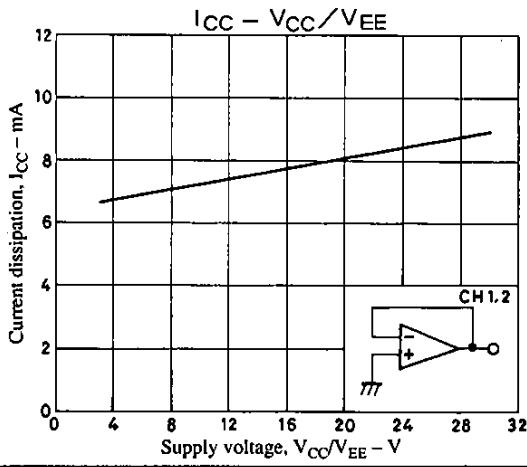

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.