
T1/E1/PRI-ISDN/CEPT Magnetic Module, Multi Port, 40 pin SMD

- Surface Mount Device withstands IR reflow profile process
- Operating temperature: -40°C to +85°C



Electrical Specification from 0°C to +70°C								
DCR (ΩMax)	Crosstalk (dB Min)	OCL (mH Min)	Hipot (Vrms)	Leakage Inductance (µH Max)	Cww (pF Max)	OCL (mH Min)		
Primary	0.1-10 MHz	Primary 100KHz 0.1Vrms	60 sec	100KHz 0.1Vrms	100KHz 0.1Vrms	Primary 100KHz 0.1Vrms		
0.8	-35	1.2	1500	0.5	35	0.6		

Secondary

Primary

		,		000011441)		
1	0		1CT:2		0	40
2	0	0.5	<u> </u> {	2	0	39
3	0	0.5	 1:2CT [-	38
4	0		— II 🔄	1	-	37
5	0	1	<u>} `</u>	1	-	36
6	0		1CT:2		-	35
7	0	0.5	<u>.</u> {	2	~	34
8	0	0.5	1.007		-	33
9	0		1:2CT ─ E —	1	-	32
10	O	1	<u>} `</u>	1	O	31
11	0		1CT:2		-0	30
12	<u></u>	0.5	▗▋║▐Ĺ	2	~	29
13	<u></u>	0.5	」¨ ∟		$\overline{\bigcirc}$	28
14	<u></u>		1:2CT 	1	$\overline{\bigcirc}$	27
15	<u></u>	1	<u> </u>	1	~	26
16	<u></u>		1CT:2		$\overline{\bigcirc}$	25
17	<u></u>	0.5	▗▋║▐Ĺ	2	~	24
18	<u></u>	0.5	」¨ ∟		~	23
19	<u></u>		1:2CT 	1	$\overline{\bigcirc}$	22
20	<u></u>	1	_} [_	1	O	21
	-				-	


PREPARED BY:

D. Rund **ENGINEER:** DWG CONTROL NO. T1/E1/PRI-ISDN/CEPT MAGNETIC MODULE P-A1-12874 TTC-6021 MULTI PORT, 40 PIN SMD ACAD\TTC\A1128741.DWG L. Le QUALITY CONTROL: CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 PRIOR NOTICE MODEL SPECIFICATION DIM: MM[IN] SCL: NONE SH: 1 OF T. Clem APPROVED: PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.


J. Coleman





T1/E1/PRI-ISDN/CEPT Magnetic Module, Multi Port, 40 pin SMD






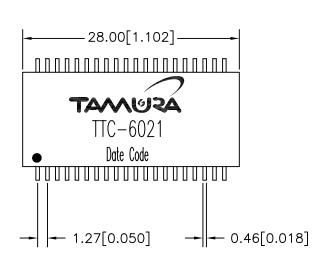

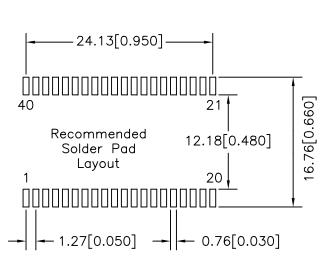

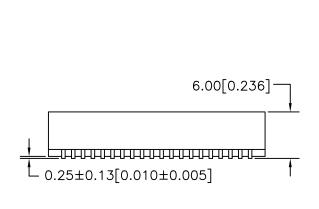

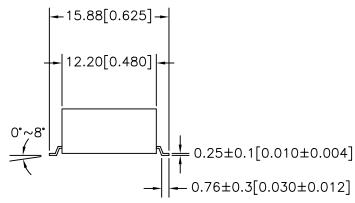

PREPARED BY:

D. Rund

T. Clem APPROVED: NOTE: Unless otherwise specified, all dimensions are mm[in] with tolerance of ± 0.25 [0.010]

ENGINEER: DWG CONTROL NO. REV P-A1-12874 ACAD\TTC\A1128742.DWG L. Le QUALITY CONTROL:

T1/E1/PRI-ISDN/CEPT MAGNETIC MODULE MULTI PORT, 40 PIN SMD

TTC-6021 MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE DIM: MM[IN] SCL: NONE PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

J. Coleman