



# TDK SMD Transformers

## Photoflash Capacitor Charging Transformer


### LDT565630T-001

**Mechanical**

RoHS Compliant: Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used except for exempted applications.

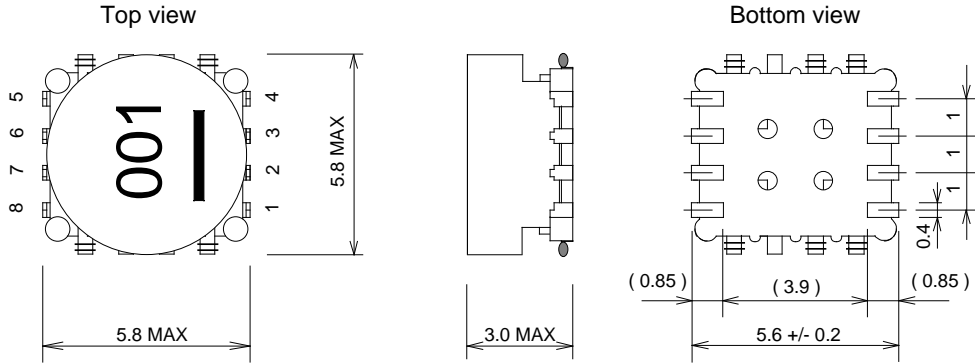

**Pad Layout**

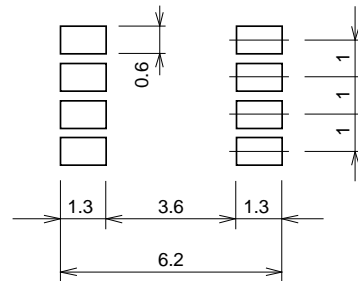

Mass : 0.25 g

Unit : mm.

Note : Non applicable application : Military, Medical.

**Electrical Specifications at 25degreesC**

1. Inductance 5,6 - 7,8 : 6.0uH +/-15% at 100kHz, 20mVrms
2. Leakage Inductance 5,6 - 7,8 ( short 1 - 4 ) : 200nH MAX. at 100kHz, 20mVrms
3. DC Resistance 5,6 - 7,8 : 100 mOhm MAX.  
1 - 4 : 7.10 Ohm MAX.
4. Capacitance 5,6 - 1 : 30pF MAX.
5. Withstanding Voltage Pri. - Sec. : 500Vrms
6. Operating Temperature -20 ~ 110 deg. ( included self temperature rise )

Maximum primary switching current : 1.5A at 100degreesC

waveform



**Schematics**

