

LM3361A Low Voltage/Power Narrow Band FM IF System


General Description

The LM3361A contains a complete narrow band FM demodulation system operable to less than 2V supply voltage. Blocks within the device include an oscillator, mixer, FM IF limiting amplifier, FM demodulator, op amp, scan control, and mute switch. The LM3361A is similar to the MC3361 with the following improvements: the LM3361A has higher voltage swing both at the op amp and audio outputs. It also has lower nominal drain current and a squelch circuit that draws significantly less current than the MC3361. Device pinout functions are identical with some slightly different operating characteristics.

Features

- Functions at low supply voltage (less than 2V)
- Highly sensitive (-3 dB limiting at 2.0 μ V input typical)
- High audio output (increased 6 dB over MC3361)
- Low drain current (2.8 mA typ., V_{CC}=3.6V)
- Minimal drain current increase when squelched
- Low external parts count

Block Diagram and Test Circuit

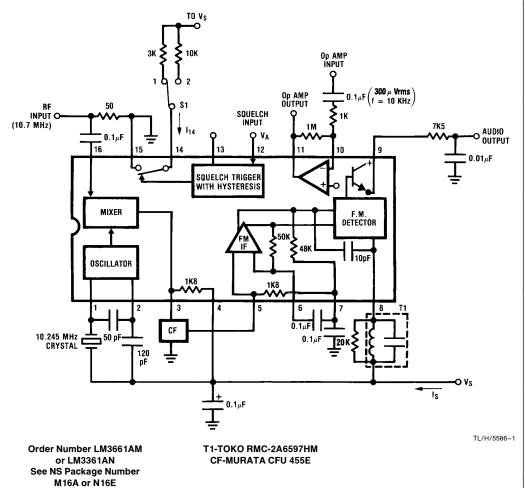

© 1995 National Semiconductor Corporation TL/H/5586

RRD-B30M115/Printed in U. S. A.

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

 Soldering Information
Dual-In-Line Package
Soldering (10 seconds) 260°C

Small Outline Package
Vapor Phase (60 seconds) 215°C
Infrared (15 seconds) 220°C

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.

Parameters Guaranteed By Electrical Testing

(Test ckt., T_A=25°C, V_S=3.6V, f_O=10.7 MHz, $\Delta f=\pm 3$ kHz, f_MOD=1 kHz, 50Ω source)

Parameter	Measure	Min	Тур	Max	Units
Supply Voltage Range	V _S	2.0	3.6	9.0	٧
Supply Current Squelch Off Squelch On	ls Is		2.8 3.6	5.0 6.0	mA mA
RF Input for -3 dB Limiting	RF Input		2.0	6.0	μV
Recovered Audio at Audio Output	Audio Output	200	350		mV _{RMS}
Audio Out DC	V ₉	1.2	1.5	1.8	V _{DC}
Op Amp Gain	V ₁₁ /V _{IN}	40	55		dB
Op Amp Output DC	V ₁₀	0.4	0.7		V _{DC}
Op Amp Input Bias Current	$(V_{10}-V_{11})/1M\Omega$		20	75	nA
Scan Voltage Pin 12 high (2V) Pin 12 Low (0V)	V ₁₃ V ₁₃	3.0	0 3.4	0.5	V _{DC}
Mute Switch Impedance, Pin 12 = 0V Switch S1 from pos.1 to pos.2	$\Delta V_{14}/\Delta I_{14}$		15	30	Ω

Design Parameters Not Tested or Guaranteed

	тур	
Mixer Conversion Gain (Note 2)	46	V/V
Mixer Input Resistance	3.6	$k\Omega$
Mixer Input Capacitance	2.2	pF
Detector Output Impedance	500	Ω
Squelch Hysterisis	100	mV
Mute Off Impedance (measure pin 14 with pin 12 @ 2V)	10	$M\Omega$
Squelch Threshold	0.65	V_{DC}
Detector Center Frequency Slope	0.15	V/kHz

Note 1. For operation above 25°C ambient temperature, the device must be derated based on 150°C maximum junction temperature and a thermal resistance θ_{JA} of 80°C/W.

Note 2. Mixer gain is supply dependent and effects overall sensitivity accordingly (See Typical Performance Characteristics).

 Coils:
 Filters:


 Toko America
 Murata


 1250 Feehanville Drive
 2200 Lake Park Drive


 Mount Prospect, IL 60056
 Smyrna, GA 30080


 (312) 297-0070
 (404) 436-1300

Typical Performance Characteristics (Test Circuits)











TL/H/5586-2

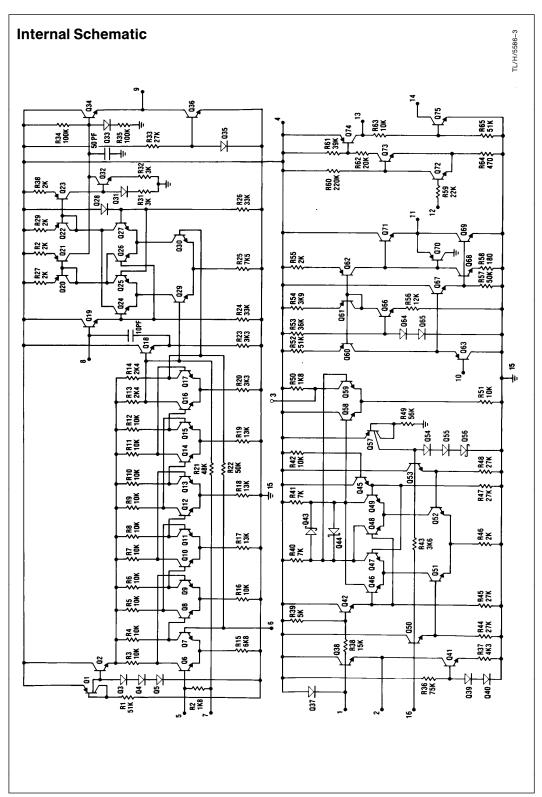

Applications Information (See Internal Schematic)

OSCILLATOR

The Colpitts type oscillator is internally biased with a regulated current source which assures proper operation over a wide supply range. The collector, base, and emitter terminals are at pins 4, 1, and 2 respectively. The crystal, which is used in the parallel resonant mode, may be replaced with an appropriate inductor if the application does not require the stability of a crystal oscillator. In this case, the resonant frequency will be determined by the inductor in parallel with the series combination of C1 and C2.



so Ct = (C1)(C2)/(C1 + C2) and $f_O = .159/\sqrt{L(Ct)}$

MIXER

The mixer is double balanced to reduce spurious responses. The upper pairs are switched by the oscillator while the RF input is applied to the lower pair (pin 16). R43 sets the mixer input impedance at 3.6 k Ω . The mixer output impedance of 1.8 k Ω will properly match the input impedance of a ceramic filter which is used as a bandpass filter coupling the mixer output to the IF limiting amplifier.

IF LIMITER

The IF amplifier consists of six differential gain stages, with the input impedance set by R2 at 1.8 k Ω to properly terminate the ceramic filter driving the IF. The IF alone (without mixer) has a -3 dB limiting sensitivity of approximately 50 μV . The system bandwidth is limited to about 5 MHz due to high impedances in the IF which are necessary to meet low power requirements. The IF output is connected to the external quad coil at pin 8 via an internal 10 pF capacitor.

FM DEMOD AUDIO OUT

A conventional quadrature detector is used to demodulate the FM signal. The Q of the quad coil, which is determined by the external resistor placed across it, has multiple effects on the audio output. Increasing the Q increases output level but because of nonlinearities in the tank phase characteris-

tic, also increases distortion (see Typical Performance Characteristics). For proper operation, the voltage swing on pin 8 should be adequate to drive the upper rank of the multiplier into switching (about 100 mVrms). This voltage level is dependent on the internal 10 pF capacitor and the tank $\rm R_p$ voltage divider network. After detection and de-emphasis, the audio output at pin 9 is buffered by an emitter follower.

OP AMP

The op amp inverting input (pin 10) which is internally referenced to 0.7V, receives dc bias from the output at pin 11 through the external feedback network. Because of the low D.C. bias, maximum swing on the op amp output with 10% distortion is 500 mVrms. This can be increased when operating on supplies over 2.3V by adding a resistor from the op amp input to ground which raises the quiescent D.C. at the output allowing more swing (see figure below for selection of added resistor). The op amp is normally utilized as either a bandpass filter to extract a specific frequency from the audio output, such as a ring or dial tone, or as a high pass filter to detect noise due to no input at the mixer. The latter condition will generate a signal at the op amp output, which when applied to pin 12 can mute the external audio amp.

For max swing: $V_{OUT} = (V_S - V_{BE})/2$ (from internal circuit)

so
$$(V_S - V_{BE})/2 = 0.7 \left(1 + \frac{R2}{R3}\right)$$

therefore $\frac{R2}{R3} = \left(\frac{V_S - V_{BE}}{1.4}\right) - 1$


Increasing OP Amp Swing


TL/H/5586-5


SQUELCH TRIGGER CIRCUIT

The squelch trigger circuit is configured such that a low bias on the input (pin 12) will force pin 13 high (200 mV below supply), where it can support at least a 1 mA load, and pin 14 to be a low impedance, typically 15Ω to ground. Connecting pin 14 to a high impedance ground reference point in the audio path between pin 9 and the audio amp will mute the audio output. Pulling pin 12 above mute threshold (0.65V) will force pin 13 to an impedance of about 60 $k\Omega$ to ground and pin 14 will be an open circuit. There is 100 mV of hysterisis at pin 12 which effectively prevents jitter.


Physical Dimensions inches (millimeters)







Molded Small Outline Package (M) Order Number LM3361AM NS Package Number M16A

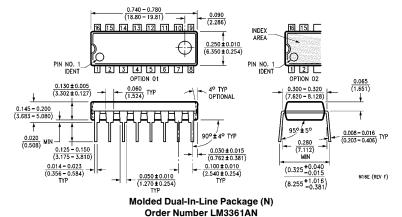

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

NS Package Number N16E

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor

National Semiconducto Corporation 1111 West Bardin Road Arlington, TX 76017 Tel: 1(800) 272-9959 Fax: 1(800) 737-7018

National Semiconductor Europe

Fax: (+49) 0-180-530 85 86 Fax: (+49) U-18U-35U oo oo Email: onjwege etevm2.nsc.com Deutsch Tel: (+49) 0-180-530 85 85 English Tei: (+49) 0-180-532 78 32 Français Tel: (+49) 0-180-532 93 58 Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.

Tsimshatsui, Kowloon Hong Kong Tel: (852) 2737-1600 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications