
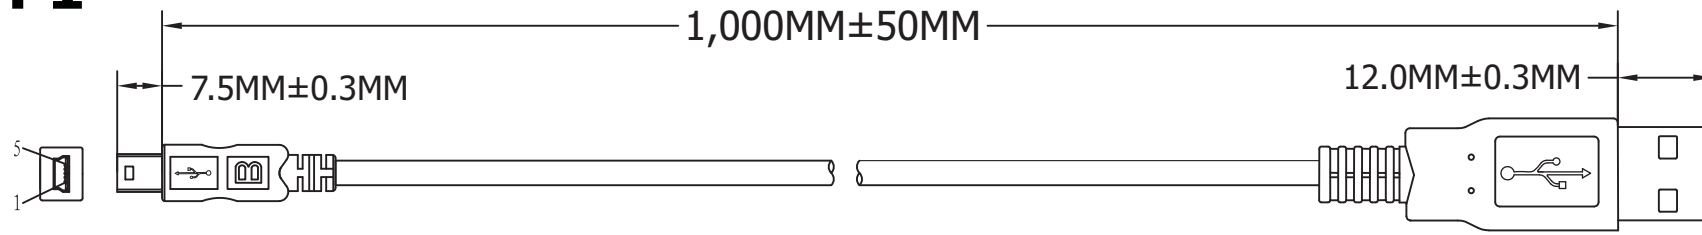



P1**P2**

PIN ASSIGNMENT			
P1			P2
1	RED		1
2	WHITE		2
3	GREEN		3
5	BLACK		4
SHELL		DRAIN + BRAID	SHELL

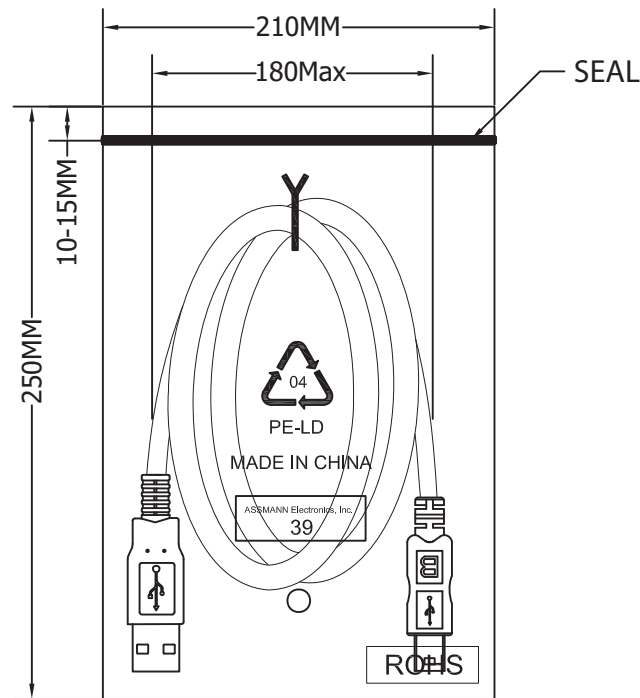

1PCS / PE BAG

Material:

- Cable: Black USB2.0 UL2725 28#/1P+28#/2C+AEB
 - OD: 3.8MM
- P1 Connector: USB Mini 5P Male
 - Pin: G/F
 - 3PCS Type
 - Insulator Color: Black
 - Shell: Nickel
 - Outer Jacket: Grey PVC-40P
- P2 Connector: USB A Male
 - Pin: G/F
 - 4PCS Type
 - Insulator Color: White
 - Shell: Nickel
 - Outer Jacket: Grey PVC-40P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 5Ω Max.
- Insulation resistance: 10MΩ Min.
- Dielectric Test: 300V DC

Ⓜ = Assmann logo

RoHS
Compliant

ITEM NO.

AK672M/2-1-GR-R

TITLE

USB 2.0 Mini Cable, Mini 5P Male <=> A Male,
30μ" Gold, Grey, 1.0 Meter
ASSMANN
Electronics, Inc.

 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
 Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

 THIS DRAWING IS UNPUBLISHED
 ©Copyright 2010 by Assmann Electronic Components
 All International Rights Reserved