

**Conductor:**


- Style/Size: UL2651 28AWG NPIN
- Material: TC
- Construction: 7/Φ0.125±0.008MM

**Jacket:**

- Min. Avg. Thick: 0.26MM
- Min. Thick.: 0.18MM
- Material: 35Pa UL-PVC (All the raw material meet VEGA GP standards)
- Color: NP(Brown, Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black...  
... Brown Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black)
- OD: 1.0MM±0.10MM\*50.0MM±0.15MM

**Electrical:**

- Conductor Resistance: Max. 237.25Ω/Km, 20°C
- Insulation Resistance: Min. 20MΩ/Km, 20°C
- Dielectric Strength: 1,500V AC 1min.
- UL File No. E189529
- UL Style: 2651-VW-1

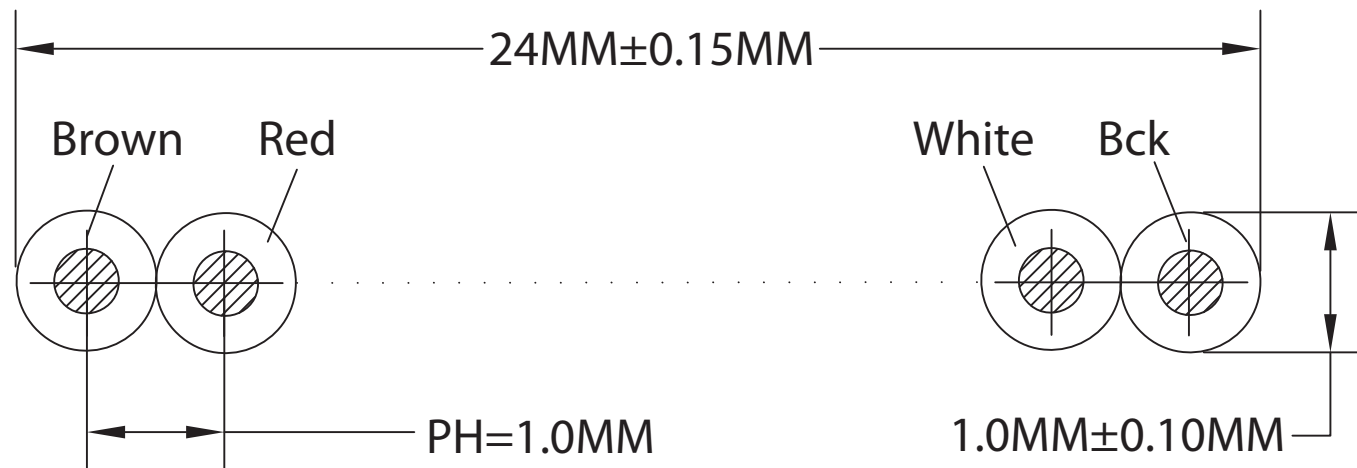

Unit: MM±0.15MM



ITEM NO.	<b>AWG28-24/F-1/300-R</b>
TITLE	Multi-Color Ribbon Cable - 28AWG, 1.0MM Pitch, 24 Conductors, 300 Feet, 13" Reel

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2011 by Assmann Electronic Components  
All International Rights Reserved