

Surface Mount Type

Series: FC Type : V


- Features
 - Endurance : 105°C 1000 h
 - Low impedance (1/2 for HA series)
 - 5.4 mm height ($\leq \phi 6.3$)
 - Vibration-proof product is available upon request. ($\phi 8 \leq$)
 - RoHS directive compliant(Parts No:EEE*)




■ Specifications

Category temp. range								-40 to +105°C
Rated W.V. Range								6.3 to 50 V .DC
Nominal Cap. Range								1 to 1500 μ F
Capacitance Tolerance								$\pm 20\%$ (120Hz/+20°C)
DC Leakage Current	I \leq 0.01 CV or 3(μ A) after 2 minutes							(Whichever is greater)
tan δ	W.V. (V)	6.3	10	16	25	35	50	(120Hz/+20°C) (max.)
	tan δ	0.26	0.19	0.16	0.14	0.12	0.12	
Characteristics at Low Temperature	W.V. (V)	6.3	10	16	25	35	50	(Impedance ratio at 120 Hz)
	-25 / +20 °C	2	2	2	2	2	2	
	-40 / +20 °C	3	3	3	3	3	3	
Endurance	After applying rated working voltage for 1000 hours at +105 \pm 2°C and then being stabilized at +20°C, capacitors shall meet the following limits.							
	Capacitance change	$\pm 20\%$ of initial measured value						
	tan δ	$\leq 200\%$ of initial specified value						
	DC leakage current	\leq initial specified value						
Shelf Life	After storage for 1000 hours at +105 \pm 2°C with no voltage applied and then being stabilized at +20°C, capacitors shall meet the limits specified in Endurance.(With voltage treatment)							
	After reflow soldering (Refer to page 86 for recommended temperature profile), and then being stabilized at +20°C, capacitor shall meet the following limits.							
Resistance to Soldering Heat	After reflow soldering (Refer to page 86 for recommended temperature profile), and then being stabilized at +20°C, capacitor shall meet the following limits.							
	Capacitance change	$\pm 10\%$ of initial measured value						
	tan δ	\leq initial specified value						
	DC leakage current	\leq initial specified value						

■ Marking

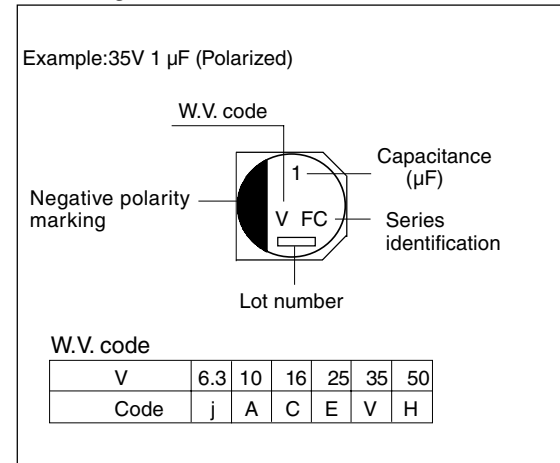

■ Dimensions in mm (not to scale)

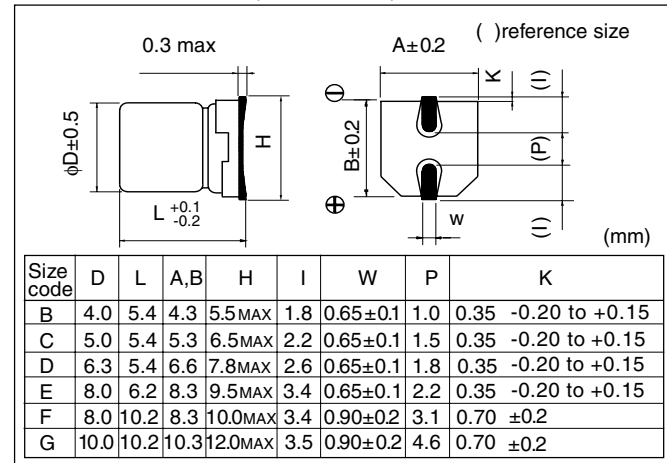

■ Case size

Cap. (μ F)	W.V.(V)	6.3 (0J)	10 (1A)	16 (1C)	25 (1E)	35 (1V)	50(1H)
1 to 3.3						B	B
4.7						B	C
6.8					B	C	
10				B		C	D
22	B		C		D	D	E
33			C		D	E	F
47	C			D	E	E	G
68	D			E	F		
100	D		E	E	F	G	G
150			E				
220	E	F		G	G	G	G
330	F			G	G	G	
470			G	G	G		
680				G			
1000	G	G					
1500	G						

■ Impedance (Ω) (100kHz/+20°C)

(6.3 to 35W.V)

Size Code	B	C	D	E	F	G
Impedance	3.0	1.8	1.0	0.4	0.3	0.15

(50W.V)

Size Code	B	C	D	E	F	G
Impedance	5.0	3.0	2.0	0.7	0.6	0.3

■ Standard Products

W.V. (V)	Cap. (±20%) (μF)	Case size			Specification		Part No. (RoHS: not compliant)		Part No. (RoHS: compliant)		Min. Packaging Q'ty
		Dia. (mm)	Length (mm)	Size Code	Ripple current (100kHz) (+105°C) (mA)	Impe- dance (100kHz) (+20°C) (Ω)		Reflow		Reflow	Taping (pcs)
6.3	22	4	5.4	B	60	3.00	EEVFC0J220R	(1)	EEEF0J220R	(4)	2000
	47	5	5.4	C	95	1.80	EEVFC0J470R	(1)	EEEF0J470R	(4)	1000
	68	6.3	5.4	D	140	1.00	EEVFC0J680P	(1)	EEEF0J680P	(4)	1000
	100	6.3	5.4	D	140	1.00	EEVFC0J101P	(1)	EEEF0J101P	(4)	1000
	220	8	6.2	E	230	0.40	EEVFC0J221P	(2)	EEEF0J221P	(5)	1000
	330	8	10.2	F	450	0.30	EEVFC0J331P	(2)	EEEF0J331P	(5)	500
	1000	10	10.2	G	670	0.15	EEVFC0J102P	(2)	EEEF0J102P	(5)	500
	1500	10	10.2	G	670	0.15	EEVFC0J152P	(2)	EEEF0J152P	(5)	500
10	33	5	5.4	C	95	1.80	EEVFC1A330R	(1)	EEEF1A330R	(4)	1000
	100	8	6.2	E	230	0.40	EEVFC1A101P	(2)	EEEF1A101P	(5)	1000
	150	8	6.2	E	230	0.40	EEVFC1A151P	(2)	EEEF1A151P	(5)	1000
	220	8	10.2	F	450	0.30	EEVFC1A221P	(2)	EEEF1A221P	(5)	500
	470	10	10.2	G	670	0.15	EEVFC1A471P	(2)	EEEF1A471P	(5)	500
	1000	10	10.2	G	670	0.15	EEVFC1A102P	(2)	EEEF1A102P	(5)	500
16	10	4	5.4	B	60	3.00	EEVFC1C100R	(1)	EEEF1C100R	(4)	2000
	22	5	5.4	C	95	1.80	EEVFC1C220R	(1)	EEEF1C220R	(4)	1000
	47	6.3	5.4	D	140	1.00	EEVFC1C470P	(1)	EEEF1C470P	(4)	1000
	68	8	6.2	E	230	0.40	EEVFC1C680P	(2)	EEEF1C680P	(5)	1000
	100	8	6.2	E	230	0.40	EEVFC1C101P	(2)	EEEF1C101P	(5)	1000
	220	10	10.2	G	670	0.15	EEVFC1C221P	(2)	EEEF1C221P	(5)	500
	330	10	10.2	G	670	0.15	EEVFC1C331P	(2)	EEEF1C331P	(5)	500
	470	10	10.2	G	670	0.15	EEVFC1C471P	(2)	EEEF1C471P	(5)	500
25	6.8	4	5.4	B	60	3.00	EEVFC1E6R8R	(1)	EEEF1E6R8R	(4)	2000
	22	6.3	5.4	D	140	1.00	EEVFC1E220P	(1)	EEEF1E220P	(4)	1000
	33	6.3	5.4	D	140	1.00	EEVFC1E330P	(1)	EEEF1E330P	(4)	1000
	47	8	6.2	E	230	0.40	EEVFC1E470P	(2)	EEEF1E470P	(5)	1000
	68	8	10.2	F	450	0.30	EEVFC1E680P	(2)	EEEF1E680P	(5)	500
	100	8	10.2	F	450	0.30	EEVFC1E101P	(2)	EEEF1E101P	(5)	500
	220	10	10.2	G	670	0.15	EEVFC1E221P	(2)	EEEF1E221P	(5)	500
	330	10	10.2	G	670	0.15	EEVFC1E331P	(2)	EEEF1E331P	(5)	500
35	470	10	10.2	G	670	0.15	EEVFC1E471P	(2)	EEEF1E471P	(5)	500
	1	4	5.4	B	60	3.00	EEVFC1V1R0R	(1)	EEEF1V1R0R	(4)	2000
	2.2	4	5.4	B	60	3.00	EEVFC1V2R2R	(1)	EEEF1V2R2R	(4)	2000
	3.3	4	5.4	B	60	3.00	EEVFC1V3R3R	(1)	EEEF1V3R3R	(4)	2000
	4.7	4	5.4	B	60	3.00	EEVFC1V4R7R	(1)	EEEF1V4R7R	(4)	2000
	6.8	5	5.4	C	95	1.80	EEVFC1V6R8R	(1)	EEEF1V6R8R	(4)	1000
	10	5	5.4	C	95	1.80	EEVFC1V100R	(1)	EEEF1V100R	(4)	1000
	22	6.3	5.4	D	140	1.00	EEVFC1V220P	(1)	EEEF1V220P	(4)	1000
	33	8	6.2	E	230	0.40	EEVFC1V330P	(2)	EEEF1V330P	(5)	1000
	47	8	6.2	E	230	0.40	EEVFC1V470P	(2)	EEEF1V470P	(5)	1000
100	10	10.2	G	670	0.15	EEVFC1V101P	(2)	EEEF1V101P	(5)	500	
220	10	10.2	G	670	0.15	EEVFC1V221P	(2)	EEEF1V221P	(5)	500	

An explanation of the taping dimensions can be found on page 84.

Reflow profiles can be found on page 86.

Endurance: 105°C 1000h

Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use.
Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.

■ Standard Products

W.V. (V)	Cap. (±20%) (μF)	Case size			Specification		Part No. (RoHS: not compliant)	Reflow	Part No. (RoHS: compliant)	Reflow	Min. Packaging Q'ty Taping (pcs)
		Dia. (mm)	Length (mm)	Size Code	Ripple current (100kHz) (+105°C) (mA)	Impe- dance (100kHz) (+20°C) (Ω)					
35	330	10	10.2	G	670	0.15	EEVFC1V331P	(2)	EEEFC1V331P	(5)	500
50	1	4	5.4	B	30	5.00	EEVFC1H1R0R	(1)	EEEFC1H1R0R	(4)	2000
	2.2	4	5.4	B	30	5.00	EEVFC1H2R2R	(1)	EEEFC1H2R2R	(4)	2000
	3.3	4	5.4	B	30	5.00	EEVFC1H3R3R	(1)	EEEFC1H3R3R	(4)	2000
	4.7	5	5.4	C	50	3.00	EEVFC1H4R7R	(1)	EEEFC1H4R7R	(4)	1000
	10	6.3	5.4	D	70	2.00	EEVFC1H100P	(1)	EEEFC1H100P	(4)	1000
	22	8	6.2	E	120	0.70	EEVFC1H220P	(2)	EEEFC1H220P	(5)	1000
	33	8	10.2	F	300	0.60	EEVFC1H330P	(2)	EEEFC1H330P	(5)	500
	47	10	10.2	G	500	0.30	EEVFC1H470P	(2)	EEEFC1H470P	(5)	500
	100	10	10.2	G	500	0.30	EEVFC1H101P	(2)	EEEFC1H101P	(5)	500
	220	10	10.2	G	500	0.30	EEVFC1H221P	(2)	EEEFC1H221P	(5)	500

An explanation of the taping dimensions can be found on page 84.


Reflow profiles can be found on page 86.

Endurance: 105°C 1000h


■ Frequency Correction Factor of Rated Ripple Current

	Frequency (Hz)				
	50,60	120	1k	10k	100k~
coefficient	0.70	0.75	0.90	0.95	1.00

Temperature Characteristics




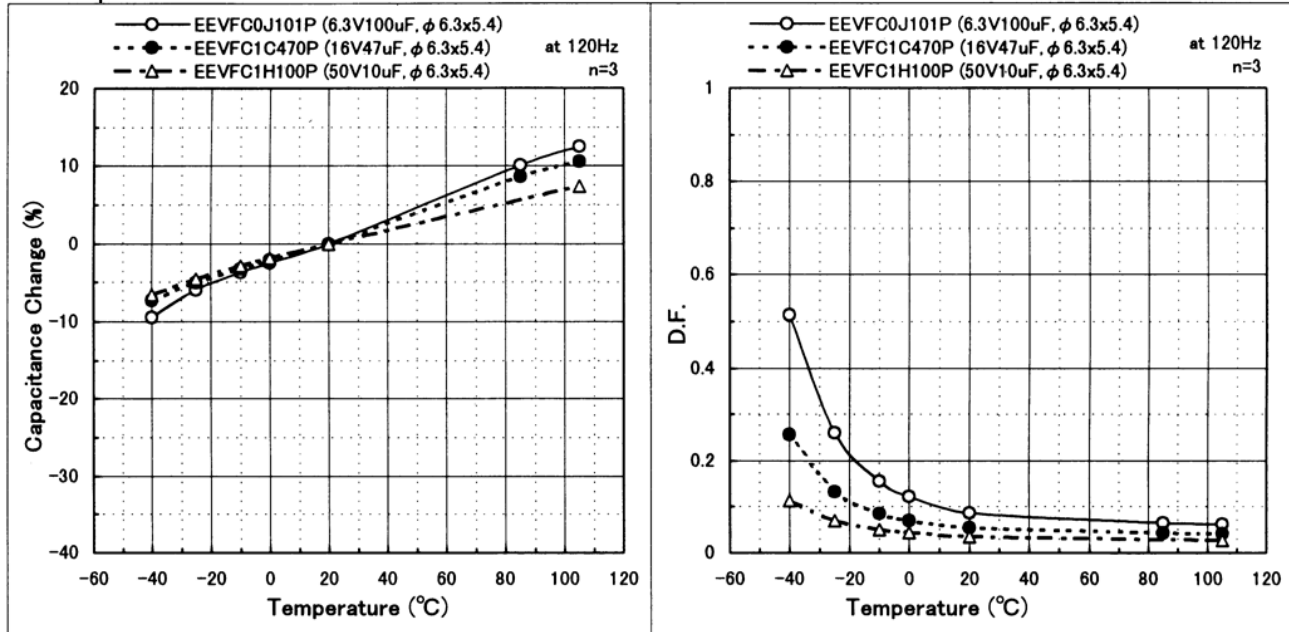


Endurance

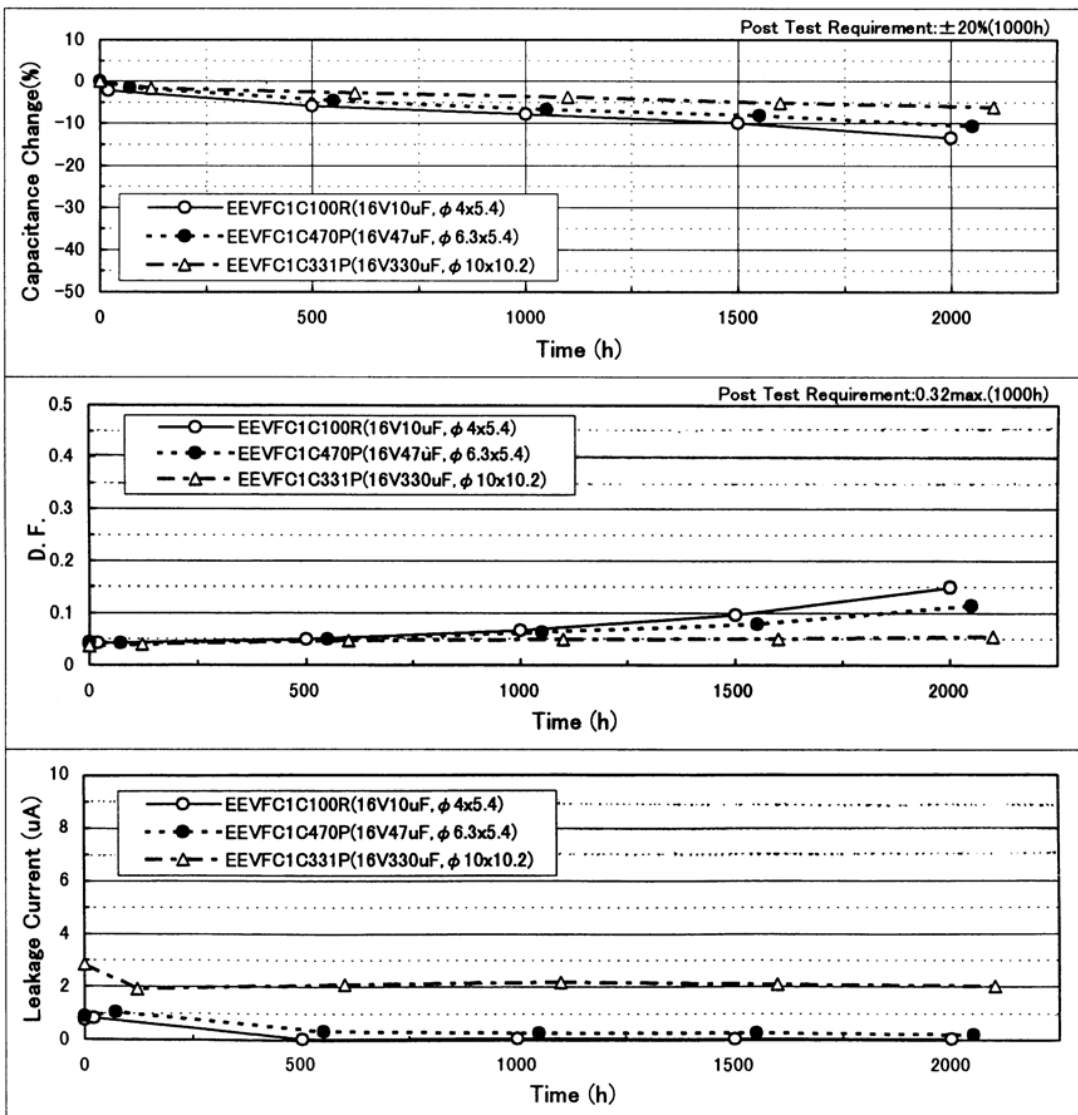



Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.

Frequency Characteristics

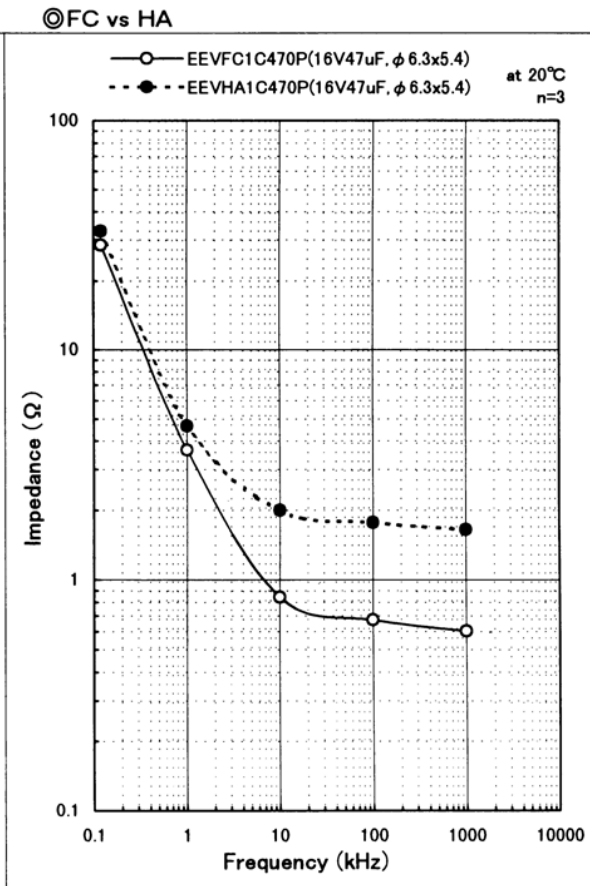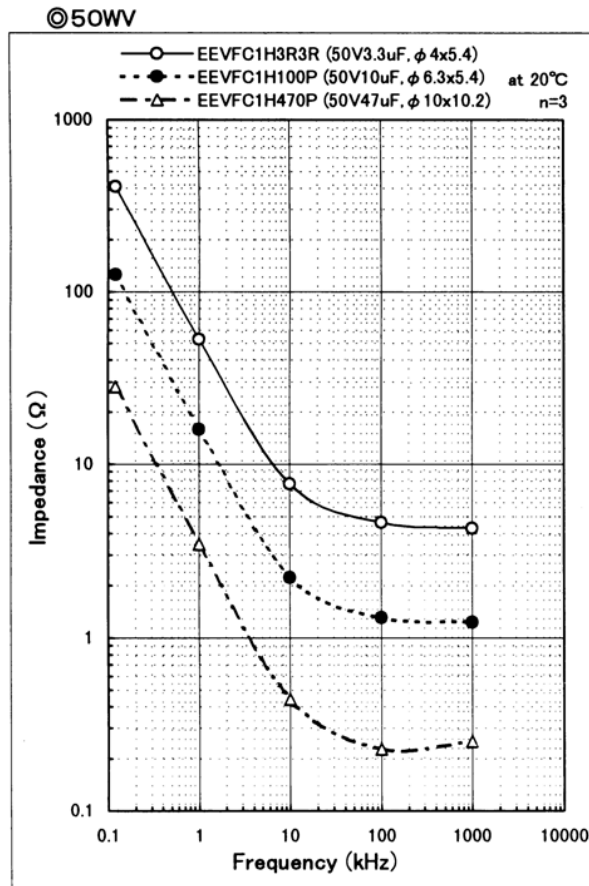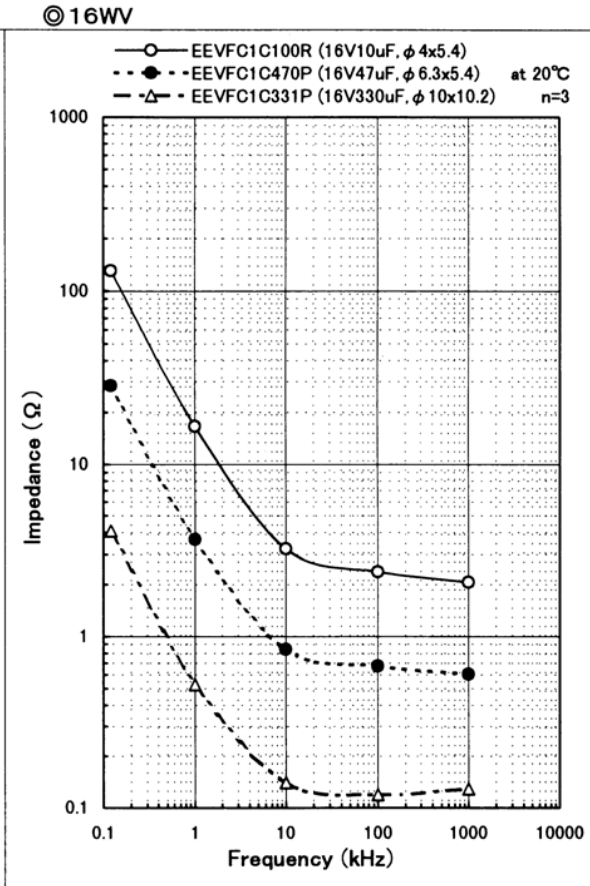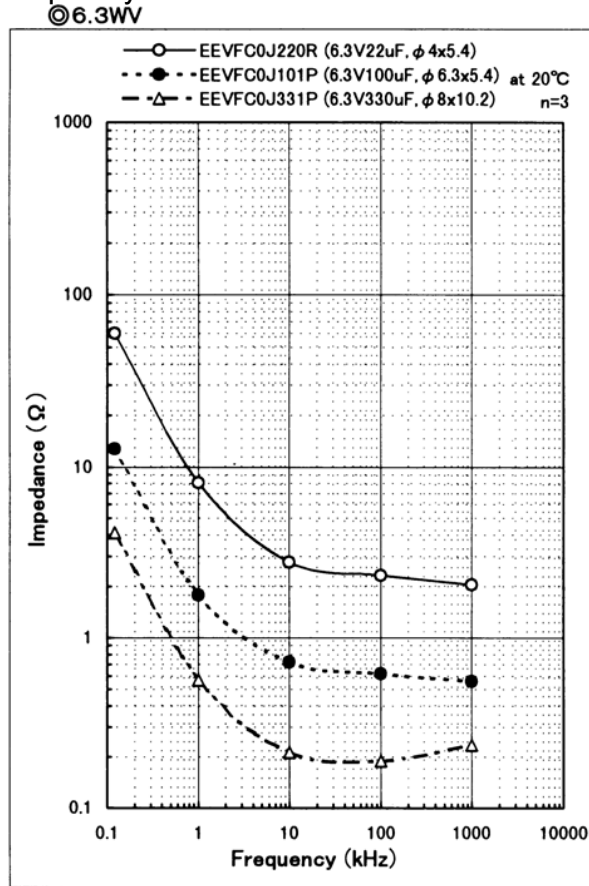






Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.

Temperature Characteristics

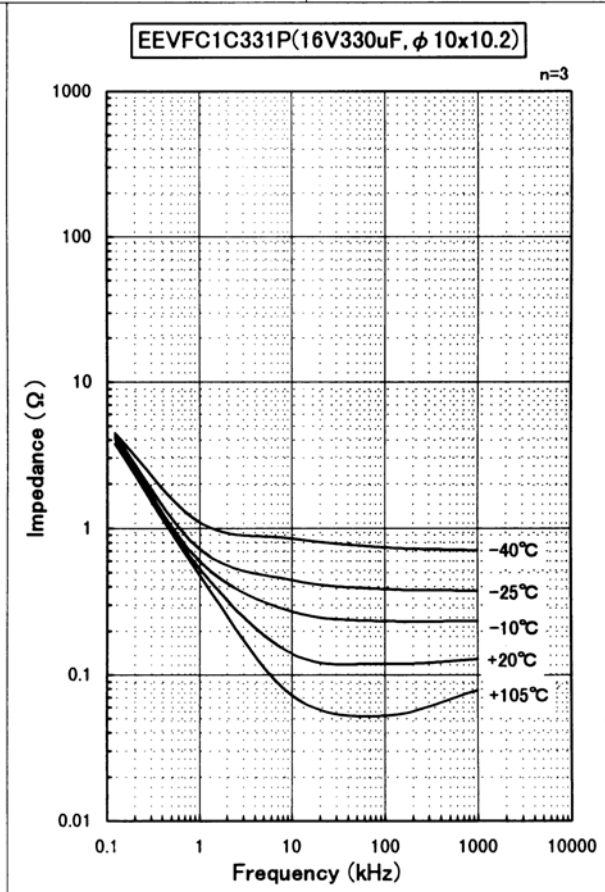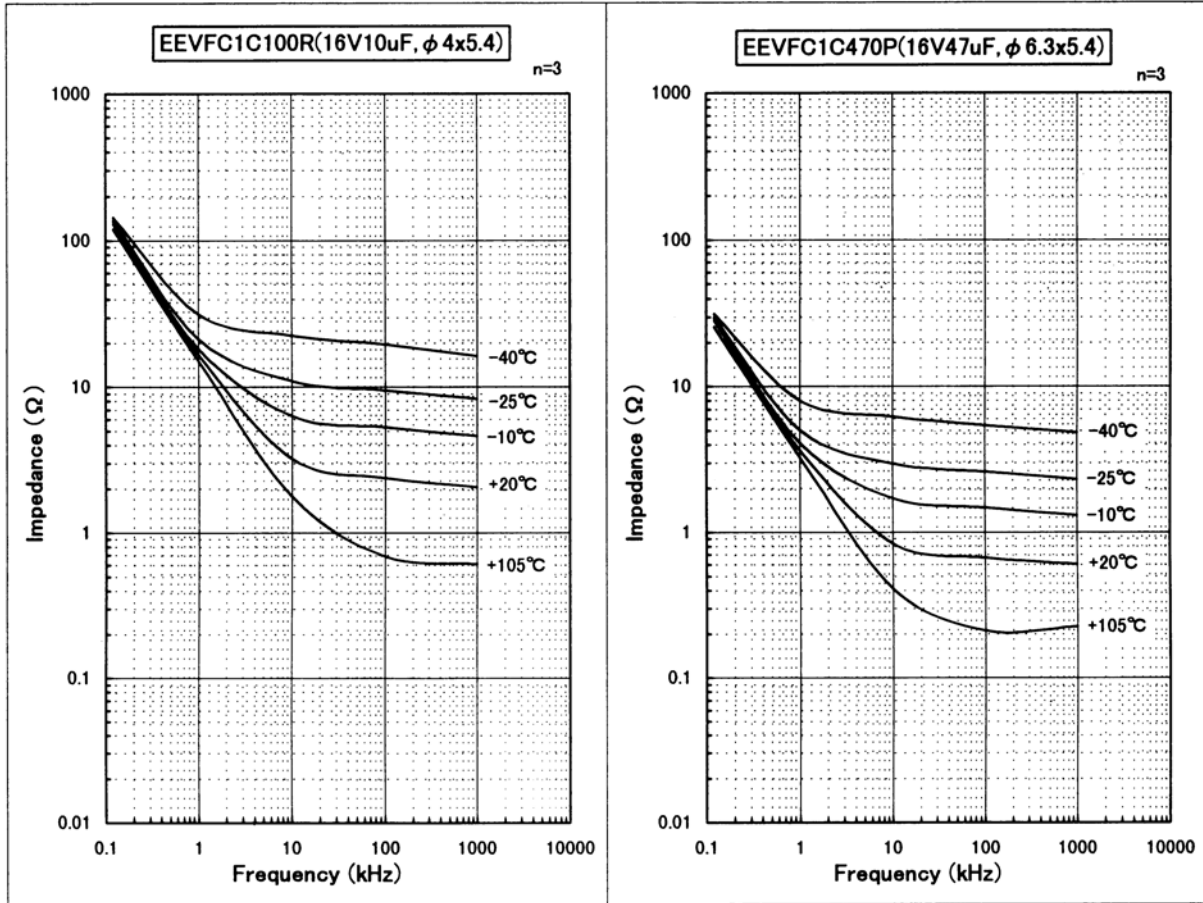

Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.

Pre-fix	Suffix	Case Diameter	RoHS Compliant	Terminal Finish	Reflow Condition		Reflow Chart
					Peak Temperature	Time above 200	
ECE-V	R	3mm to 5mm	No	Sn-Pb	240 for 5 seconds	20 seconds	(1) Fig.1
	P	6mm	No	Sn-Pb	240 for 5 seconds	20 seconds	(1) Fig.1
	P	8mm to 10mm	No	Sn-Pb	230 for 5 seconds	20 seconds	(2) Fig.2
EEV-	R	4mm to 5mm	No	Sn-Pb	240 for 5 seconds	20 seconds	(1) Fig.1
	P	6mm	No	Sn-Pb	240 for 5 seconds	20 seconds	(1) Fig.1
	P	8mm to 10mm	No	Sn-Pb	230 for 5 seconds	20 seconds	(2) Fig.2
	Q	12.5mm	Yes	Sn	230 for 5 seconds	20 seconds	(2) Fig.2 (Except for EB series) (3) Fig.3 (EB series only)
	M	16mm to 18mm	Yes	Sn	230 for 5 seconds	20 seconds	(2) Fig.2 (Except for EB series) (3) Fig.3 (EB series only)
EEE-	R	3mm to 5mm	Yes	Sn-Bi	250 for 5 seconds	60 seconds	(4) Fig.4
	P	6mm	Yes	Sn-Bi	250 for 5 seconds	60 seconds	(4) Fig.4
	P	8mm to 10mm	Yes	Sn-Bi	235 for 5 seconds	60 seconds	(5) Fig.5

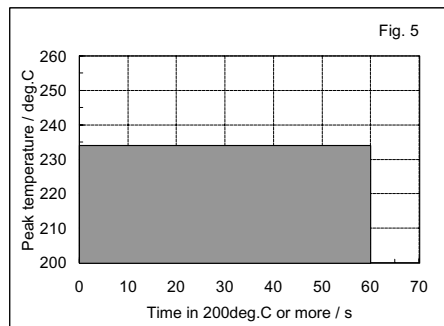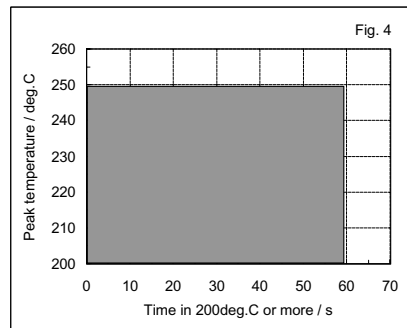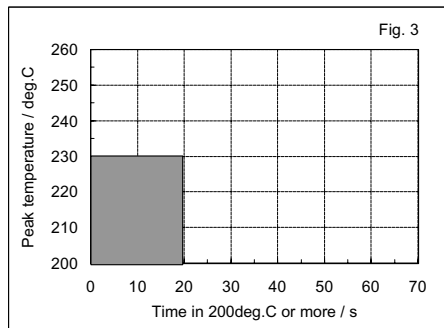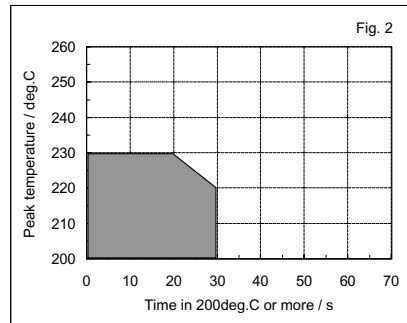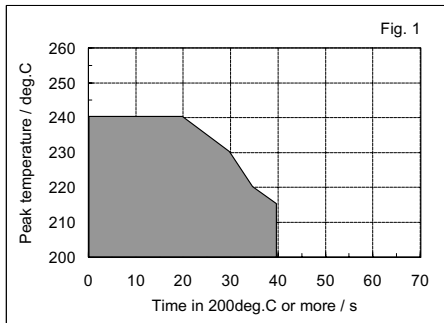

Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.