

User Guide for  
FEBFAN104WMX\_T06U005A  
Evaluation Board

Fairchild PSR Smart Phone  
Battery Charger

Featured Fairchild Products:  
FAN104WMX

***Direct questions or comments  
about this evaluation board to:  
“Worldwide Direct Support”***

**[Fairchild Semiconductor.com](http://Fairchild Semiconductor.com)**

## Table of Contents

1. Introduction.....	3
1.1. Description .....	3
1.2. Features .....	3
2. Evaluation Board Specifications.....	4
3. Photographs.....	5
4. Printed Circuit Board .....	6
5. Schematic .....	7
6. Bill of Materials .....	8
7. Transformer and Winding Specifications .....	9
8. Test Conditions & Test Equipment.....	10
9. Performance of Evaluation Board.....	11
9.1. Input Current .....	11
9.2. Input Wattage at No-Load Condition.....	11
9.3. Startup Time.....	12
9.4. DC Output Rising Time .....	13
9.5. Conversion Efficiency.....	15
9.6. Output Ripple & Noise.....	16
9.7. Dynamic Response.....	17
9.8. Over-Power Protection.....	18
9.9. Hold-up Time .....	19
9.10. Short-Circuit Protection .....	20
9.11. Brownout Test .....	21
9.12. $V_{DD}$ Voltage Level .....	21
9.13. Voltage Stress on MOSFET & Rectifier.....	24
9.14. Constant-Voltage (CV) and Constant-Current (CC) Curves.....	25
9.15. $V_S$ Over-Voltage Protection Test .....	26
9.16. Over-Temperature Protection Test (OTP).....	26
9.17. Electromagnetic Interference (EMI) Tests .....	27
9.18. Surge Test.....	29
9.19. Electrostatic Discharge Capability (ESD) Test.....	29
10. Revision History .....	30

This user guide supports the evaluation kit for the FAN104WMX. It should be used in conjunction with the FAN104WMX datasheet as well as Fairchild's application notes and technical support team. Please visit Fairchild's website at [www.fairchildsemi.com](http://www.fairchildsemi.com).

## 1. Introduction

The FAN104WMX has several functions to achieve standby power consumption lower than 30 mW at 230 V<sub>AC</sub>. Proprietary Burst Mode with lower operation current under light-load conditions and a built-in HV startup circuit to reduce startup resistor power loss both improve performance. By using the FAN104WMX, a smart phone charger can be implemented with few external components and minimized cost.

This document is an engineering report describing a 5 W power supply using the FAN104WMX. This power supply targets the smart phone battery charger market with a <30 mW solution and high efficiency.

### 1.1. Description

This highly integrated PWM controller, FAN104WMX, provides several features to enhance the performance of low-power flyback converters. The proprietary topology enables simplified circuit design for battery-charger applications. The result is a lower-cost, smaller and lighter charger compared to a conventional design or a linear transformer. To minimize standby power consumption, a proprietary Green-Mode function provides off-time modulation to linearly decrease PWM frequency under light-load conditions. Green Mode assists the power supply in meeting power conservation requirements.

### 1.2. Features

- Achieves < 30 mW; Energy Star's 5-Star Level
- Proprietary 500 V High-Voltage JFET Startup Reduces Startup Resistor Loss
- Low Operating Current in the Burst Mode: 600  $\mu$ A
- Constant-Voltage (CV) and Constant-Current (CC) Control without Secondary-Side Feedback Circuitry
- Green Mode: PWM Frequency Linearly-Decreasing
- PWM Frequency at 85 kHz with Frequency Hopping to Solve EMI Problem
- Boundary-Conduction-Mode (BCM) Operation at Lower AC Input Voltage
- Cable Compensation in CV Mode
- V<sub>DD</sub> Under-Voltage Lockout (UVLO) Available
- Built-in Protections:
  - Output Short-Circuit Protection
  - Output Over-Voltage-Protection (V<sub>S</sub> OVP) with Latch Mode
  - V<sub>DD</sub> Over-Voltage-Protection (V<sub>DD</sub> OVP)
  - CS Pin Single-Fault Protection
  - VS Pin Single-Fault Protection
- Over-Temperature-Protection (OTP) with Latch Mode

## 2. Evaluation Board Specifications

All data for this table was measured at an ambient temperature of 25°C.

**Table 1. Summary of Features and Performance**

Description	Symbol	Value	Comments
Input Voltage	$V_{IN.MIN}$	90 V <sub>AC</sub>	Minimum Input Voltage
	$V_{IN.MAX}$	264 V <sub>AC</sub>	Maximum Input Voltage
	$V_{IN.NOMINAL}$	110 V <sub>AC</sub> / 220 V <sub>AC</sub>	Nominal Input Voltage
Input Frequency	$f_{IN}$	60 Hz / 50 Hz	Input Line Frequency
Output Voltage	$V_{OUT.MIN}$	4.75 V	CV: ± 3% Regulation CC: ± 3% Regulation
	$V_{OUT.MAX}$	5.25 V	
	$V_{OUT.NOMINAL}$	5 V	
Output Current	$I_{OUT.NOMINAL}$	1.2 A	
Output Power	$P_{OUT.NOMINAL}$	6 W	
Output Power	$P_{OUT.MAX}$	6.3 W	
Ripple	$V_{RIPPLE}$	< 150 mV	Measured: < 95 mV
Efficiency	Eff.MIN	74.85%	Meets DoE. Standard at Full Load (73.37%)
	Eff.NOMINAL	77.92%	
Temperature	$T_{FAN104}$	< 41°C	At Full Load (Open-Frame)
	$T_{MOSFET}$	< 66°C	
	$T_{SD1}$	< 75°C	
	$T_{D2}$	< 32°C	
	$T_{transformer}$	< 62°C	
Transformer	Core	EPC-13	<p>The core volume of the low-profile EPC-13 is 66% lower than the* conventional type of transformer core.</p> <p>The height of the low-profile EPC-13 core is 57% less than the * conventional type of transformer core.</p> <p>*EPCxxx, (refer to page 9)</p>

### 3. Photographs

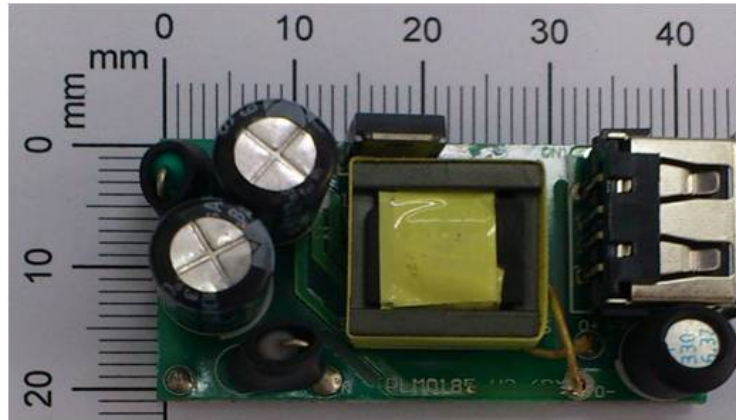


Figure 1. Photograph (32.4x 26 mm<sup>2</sup>) Top-View

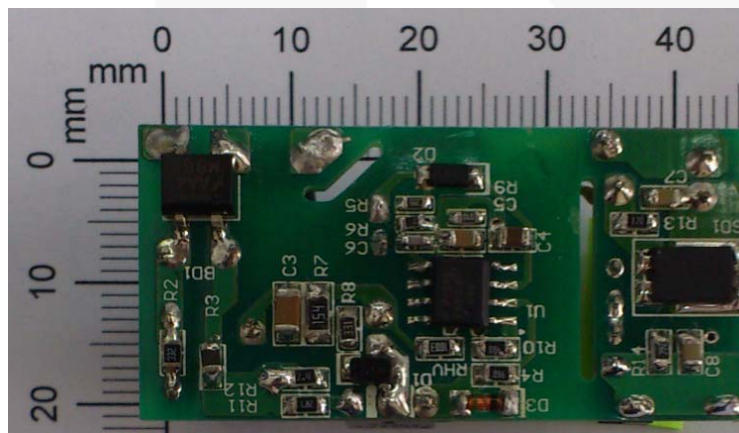


Figure 2. Photograph (32.4 (H) x 26 mm<sup>2</sup>(W)) Bottom-View

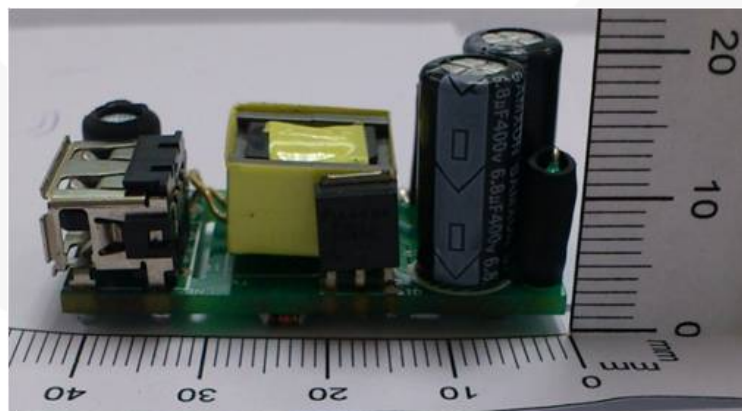


Figure 3. Photograph (32.4 (L) x 21 mm<sup>2</sup>(H)) Side-View





## 6. Bill of Materials

Component Series	Part Name	Specification	Qty	Part No.
02-3510005-10	DIP Res. 1 W-S 10 Ω ±5%	TAPING	1	R1
02-5112731-00	SMD Res. 0603 127 kΩ ±1%	REEL	1	R9
02-5123221-00	SMD Res. 0603 23.2 kΩ ±1%	REEL	1	R6
02-5151121-00	SMD Res. 0603 51.1 kΩ ±1%	REEL	1	R5
02-5210105-00	SMD Res. 0805 100 Ω ±5%	REEL	1	R10
02-5210405-00	SMD Res. 0805 100 kΩ ±5%	REEL	1	RHV
02-5212005-00	SMD Res. 0805 12 Ω ±5%	REEL	1	R13
02-5222105-00	SMD Res. 0805 220 Ω ±5%	REEL	1	R8
02-5224A05-00	SMD Res. 0805 2.4 Ω ±5%	REEL	1	R11
02-5227A05-00	SMD Res. 0805 2.7 Ω ±5%	REEL	1	R12
02-5233205-00	SMD Res. 0805 3.3 kΩ ±5%	REEL	2	R2, R3
02-5236011-00	SMD Res. 0805 3.6 kΩ ±1%	REEL	1	R14
02-52910A5-00	SMD Res. 0805 91 Ω ±5%	REEL	1	R4
02-5315405-00	SMD Res. 1206 150 kΩ ±5%	REEL	1	R7
03-3218031-00	SMD NPO 0603 18 P 50 V ±10%	REEL	1	C6
03-3310239-00	0805 X7R ±10% 102 P 50 V	REEL	1	C7
03-3310439-00	0805 X7R ±10% 104 P 50 V	REEL	1	C8
03-332201A-00	0805 X5R ±20% 22 μF 25 V	No: GRM21BR61E226ME44	1	C4
03-3339339-00	0805 X7R ±10% 393 P 50 V	REEL	1	C5
03-3447179-00	1206 X7R ±10% 471 P 1 kV	REEL	1	C3
03-5068AC1-01	Electrolytic Cap. 6 μF 400 V 105°C	8*16 RADIAL KM Unpackaged	2	C1, C2
03-7033101-01	OCVZ Cap. 330 μF 6.3 V 105°C	OVZ331M0JTR-0606,6.3*5.9 mm	1	C9
04-1000328-00	SMD Inductor TRN0328(10 μH ±20%/0805)	No:LQM21FN100M80L, Supertrade	1	L0
04-1136102-00	DIP Inductor 1 mH ±10%	EC36-102 K	1	L1
04-2000329-00	Transformer TRN0329	EPC13, Horizontal, Lm=1.3 mH	1	TX1
07-03070F1-00	SMD Diode MMSD3070	Fairchild Semiconductor	1	D2
07-0L41481-00	SMD Diode LL4148	1 A/100 V SOD80	1	D3
07-0400711-00	SMD Diode CGRM4007-HF	1 A/1000 V,SOD-123,COMCHIP	1	D1
07-110U450-11	SMD Schottky Diode SBR10U45SP5	10 A SBR, PowerDIR5	1	SD1
07-1MB6S0F-11	SMD Bridge Rectifier MB6S	Fairchild Semiconductor	1	BD1
09-12N600F-00	MOSFET FQU2N60CTU	Fairchild Semiconductor	1	Q1
11-EN104WF-11	SMD IC FAN104WMX	Fairchild Semiconductor	1	U1
38-0000002-00	CANADA Silicone ES2482W 333 ml		0	
42-J100432-10	USB JC0010 4411-02004L	Short Type 10*13 mm	1	CN1
54-1020653-00	MCH0653	Heat-Shrinkable Tube 6ψ10 mm	3	L1, R1, C9
70-PLM0185-03	PCB PLM0185(B) REV 3.	For FAN104 5 W 1*5 Connected	1	



## 7. Transformer and Winding Specifications

- Core: EPC-13 (PC-40)
- Bobbin: 10 pins

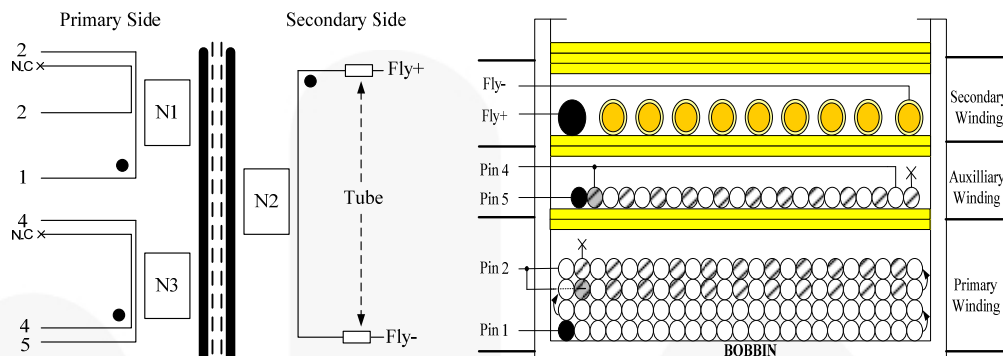


Figure 7. Transformer Specifications & Construction

Table 2. Winding Specifications

No.	Pin (S → F)	Wire	Turns	Isolation Tape Turns	Notes
W1	1 → 2	2UEW 0.12φ*1	132	2	Layer-1: 48 Turns Layer-2: 47 Turns Layer-3: 23 + 23 Turns (Parallel) Layer-4: 14 + 14 Turns (Parallel)
	2 → NC		37		
W2	5 → 4	2UEW 0.18φ*1	16	2	
	4 → NC				
W4	Fly+ → Fly-	TEX-E 0.45φ*1	10	2	
		Core Rounding Tape		3	
Core Shielding		Cooper Sheet	1	2	Cooper shielding should be close with core

Table 3. Electrical Characteristics

Item	Pin	Specification	Remark
Inductance	1 - 2	1.3 mH ±10%	1 kHz, 1 V

## 8. Test Conditions & Test Equipment

**Table 4. Test Conditions & Test Equipment**

<b>Evaluation Board #</b>	FEBFAN104WMX_TU06005A
<b>Test Date</b>	2012-08-15
<b>Test Temperature</b>	25°C
<b>Test Equipment</b>	AC Power Source: 6801 by EXTECH ELECTRONICS Power Analyzer: WT210 by YOKOGAWA Electronic Load: 63030 by CHROMA Automatic Power Tester: 6312A & 63102A by CHROMA Multi Meter: BM817a by BRYMEN Oscilloscope: 24MXs-B by LeCroy EMI Test Receiver: ESCS30 by ROHDE & SCHWARZ Thermometer: Therma CAM SC640 by FLIR SYSTEMS

## 9. Performance of Evaluation Board

### 9.1. Input Current

Test Conditions

Measure the AC input current at maximum loading.

**Table 5. Test Results**

Input Voltage	Input Current
90 V <sub>AC</sub> / 60 Hz	122.2 mA
264 V <sub>AC</sub> / 50 Hz	61.1 mA

### 9.2. Input Wattage at No-Load Condition


Test Conditions

Measure the input wattage and output voltage at no load.

**Table 6. Test Results**

Input Voltage	Input wattage	Output Voltage	Specification
90 V <sub>AC</sub> / 60 Hz	25.1 mW	5.15 V	< 30 mW
115 V <sub>AC</sub> / 60 Hz	25.4 mW	5.19 V	
230 V <sub>AC</sub> / 50 Hz	26.7 mW	5.11 V	
264 V <sub>AC</sub> / 50 Hz	28.6 mW	5.13 V	

Measured Waveforms

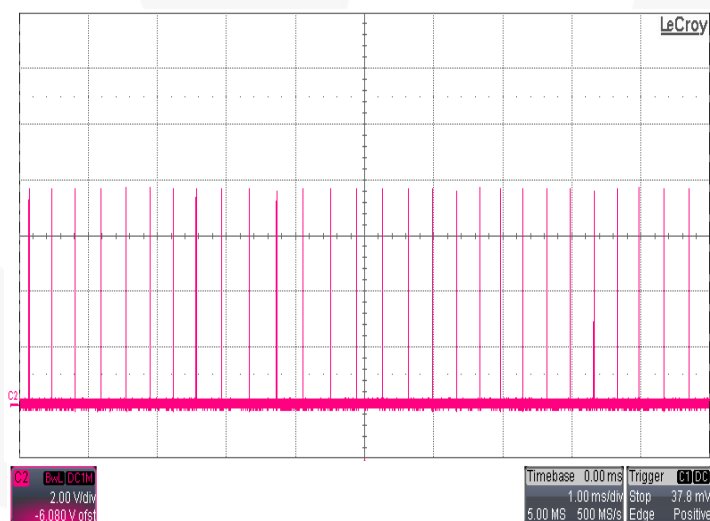

**Figure 8. 90 V<sub>AC</sub> / 60 Hz, C2 [V<sub>gs</sub>] at No Load**

Measured Waveforms

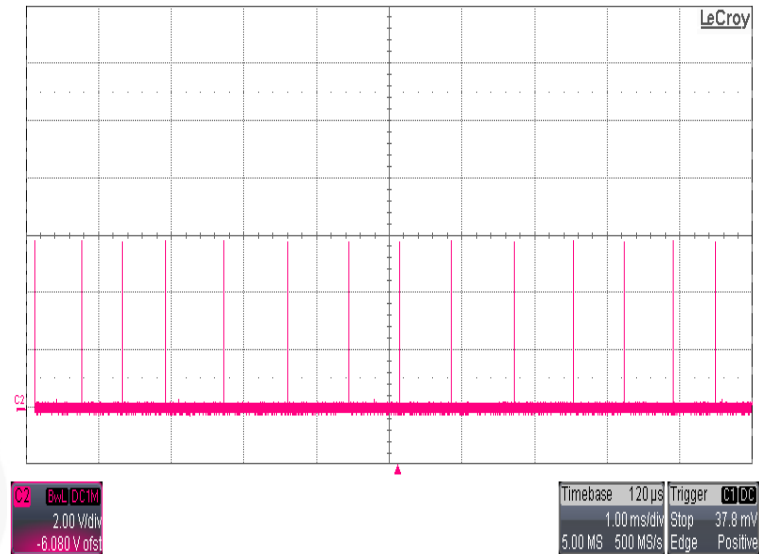


Figure 9. 264 V<sub>AC</sub> / 50 Hz, C2 [V<sub>GS</sub>] at No Load

9.3. Startup Time

Test Conditions

Set the output at maximum loading. Measure the time interval between the AC line on condition and a stable output condition.

Table 7. Test Results

Input Voltage	Startup Time	Specification
90 V <sub>AC</sub> / 60 Hz	150 ms	< 3 s
264 V <sub>AC</sub> / 50 Hz	73 ms	

Measured Waveforms

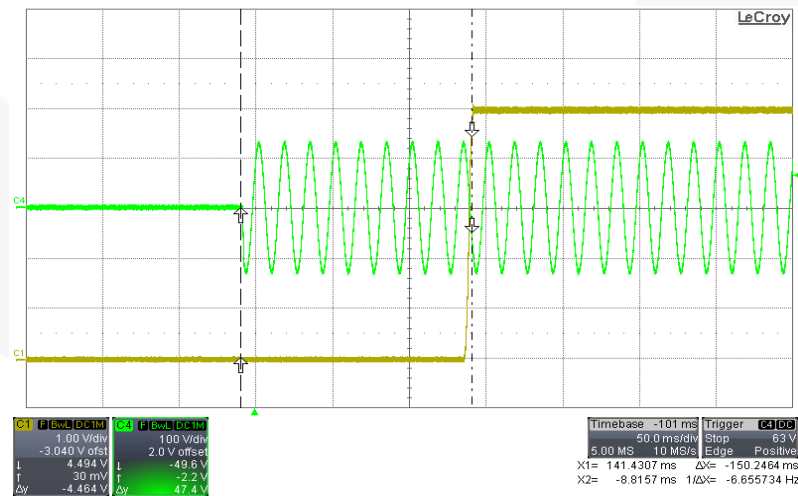


Figure 10. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C4 [V<sub>AC</sub>] at Maximum Load

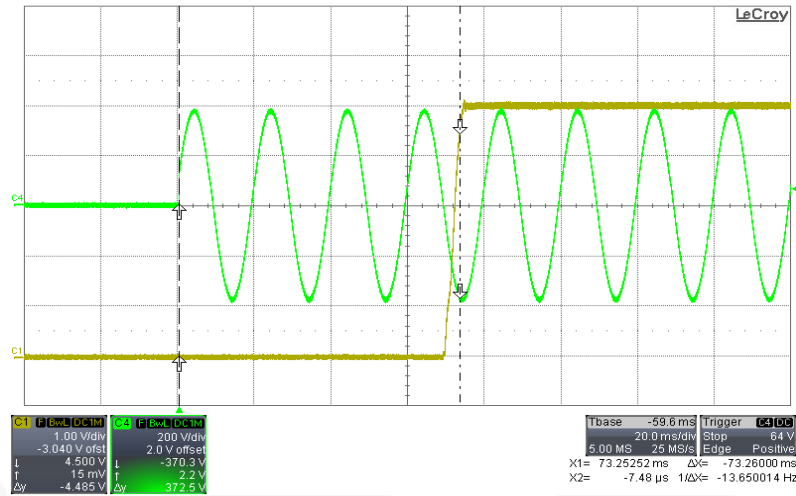


Figure 11. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C4 [V<sub>AC</sub>] at Maximum Load

### 9.4. DC Output Rising Time

#### Test Conditions

Set the output at maximum load and no load. Measure the time interval between 10% and 90% output during startup.

Table 8. Test Results

Input Voltage	No Load	Maximum Load	Specification
90 V <sub>AC</sub> / 60 Hz	2.88 ms	3.50 ms	< 20 ms
264 V <sub>AC</sub> / 50 Hz	2.64 ms	3.59 ms	

#### Measured Waveforms

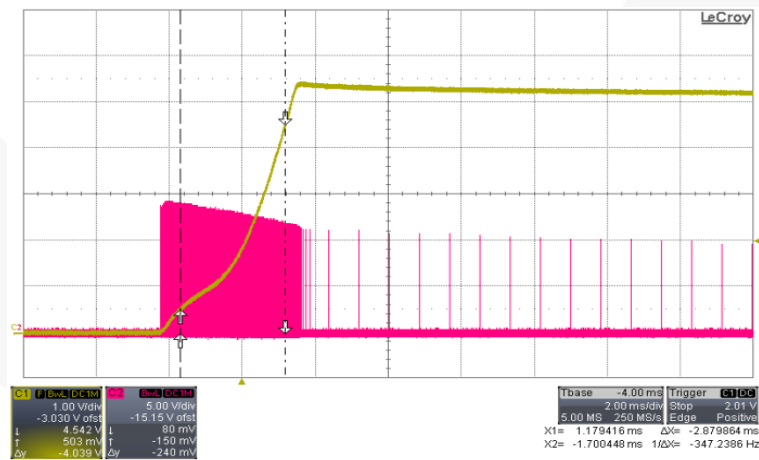


Figure 12. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C2 [V<sub>es</sub>] at No Load

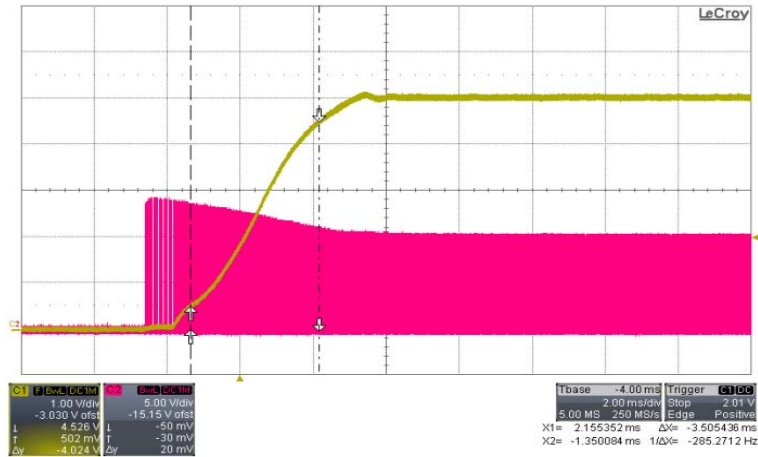


Figure 13. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>] at Maximum Load

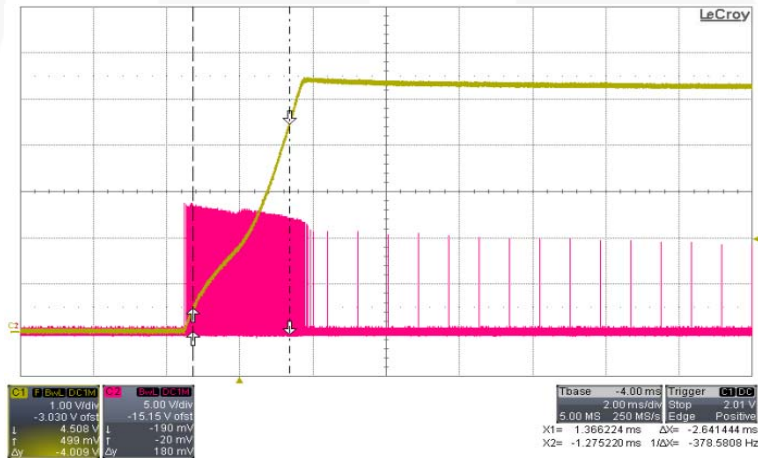


Figure 14. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>] at No Load

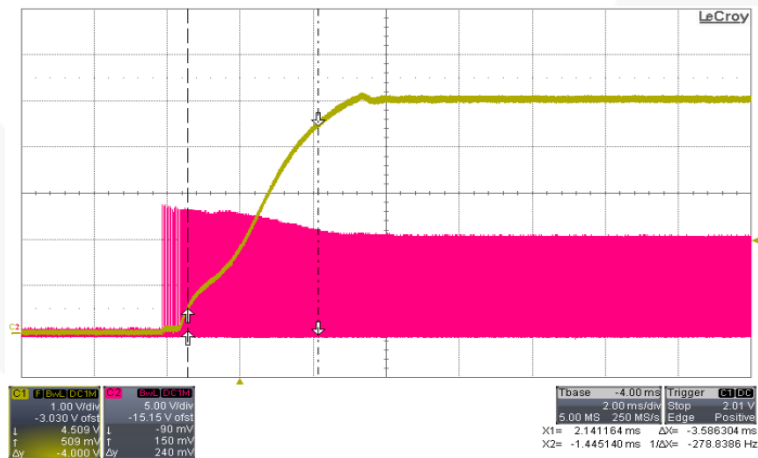


Figure 15. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>] at Maximum Load

## 9.5. Conversion Efficiency

Test Conditions


Measure the input power and output power at maximum loading.

**Table 9. Test Results**

Input Voltage	Input Power	Output Power	Efficiency	Specification
90 V <sub>AC</sub> / 60 Hz	6.428 W	5.02 W	78.09%	> 73.37%
115 V <sub>AC</sub> / 60 Hz	6.454 W	5.10 W	79.02%	
230 V <sub>AC</sub> / 50 Hz	6.620 W	5.09 W	76.97%	
264 V <sub>AC</sub> / 50 Hz	6.585 W	5.11 W	77.60%	

**Table 10. Average Efficiency Test Results**

Input Voltage	Efficiency					Specification
	25% Load	50% Load	75% Load	100% Load	Avg.	
115 V <sub>AC</sub> / 60 Hz	75.40%	79.50%	78.69%	79.02%	78.15%	> 73.37%
230 V <sub>AC</sub> / 50 Hz	70.00%	76.44%	76.08%	76.87%	74.85%	

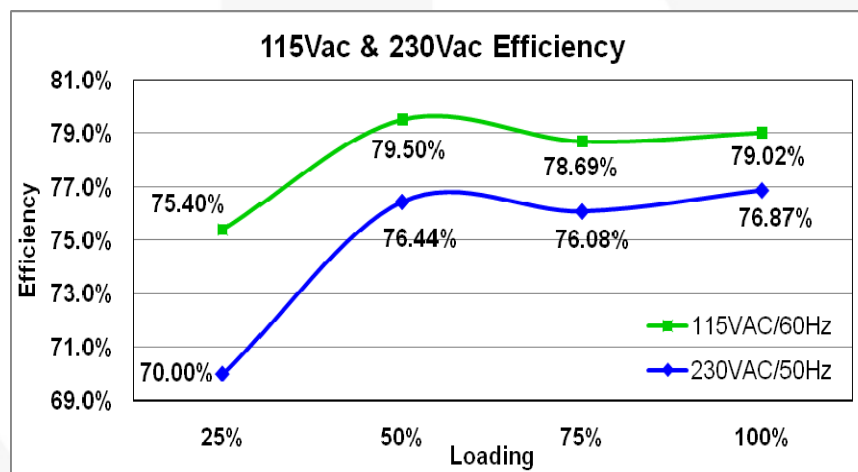

**Figure 16. Average Efficiency Test Results**

## 9.6. Output Ripple & Noise


### Test Condition

Ripple and noise are measured by using a 20 MHz bandwidth-limited oscilloscope with a 10  $\mu$ F capacitor paralleled with a high-frequency 0.1  $\mu$ F capacitor across each output.


**Table 11. Test Results**

Input Voltage	Output Ripple at No Load	Output Ripple at Maximum Load	Specification
90 V <sub>AC</sub> / 60 Hz	18.6 mV	81.4 mV	< 150 mV
115 V <sub>AC</sub> / 60 Hz	21.2 mV	83.2 mV	
230 V <sub>AC</sub> / 50 Hz	26.7 mV	90.3 mV	
264 V <sub>AC</sub> / 50 Hz	27.2 mV	95.0 mV	

### Measured Waveforms

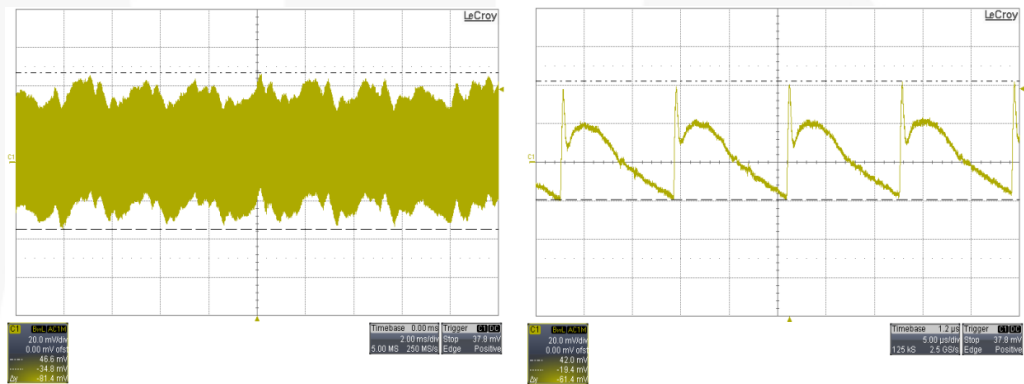

**Figure 17. 90 V<sub>AC</sub> / 60 Hz, C1 [Vo] at Maximum Load**

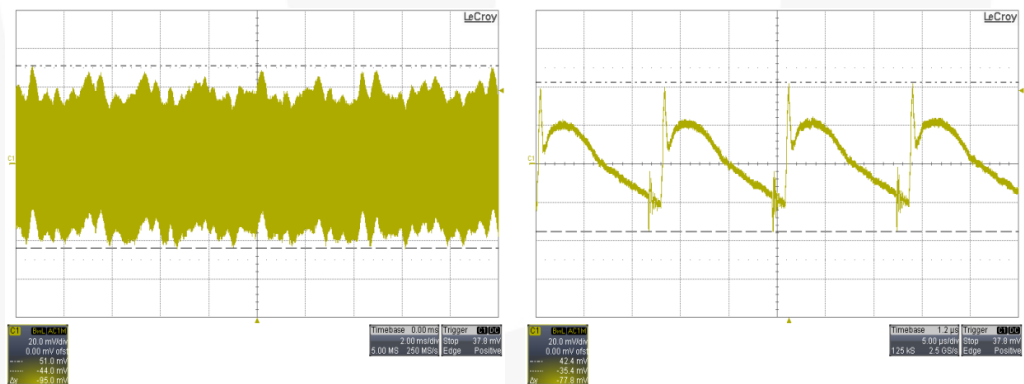

**Figure 18. 264 V<sub>AC</sub> / 50 Hz, C1 [Vo] at Maximum Load**



## 9.7. Dynamic Response


Test Conditions

Dynamic loading (0 %~50 %) of the full load, 5 ms duty cycle, 2.5 A/ $\mu$ s rise/fall time.


**Table 12. Test Results**

Input Voltage	Overshoot	Undershoot
90 V <sub>AC</sub> / 60 Hz	5.218 V	4.034 V
264 V <sub>AC</sub> / 50 Hz	5.206 V	4.028 V

Measured Waveforms

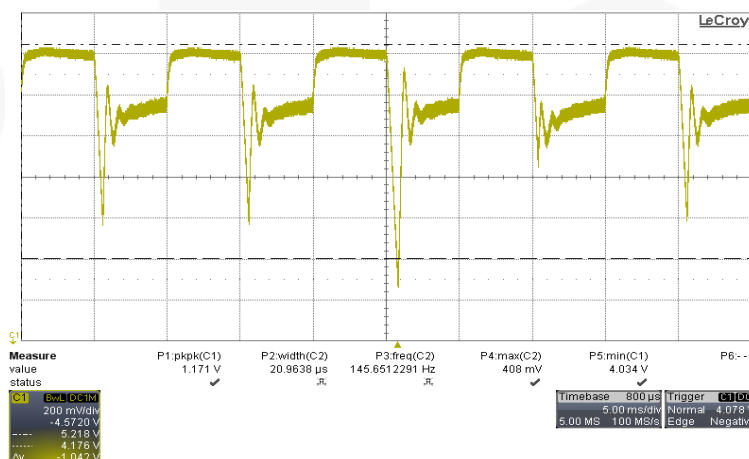

**Figure 19. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>o</sub>] at Dynamic Response**

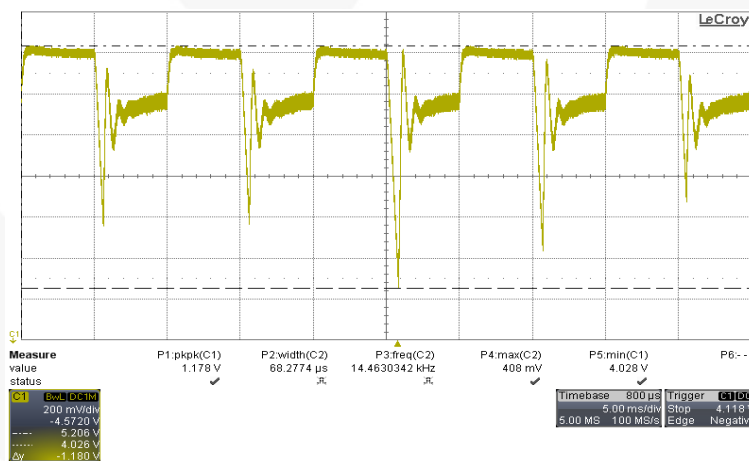

**Figure 20. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>o</sub>] at Dynamic Response**

## 9.8. Over-Power Protection

Test Conditions

Increase the output loading gradually. Measure the output power.

**Table 13. Test Results**

Input Voltage	Output Power
90 V <sub>AC</sub> / 60 Hz	5.82 W
115 V <sub>AC</sub> / 60 Hz	5.85 W
230 V <sub>AC</sub> / 50 Hz	5.92 W
264 V <sub>AC</sub> / 50 Hz	5.94 W

## 9.9. Hold-up Time


### Test Conditions

Set the output at maximum loading. Measure the time interval between AC line off condition and the output voltage falling to the lower limit of rated value. The AC waveform should be off at zero degrees.


**Table 14. Test Results**

Input Voltage	Hold-up Time
90 V <sub>AC</sub> / 60 Hz	10.9 ms
264 V <sub>AC</sub> / 50 Hz	133 ms

### Measured Waveforms

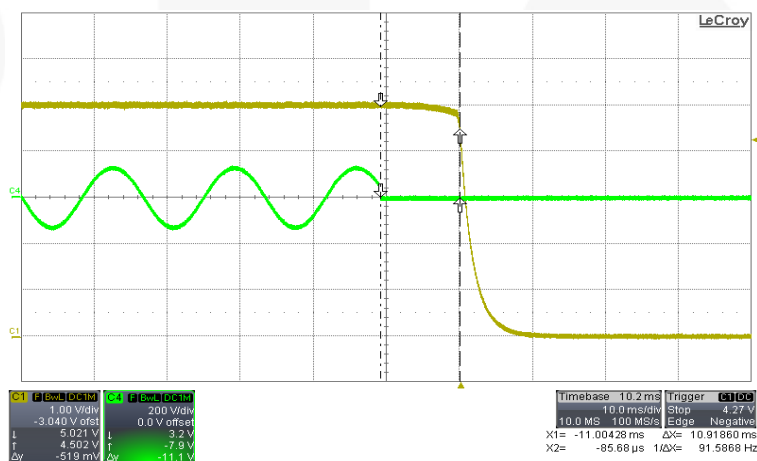

**Figure 21. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C4 [V<sub>AC</sub>] at Maximum Load**

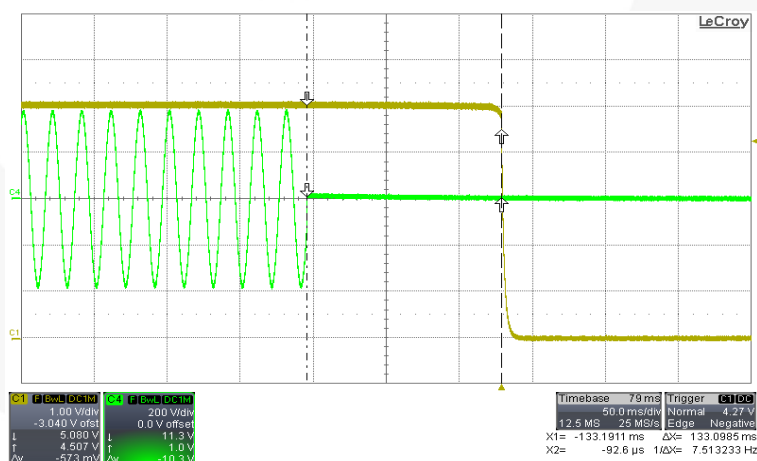

**Figure 22. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C4 [V<sub>AC</sub>] at Maximum Load**

## 9.10. Short-Circuit Protection


### Test Conditions

Short the output of the power supply. The power supply should enter Hiccup Mode protection. Input power should be less than 2 W.


**Table 15. Test Results**

Input Voltage	Input Power at Maximum Load	Input Power at Minimum Load	Specification
90 V <sub>AC</sub> / 60 Hz	0.361 W	0.372 W	<2 W
264 V <sub>AC</sub> / 50 Hz	0.969 W	0.991 W	

### Measured Waveforms

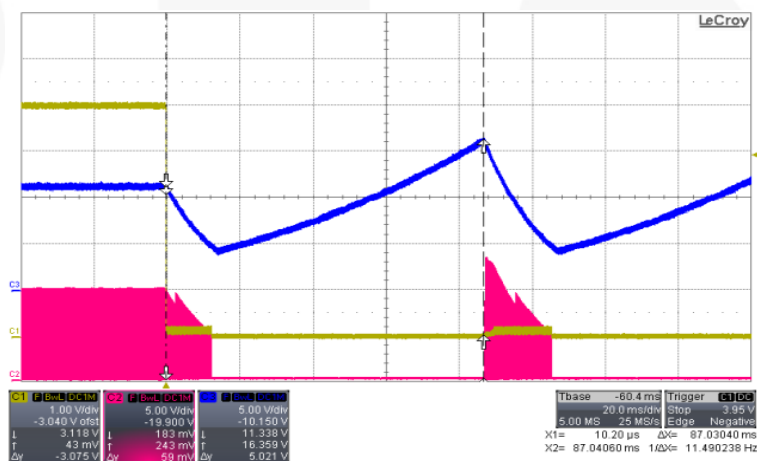

**Figure 23. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>o</sub>], C2 [V<sub>gs</sub>], C3 [V<sub>ds</sub>] at No Load Output Short**

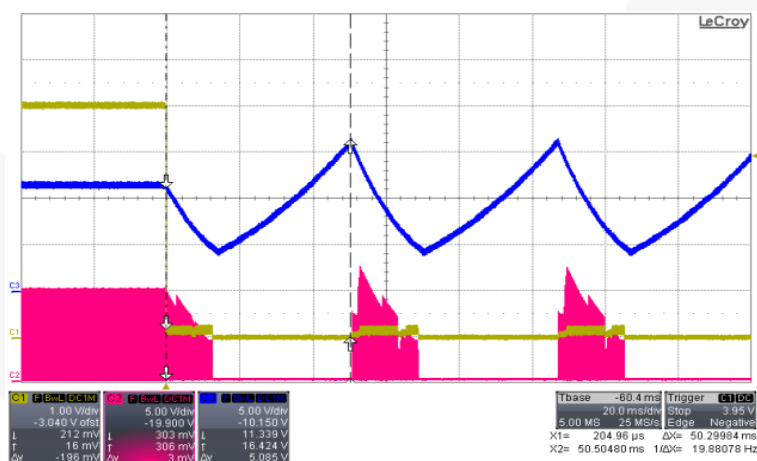

**Figure 24. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>o</sub>], C2 [V<sub>gs</sub>], C3 [V<sub>ds</sub>] at Maximum Load Output Short**

### 9.11. Brownout Test

Test Conditions

Input Voltage	Input Wattage	Output Voltage
90 V <sub>AC</sub> / 60 Hz	6.832 W	5.164 V
85 V <sub>AC</sub> / 60 Hz	6.841 W	5.160 V
80 V <sub>AC</sub> / 60 Hz	6.860 W	5.154 V
75 V <sub>AC</sub> / 60 Hz	6.903 W	5.140 V
70 V <sub>AC</sub> / 60 Hz	6.97 W	5.124 V
65 V <sub>AC</sub> / 60 Hz	7.08 W	5.096 V
63 V <sub>AC</sub> / 60 Hz	Brownout	Brownout

**Table 16. Test Results**


Recovery Voltage	Input Power	Output Voltage
64 V <sub>AC</sub> / 60 Hz	7.12 W	5.09 V

### 9.12. V<sub>DD</sub> Voltage Level

**Table 17. Test Results**

Input	V <sub>DD</sub> Level at No Load	V <sub>DD</sub> Level at Max. Load	V <sub>DD</sub> Level at OPP	Max. V <sub>DD</sub> Level at Output Short	Specification
90 V <sub>AC</sub> / 60 Hz	7.5 V	11.4 V	11.9 V	16.4 V	< 24 V
264 V <sub>AC</sub> / 50 Hz	7.4 V	11.8 V	12.1 V	16.4 V	

Measured Waveforms

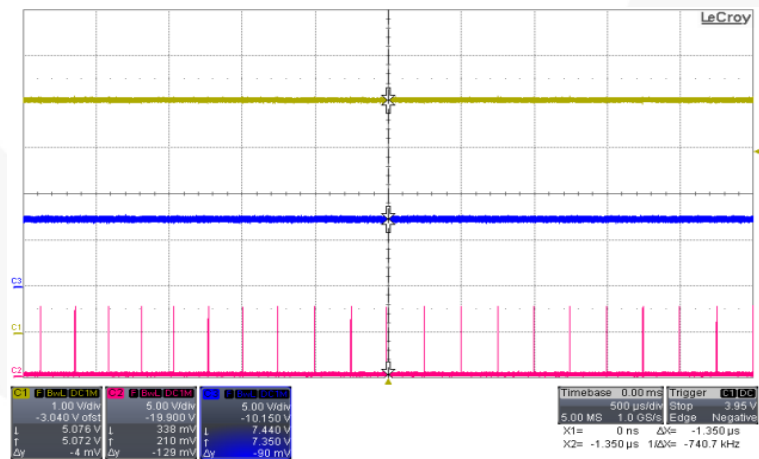

**Figure 25. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C2 [V<sub>es</sub>], C3 [V<sub>DD</sub>] at No Load**

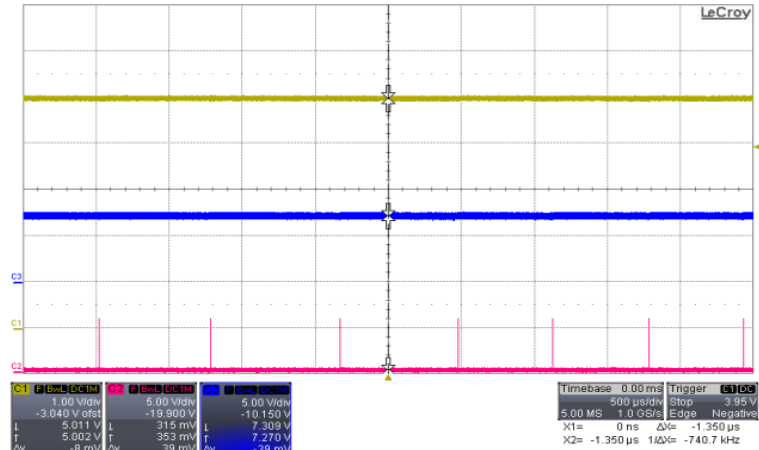


Figure 26. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>], C3 [V<sub>DD</sub>] at No Load

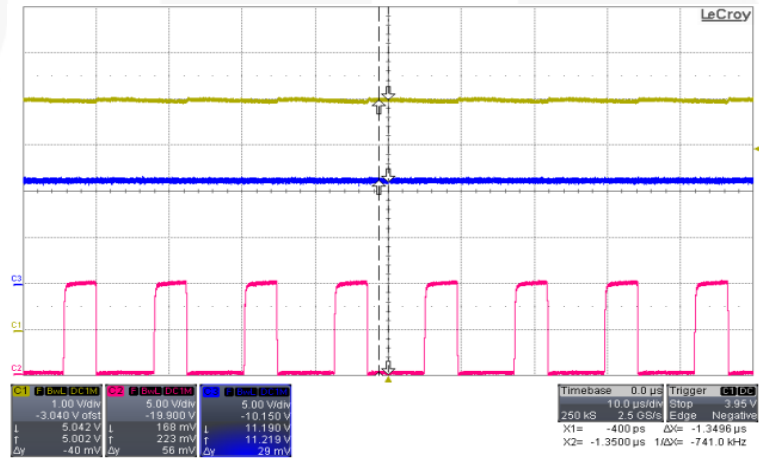


Figure 27. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>], C3 [V<sub>DD</sub>] at Maximum Load

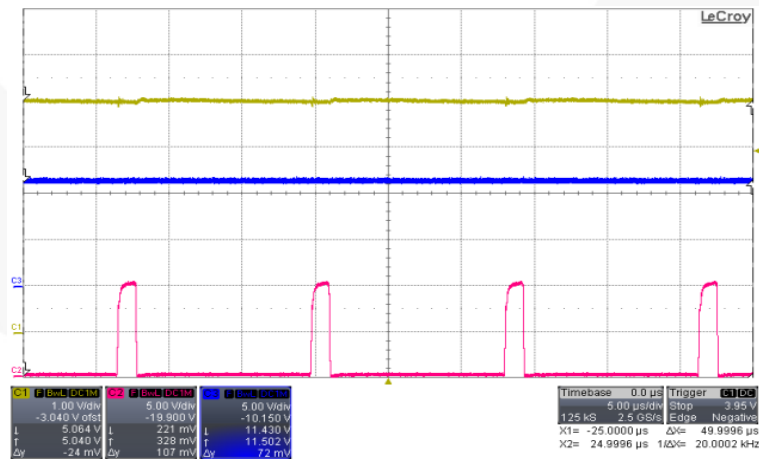


Figure 28. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>], C3 [V<sub>DD</sub>] at Maximum Load

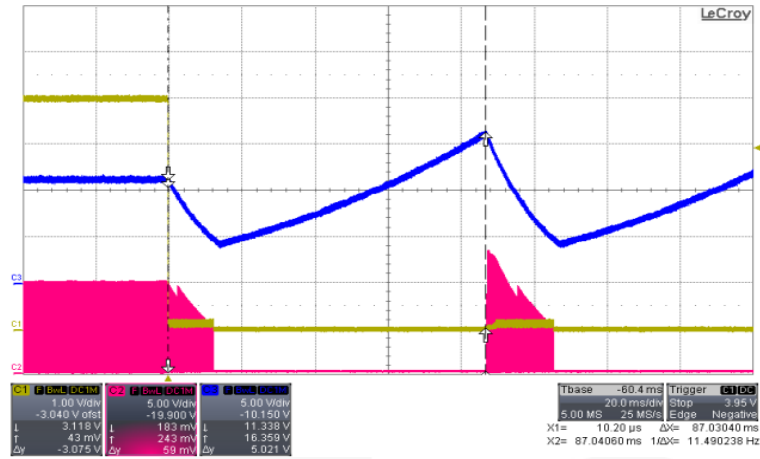


Figure 29. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>], C3 [V<sub>DD</sub>] at Output Short

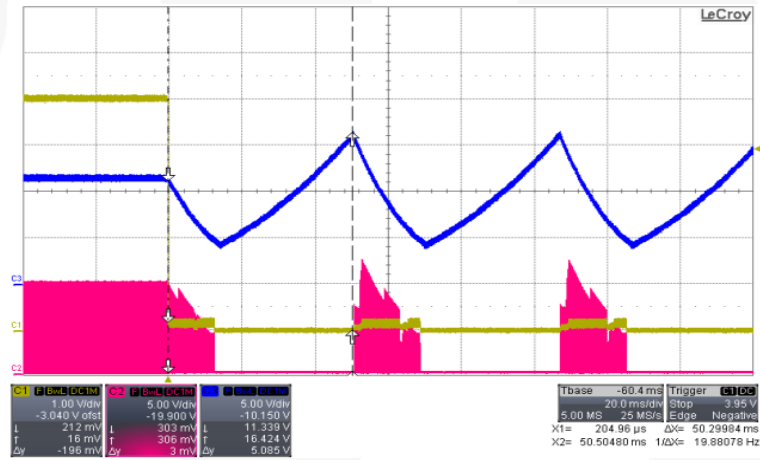


Figure 30. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>], C3 [V<sub>DD</sub>] at Output Short

### 9.13. Voltage Stress on MOSFET & Rectifier


#### Test Conditions

Measure the voltage stress on the MOSFET and the secondary rectifier under the below specified conditions.


**Table 18. Test Results**

Input Voltage	Stress On MOSFET	Rating	Stress On Output Rectifier	Rating
90 V <sub>AC</sub> / 60 Hz at Maximum Load	295 V	600V	19.7 V	45 V
90 V <sub>AC</sub> / 60 Hz at Maximum Load, Startup	296 V		19.7 V	
90 V <sub>AC</sub> / 60 Hz at Maximum Load, Output Short	302 V		20.4 V	
264 V <sub>AC</sub> / 50 Hz at Maximum Load	554 V		42.4 V	
264 V <sub>AC</sub> / 50 Hz at Maximum Load, Startup	554 V		42.4 V	
264 V <sub>AC</sub> / 50 Hz at Maximum Load, Output Short	564 V		45 V	
264 V <sub>AC</sub> / 50 Hz at Maximum Load, Turn Off	564 V		45 V	

#### Measured Waveforms

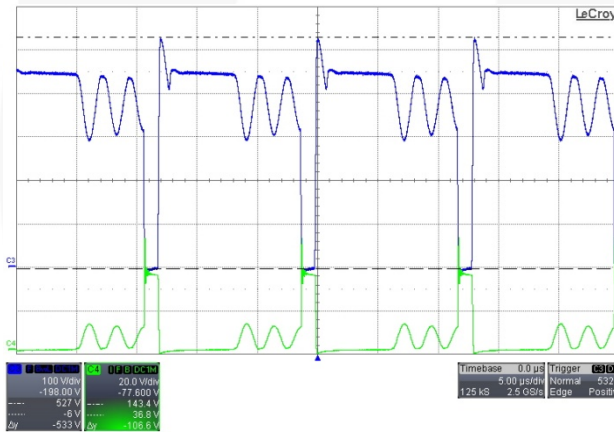

**Figure 31.** 264 V<sub>AC</sub> / 50 Hz, C3 [V<sub>DS</sub>], C4 [V<sub>DIODE</sub>] at Maximum Load

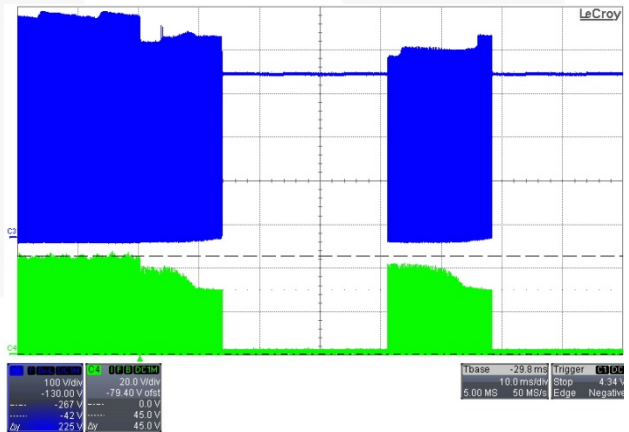

**Figure 32.** 264 V<sub>AC</sub>/50 Hz, C3 [V<sub>DS</sub>], C4 [V<sub>DIODE</sub>] at Output Short



9.14. Constant-Voltage (CV) and Constant-Current (CC) Curves

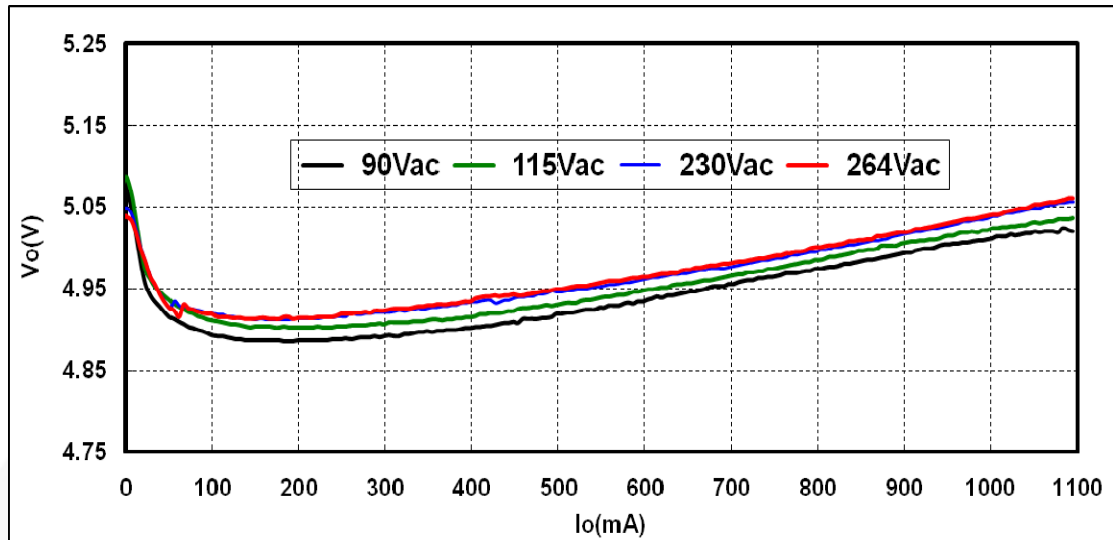


Figure 33. Constant – Voltage (CV) Curves

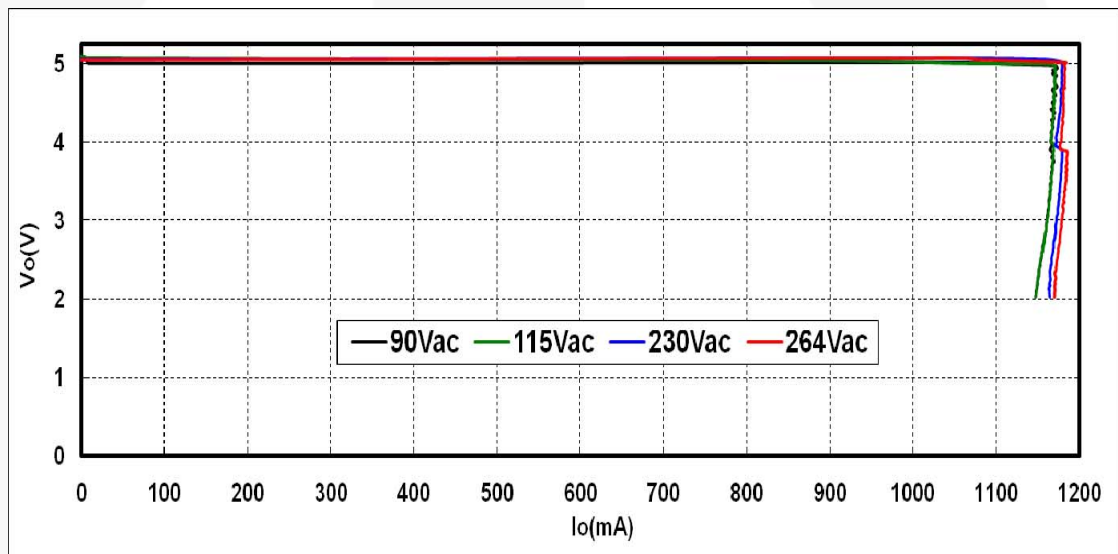


Figure 34. Constant – Current (CC) Curves

### 9.15. $V_S$ Over-Voltage Protection Test

#### Test Conditions

Measure the maximum output voltage when the auxiliary feedback signal is disabled ( $V_S$  pin low-side resistor opened).

**Table 19. Test Results**


Input Voltage	Maximum Output at No Load	Maximum Output at Maximum Load
90 V <sub>AC</sub> / 60 Hz	6.8 V	0 V
264 V <sub>AC</sub> / 50 Hz	6.8 V	0 V

### 9.16. Over-Temperature Protection Test (OTP)


#### Test Conditions

Measure the output voltage and the MOSFET gate voltage when the IC temperature increases above 140°C.

#### Measured Waveforms

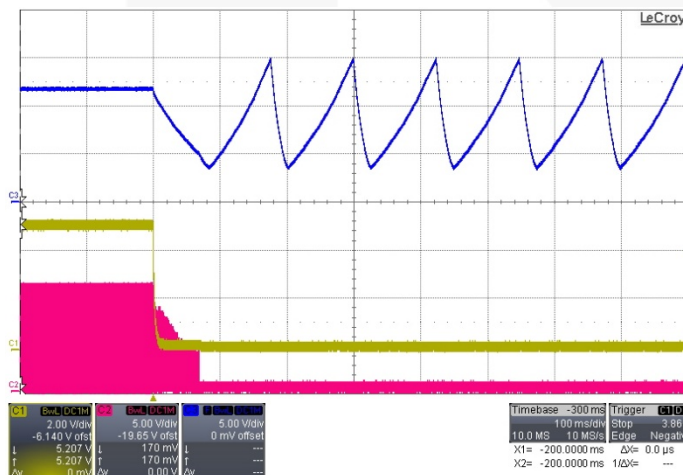

**Figure 35. 90 V<sub>AC</sub> / 60 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>], C3 [V<sub>DD</sub>] at Maximum Load**

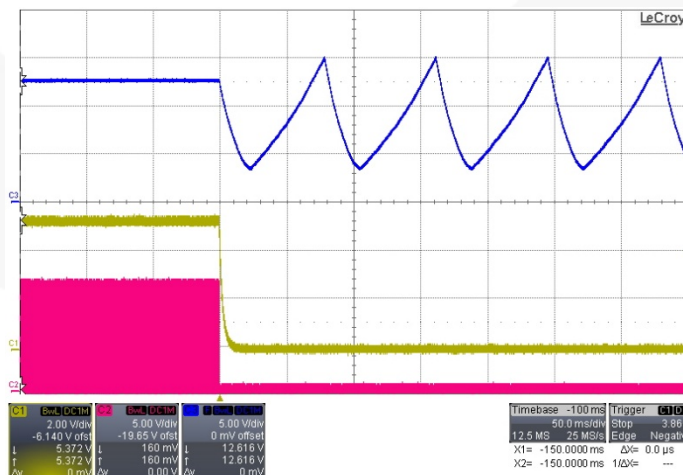

**Figure 36. 264 V<sub>AC</sub> / 50 Hz, C1 [V<sub>O</sub>], C2 [V<sub>GS</sub>], C3 [V<sub>DD</sub>] at Maximum Load**

## 9.17. Electromagnetic Interference (EMI) Tests

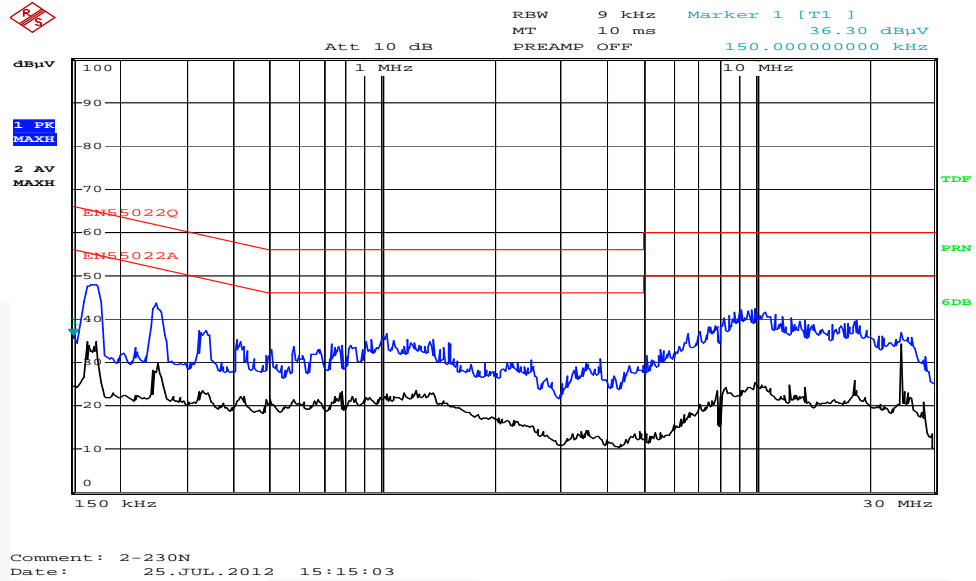


Figure 37. Line at 115 V<sub>AC</sub>



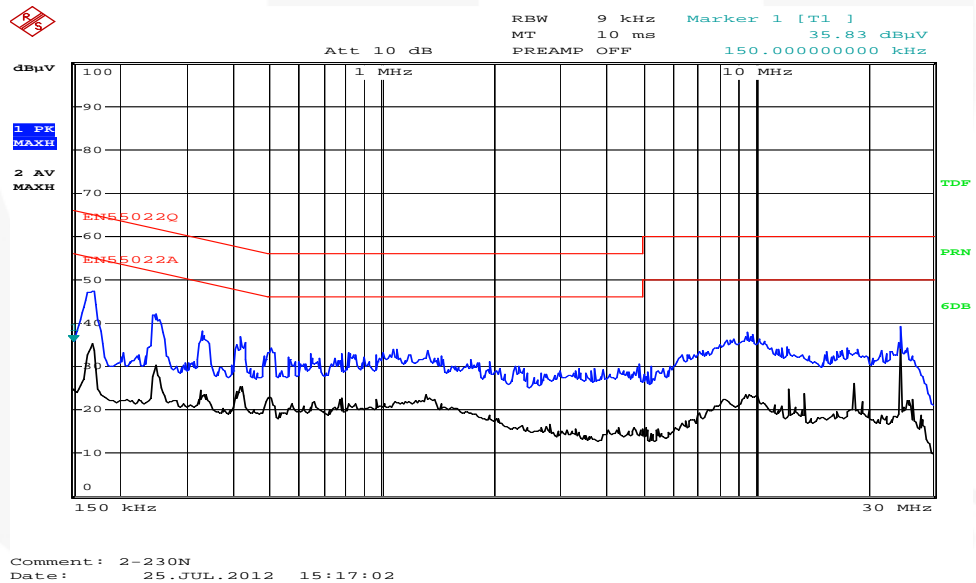


Figure 38. Neutral at 115 V<sub>AC</sub>

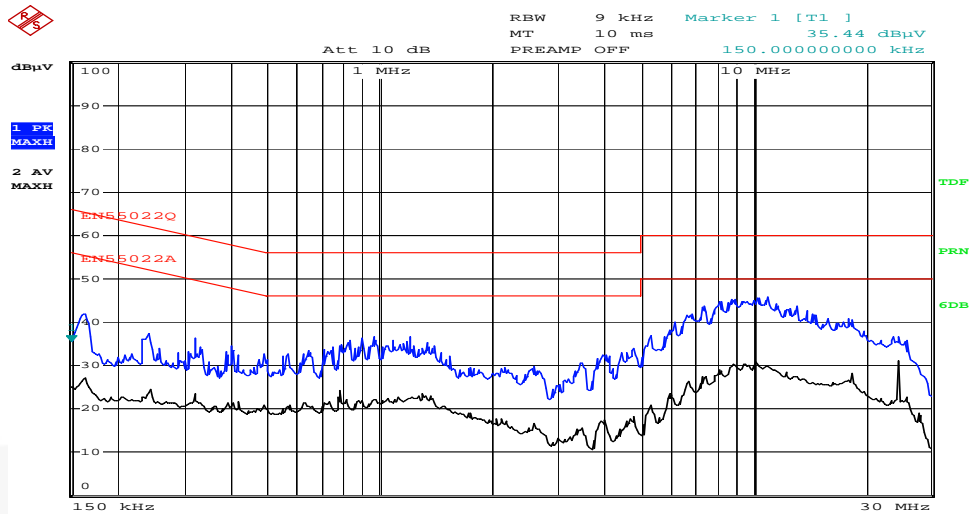

Comment: 2-230N  
Date: 25.JUL.2012 15:21:17

Figure 39. Line at 230 V<sub>AC</sub>

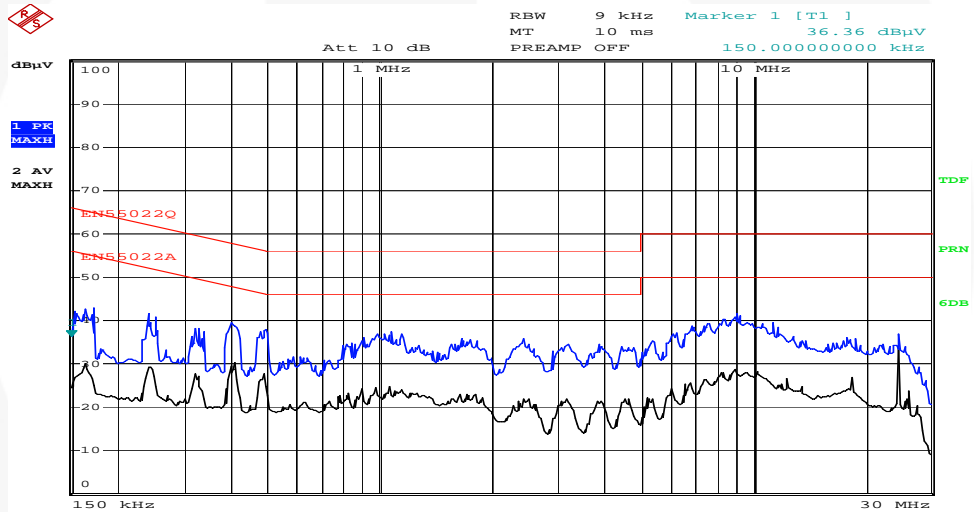

Comment: 2-230N  
Date: 25.JUL.2012 15:19:09

Figure 40. Neutral at 230 V<sub>AC</sub>

### 9.18. Surge Test

**Table 20. Test Results**

Mode	Polarity	Phase	Voltage	Condition
L-N	±	0°	2.2 kV	PASS
	±	90°		PASS
	±	180°		PASS
	±	270°		PASS
L-PE	±	0°	4.4 kV	PASS
	±	90°		PASS
	±	180°		PASS
	±	270°		PASS
N-PE	±	0°	4.4 kV	PASS
	±	90°		PASS
	±	180°		PASS
	±	270°		PASS

### 9.19. Electrostatic Discharge Capability (ESD) Test

**Table 21. Test Results**

Mode	Polarity	Voltage	Condition
Air	±	16.5 kV	PASS
Contact	±	8.8 kV	PASS

## 10. Revision History

Rev.	Date	Description
1.0.0	October 2012	Initial Release

---

### WARNING AND DISCLAIMER

Replace components on the Evaluation Board only with those parts shown on the parts list (or Bill of Materials) in the Users' Guide. Contact an authorized Fairchild representative with any questions.

This board is intended to be used by certified professionals, in a lab environment, following proper safety procedures. Use at your own risk. The Evaluation board (or kit) is for demonstration purposes only and neither the Board nor this User's Guide constitute a sales contract or create any kind of warranty, whether express or implied, as to the applications or products involved. Fairchild warrants that its products meet Fairchild's published specifications, but does not guarantee that its products work in any specific application. Fairchild reserves the right to make changes without notice to any products described herein to improve reliability, function, or design. Either the applicable sales contract signed by Fairchild and Buyer or, if no contract exists, Fairchild's standard Terms and Conditions on the back of Fairchild invoices, govern the terms of sale of the products described herein.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

---

### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

---

### EXPORT COMPLIANCE STATEMENT

These commodities, technology, or software were exported from the United States in accordance with the Export Administration Regulations for the ultimate destination listed on the commercial invoice. Diversion contrary to U.S. law is prohibited.

U.S. origin products and products made with U.S. origin technology are subject to U.S. Re-export laws. In the event of re-export, the user will be responsible to ensure the appropriate U.S. export regulations are followed.