

**SANYO**

No.1194C

**TV Tuner Controller**

The LA7911 is a tuner controller IC having such functions as band switch, inverter, low-pass filter, 33V reference Zener. It can be used for frequency synthesizer or voltage synthesizer according to external application.

#### Functions

- Band switch (Equivalent to LA7900, LA7910 : Refer to the truth table.)
- Inverter
- Low-pass filter (Voltage follower, operational amplifier)
- 33V reference Zener

#### Features

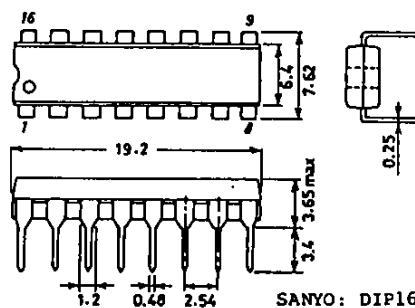
- 2-input 5-output band switch.
- Band switches of 2 types (LA7900 type or LA7910 type) available by changing over C pin.
- Large maximum output current and small saturation voltage.
- Meets CATV tuner requirements.
- Usable for frequency synthesizer or voltage synthesizer by changing connection of inverter and operational amplifier.

#### Band Switch Truth Table

Input			Output				
(Pin3) A	(Pin2) B	(Pin4) C	F1(Pin15)	F2(Pin14)	F3(Pin13)	F4(Pin12)	SW(Pin11)
L	L	Open	H	Z	Z	Z	Z
H	L	Open	Z	H	Z	Z	L
L	H	Open	Z	Z	H	Z	L
H	H	Open	Z	Z	Z	H	L
L	L	GND	H	Z	Z	H	Z
H	L	GND	Z	H	Z	H	L
L	H	GND	Z	Z	H	Z	L
H	H	GND	Z	Z	H	H	L

Z : High impedance

#### Package Dimensions

(unit : mm)  
3006B

SANYO: DIP16

**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**  
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

9148YT / 8215KI / 3164KI, TS №1194-1/3

Maximum Ratings at  $T_a=25^\circ C$ 

## 1. Band Switch

			unit
V <sub>CC1</sub>	Maximum Supply Voltage	V <sub>16</sub> max	18 V
V <sub>CC2</sub>	Maximum Supply Current	I <sub>1</sub> max	10 mA
Maximum Load Current	I <sub>12</sub> , I <sub>13</sub> max	I <sub>1</sub> =6mA	-60 mA
	I <sub>14</sub> , I <sub>15</sub> max	V <sub>CC1</sub> =12V	
Maximum Load Current	I <sub>11</sub> max		25 mA
Maximum AB Input Current	I <sub>2</sub> , I <sub>3</sub> max		2 mA
Maximum Applied Voltage (SW)	V <sub>11</sub> max		35 V
Maximum Applied Voltage	V <sub>12</sub> , V <sub>14</sub> max		-18 V

## 2. Inverter, Operational Amplifier

V <sub>CC3</sub>	Maximum Supply Current	I <sub>6</sub> max	8 mA
Maximum Applied Voltage	V <sub>8</sub> max		35 V
Maximum Load Current	I <sub>8</sub> max		5 mA
Maximum Input Voltage	V <sub>7</sub> max		8 V
Maximum Input Current	I <sub>7</sub> max		1 mA
Maximum Input Voltage	V <sub>9</sub> max		V <sub>CC</sub> -1 V

## 3. Common to 1.2

Allowable Power Dissipation	P <sub>dmax</sub>	$T_a=65^\circ C$	600 mW
Operating Temperature	T <sub>opr</sub>		-20 to +65 °C
Storage Temperature	T <sub>stg</sub>		-55 to +125 °C

Operating Characteristics at  $T_a=25^\circ C$ 

## 1. Band Switch

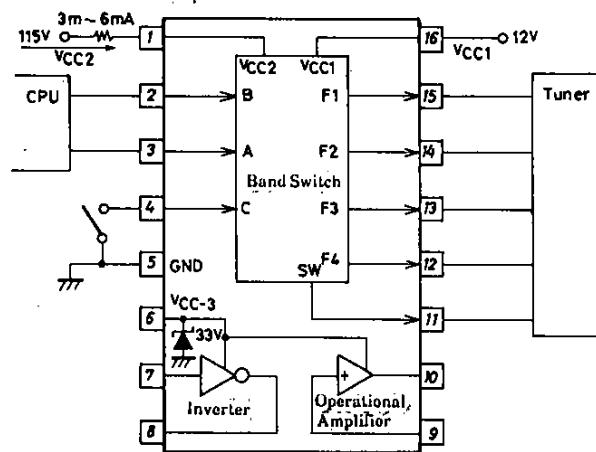
			min	typ	max	unit
Quiescent Current	I <sub>CC</sub>		0	9	mA	
Output Saturation Voltage	F(sat)		0	0.7	V	
Output Saturation Voltage	SW(sat)		0	0.7	V	
Input Threshold Voltage	V <sub>TH</sub>		0.8	1.5	3	V
Output Leak Current	I <sub>L</sub>		0	-50	μA	

## 2. Inverter, Operational Amplifier, Reference Zener

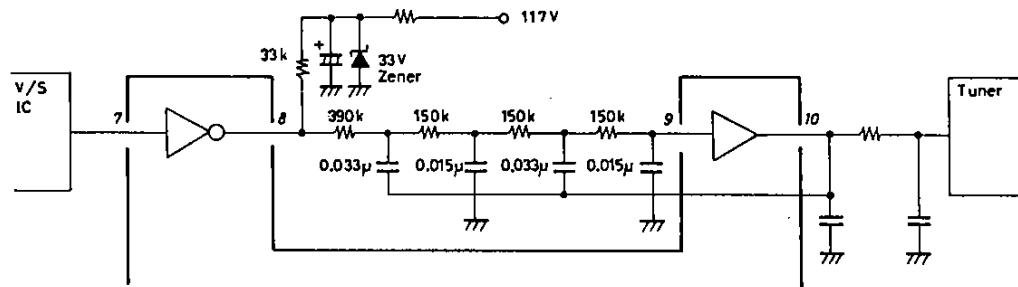
Zener Voltage	V <sub>Z</sub>	31	33	35	V	
Output Saturation Voltage	V <sub>8(sat)</sub>	0	0.3	V		
Input Threshold Voltage	V <sub>TH</sub>	2.5	4.5	V		
Input Offset Voltage (1)	V <sub>10-1</sub>	-100	+100	mV		
Input Offset Voltage (2)	V <sub>10-2</sub>	-100	+100	mV		
Input Bias Current	I <sub>BIAS</sub>			-190	nA	

(Note) Current flowing into IC : Plus (no sign)  
Current flowing out of IC : Minus

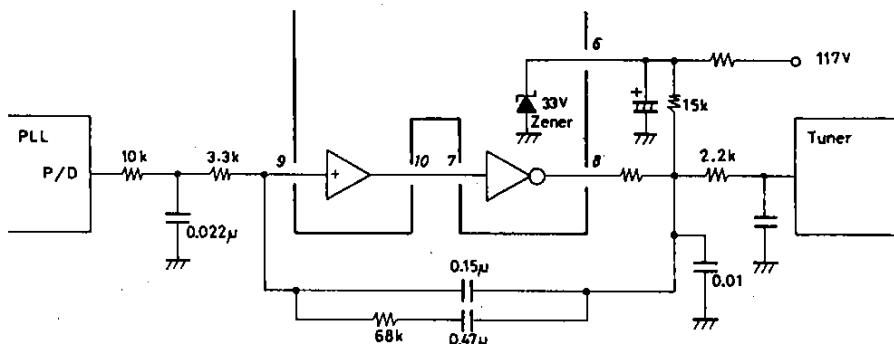
## Equivalent Circuit Block Diagram



## Sample Application Circuit

1. Voltage Synthesizer ( $f=500\text{Hz}$ )

Unit ( resistance:Ω, capacitance:F )

2. Frequency Synthesizer ( $f_r=1\text{kHz}$ )

Unit ( resistance:Ω, capacitance:F )

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of June, 1996. Specifications and information herein are subject to change without notice.