GL6850

TWO TONE RINGER

Description


The GL6850 tone ringer is a monolithic device, which incorporates two oscillators, and output amplifier and a power supply control circuit. The oscillator frequencies can be adjusted over a wide range by selection of external components. One oscillator, normally operated at a low frequency, causes the second oscillator to alternate between its nominal frequency and a related higher frequency. The resulting output is a distinct warbling tone. The output amplifier will drive either a transformer coupled loudspeaker or a piezo-ceramic transducer.

The device can be powered from a telephone line or a fixed d.c. supply. The power control circuit has built-in hysteresis to prevent false triggering and rotary dial chirps. The GL6850 can be triggered externally under logic control.


Features

- Low current consumption.
- Designed for telephone bell replacement.
- Small size MINIDIP package.
- Adjustable 2- frequency tone.
- Built-in hysteresis prevents false triggering and rotary dial CHIRPS.
- Alarms or other alerting devices.
- External triggering or ringer disable.
- Include ESD protection.

Block Diagram

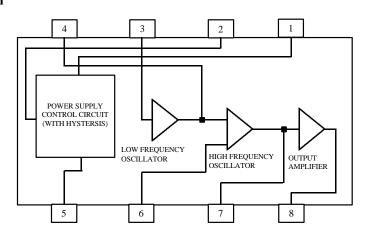

Pin Configuration



Absolute Maximum Ratings (Ta = 25; É

| CHARACTERISTICS | SYMBOL | VALUE | UNIT |
|-----------------------|----------|------------|------|
| | | | |
| Supply Voltage | V_{CC} | 30 | V |
| Power Dissipation | Po | 400 | mW |
| Operating Temperature | Topr | -25 to 65 | ; É |
| Storage Temperature | Tstg | -65 to 150 | į É |
| | | | |

Electrical Characteristics (Ta = 25; É

| SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|
| V_{CC} | | ı | ı | 29.0 | V |
| V_{SI} | | 17 | 19 | 21 | V |
| I_{SI} | | 0.9 | 2.0 | 3.7 | mA |
| V_{SUS} | | 9.7 | 11.0 | 12.0 | V |
| I_{SUS} | | 0.4 | 1.0 | 2.0 | mA |
| V_{TR} | $V_{CC} = 15 \text{ V}$ | 9.5 | - | - | V |
| I_{TR} | $V_{CC} = 15 \text{ V}$ | 40 | - | 1000^{5} | μA |
| V_{DIS} | $V_{CC} = 21 \text{ V}$ | 1 | - | 0.8 | V |
| I_{DIS} | $V_{CC} = 21 \text{ V}$ | -50 | - | - | μA |
| V _{OH} | V _{CC} =21V, I ₈ =-10mA Pin6=6V,Pin7=GND | 17 | 19 | 21 | V |
| V _{OL} | V _{CC} =21V, I ₈ = -10mA Pin6= GND,Pin7=6V | 1 | 1 | 2 | V |
| f_{H1} | | | | | |
| f_{H2} f_{L} | R3=191K, C3=6800Pf R3=191K, C3=6800pF R2=165K, C2=0.47µF | 461 576 9.0 | 461 640 10 | 563 704 11.0 | Hz Hz Hz |
| | $\begin{array}{c} V_{CC} \\ V_{SI} \\ I_{SI} \\ V_{SUS} \\ I_{SUS} \\ V_{TR} \\ I_{IR} \\ V_{DIS} \\ I_{DIS} \\ V_{OH} \\ \end{array}$ | $\begin{array}{c c} V_{CC} \\ V_{SI} \\ \hline \\ I_{SI} \\ \hline \\ V_{SUS} \\ \hline \\ I_{SUS} \\ \hline \\ V_{TR} \\ \hline \\ V_{CC} = 15 \text{ V} \\ \hline \\ V_{DIS} \\ \hline \\ V_{CC} = 21 \text{ V} \\ \hline \\ I_{DIS} \\ \hline \\ V_{CC} = 21 \text{ V} \\ \hline \\ V_{OH} \\ \hline \\ V_{OH} \\ \hline \\ V_{CC} = 21V, I_8 - 10\text{mA} \\ Pin6 = 6V, Pin7 = GND \\ \hline \\ V_{OL} \\ \hline \\ V_{CC} = 21V, I_8 - 10\text{mA} \\ Pin6 = GND, Pin7 = 6V \\ \hline \\ f_{H1} \\ \hline \\ f_{H2} \\ \hline \\ R3 = 191K, C3 = 6800\text{pf} \\ $ | $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ | $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ | $\begin{array}{c ccccccccccccccccccccccccccccccccccc$ |

NOTE

- Initial supply voltage (V_{SI}) is the supply voltage required to start the tone ringer oscillation.
- Sustaining voltage (V_{SUS}) in the supply voltage required to maintain oscillation.
- 3. V_{TR} and I_{TR} are the conditions applied to trigger to start for V_{SUS} , $\hat{\mathbf{X}}_{CC}$, $\hat{\mathbf{X}}_{SI}$ 4. V_{DIS} and I_{DIS} are the conditions applied to trigger to inhibit oscillation for V_{SI} , $\hat{\mathbf{A}}V_{CC}$
- 5. Trigger current must be limited to this value externally.

PIN DESCRIPTION

| PIN NUMBER | PIN FUNCTION | DESCRIPTION |
|------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PIN 1 | VCC | Operating supply D.C. voltage rectified from ringing signal. |
| PIN2 | TRIG_IN | Oscillator External Trigger/Inhibit pin (must beconnected through a current limiting resistor, which is used to program the slope of supply current vs voltage.) |
| PIN3 | LOWOSC_1 | Low Frequency Time Constant Adjustment pins f _L is controlled |
| PIN 4 | LOWOSC_2 | externally by R_2 and C_2 $f_L = 1/1.289 R_2 C_2$ |
| PIN 5 | GND | Ground |
| PIN 6 | HIGHOSC_1 | High Frequency Time Constant Adjustment Pins f _{H1} and f _{H2} are |
| PIN 7 | HIGHOSC_2 | controlled externally by R_3 and C_3 . $f_{H1} = 1/1.504 R_3 C_3, f_{H2} = 1/1.203 R_3 C_3$ |
| PIN 8 | OUTPUT | Tone output |

APPLICATON CIRCUIT

