



LA3335M

**PLL FM Multiplex Demodulator
for 3 V Headphone Stereos and
Radio-cassette Recorders**

Overview

The LA3335M is PLL FM stereo multiplex demodulator IC designed for use in headphone stereos, etc. which operate from a low supply voltage.

Applications

- FM Multiplex IC for 3 V headphones, radio-cassette recorders

Functions

- PLL FM stereo decoder, VCO stop, stereo indicator


Features

- Wide operating voltage range : 1.8 to 6 V
- Low current dissipation : 1.6 mA
- Minimum number of external parts required

Package Dimensions

unit : mm

3086A-MFP10S

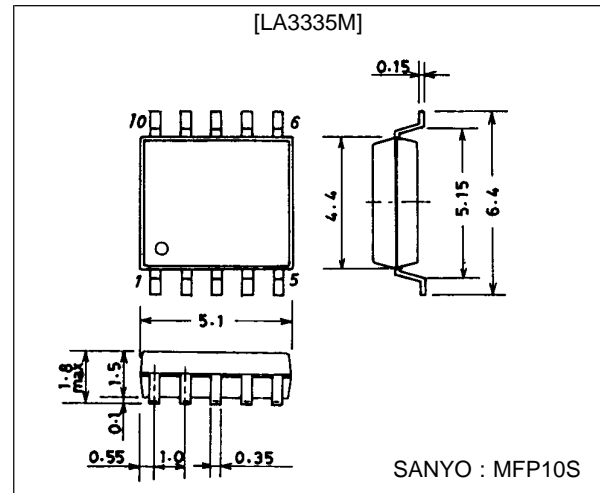

Specifications

Maximum Ratings at Ta = 25 °C

| Parameter | Symbol | Conditions | Ratings | Unit |
|-----------------------------|---------------------|------------|-------------|------|
| Maximum supply voltage | V _{CC} max | | 8 | V |
| Lamp drive current | I _L max | | 10 | mA |
| Allowable power dissipation | Pd max | Ta ≤ 70 °C | 50 | mW |
| Operating temperature | Topr | | -20 to +70 | °C |
| Storage temperature | Tstg | | -40 to +125 | °C |

Operating Conditions at Ta = 25 °C

| Parameter | Symbol | Conditions | Ratings | Unit |
|----------------------------|--------------------|------------|----------|------|
| Recommended supply voltage | V _{CC} | | 3 | V |
| Operating voltage range | V _{CC} op | | 1.8 to 6 | V |
| Input signal voltage | V _{IN} | | 150 | mV |


SANYO Electric Co.,Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

LA3335M

Operating Characteristics at $T_a = 25\text{ }^\circ\text{C}$, $V_{CC} = 3\text{ V}$, input 150 mV , $L + R = 90\%$, pilot = 10% , $f = 1\text{ kHz}$, See specified Test Circuit.

| Parameter | Symbol | Conditions | min | typ | max | Unit |
|---------------------------|---------------------|--------------------|-----|---------|-----|------------|
| Quiescent current | I_{CCO} | No input | | 1.6 | 2.5 | mA |
| Input resistance | R_i | | 35 | 50 | 65 | k Ω |
| Output resistance | R_o | | 5.3 | 7.5 | 9.7 | k Ω |
| Channel separation | CHsep | | 30 | 45 | | dB |
| Total harmonic distortion | THD | Monaural | | 0.6 | 1.5 | % |
| | | Stereo main | | 0.3 | 1.5 | % |
| Output voltage | V_O | Monaural | 90 | 130 | 180 | mV |
| Channel balance | CB | Monaural | | 0 | 1.5 | dB |
| Lamp lighting level | V_L | Pilot | 1.5 | 3.5 | 6 | mV |
| Lamp hysteresis | hy | | | 3.5 | | dB |
| Capture range | CR | Pilot 15 mV | | ± 3 | | % |
| Allowable input level | $V_{IN\text{ max}}$ | Monaural, THD = 5% | | 350 | | mV |
| Signal to noise ratio | S/N | Monaural | | 82 | | dB |

Equivalent Circuit Block Diagram and Test Circuit

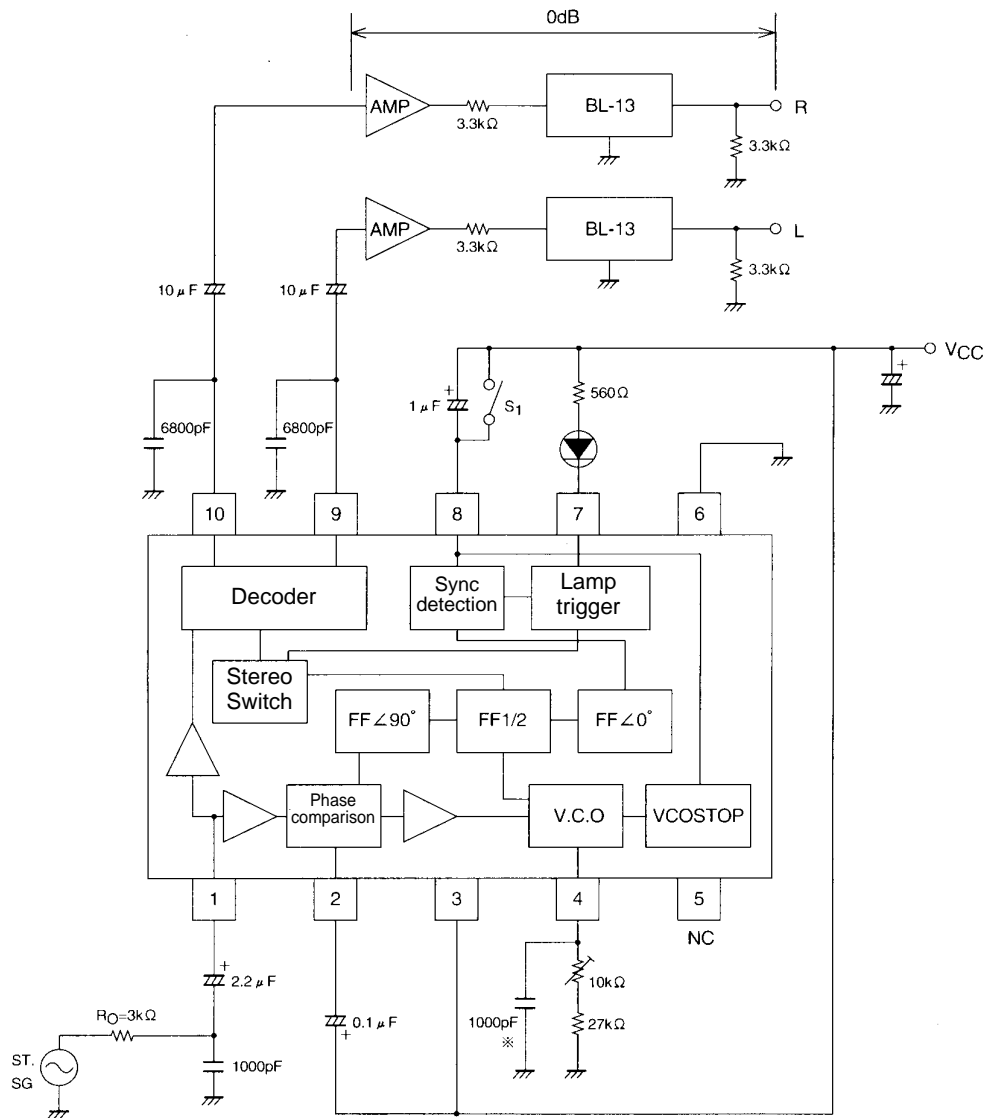

S1: VCO STOP when ON

AMP: Bandwidth of 100 kHz or more, THD = 0.01% or less, input impedance of 330 k Ω or more

* Styrol capacitor


A06081

LA3335M

External Parts

| Part Name | Symbol | Kind | Value | Remarks |
|--------------------|--------|------------------------|---------|----------------------------|
| Resistor | R1 | Carbon resistor | 27 kΩ | VCO time constant |
| | R2 | Carbon resistor | 560 Ω | Limiting resistor |
| Semifixed resistor | VR1 | Carbon resistor | 10 kΩ | VCO OSC frequency adjust |
| Capacitor | C1 | Electrolytic capacitor | 2.2 μF | DC blocking |
| | C2 | Electrolytic capacitor | 0.1 μF | Loop filter |
| | C3 | Polystyrol capacitor | 1000 pF | VCO time constant |
| | C4 | Electrolytic capacitor | 1 μF | Pilot detection |
| | C5 | Ceramic capacitor | 6800 pF | De-emphasis |
| | C6 | Ceramic capacitor | 6800 pF | De-emphasis |
| | C7 | Electrolytic capacitor | | Power supply ripple filter |

Typical Voltage and Name of Each Pin

| Pin No. | Voltage | Name | Remarks |
|---------|----------------|-----------------------------|---|
| 1 | 1.2 V | Input | |
| 2 | $V_{CC}-0.7 V$ | PLL loop filter | |
| 3 | V_{CC} | Power supply | |
| 4 | — | VCO |  $V_{CC}-0.2 V$ $0.65 V_{CC}$ |
| 5 | — | NC | |
| 6 | 0 V | GND | |
| 7 | — | Stereo indicator | Open collector |
| 8 | $V_{CC}-0.7 V$ | Pilot sync detection filter | |
| 9 | 1.3 V | Decoder output (low) | |
| 10 | 1.3 V | Decoder output (high) | |

Proper cares in using IC

1. VCO stop method
Short pin 7 and pin 3 (V_{CC} pin) to stop the VCO.
(Note) The maximum voltage to be applied to pin 7 must not exceed the voltage on pin 3.
2. Free-running frequency check method : Use either of the following two methods.
 - a) Connect pin 4 to a frequency counter through the high input impedance amplifier.




Figure 1

LA3335M

- b) Connect the connection point of the semifixed resistor connected to pin 4 and the fixed resistor to a frequency counter through the R_X of 240 k Ω . Fig. 2 shows how the error changes as the R_X value is decreased.

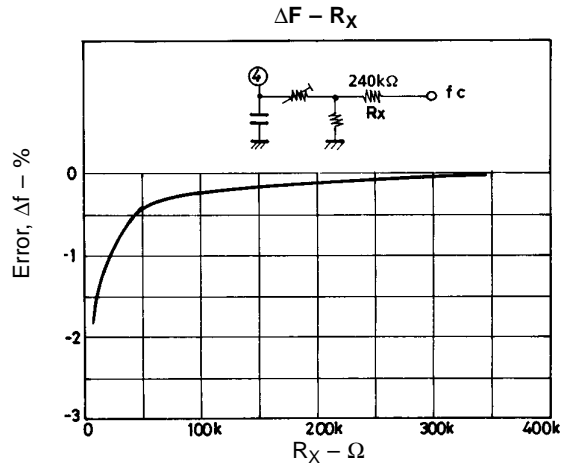


Figure 2

3. Separation setting method

The LA3335M is so designed that the sub-signal gain is approximately 1.25 times as high as the main signal gain. The separation can be set by attenuating the sub-signal of the FM detection output. (See Figure 3)




Figure 3

The value of capacitor C_o depends on the attenuation of the sub-signal of the FM detection output and the IF IC output impedance R_o . Fig. 4 shows the value of separation setting capacitor C_o when R_o is set to 3 k Ω .

For example, when the attenuation of sub-signal of the IF IC output is 0.9 time that of the main signal, it is seen from Figure 4 that the value of C_o is approximately 500 pF.











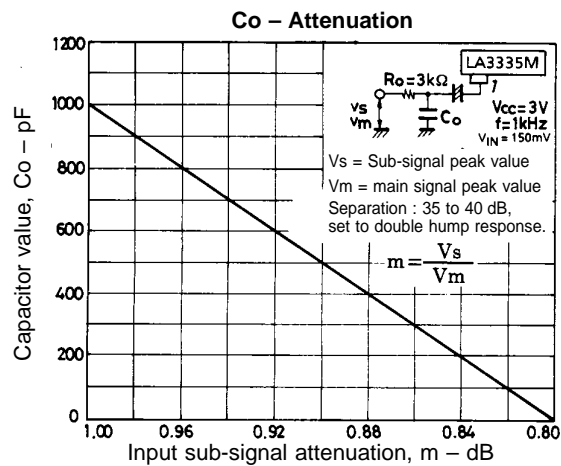


Figure 4

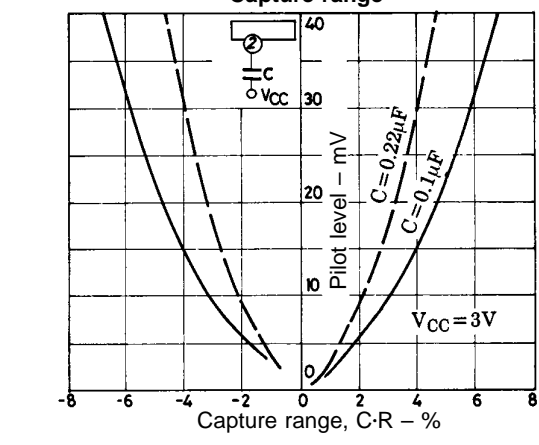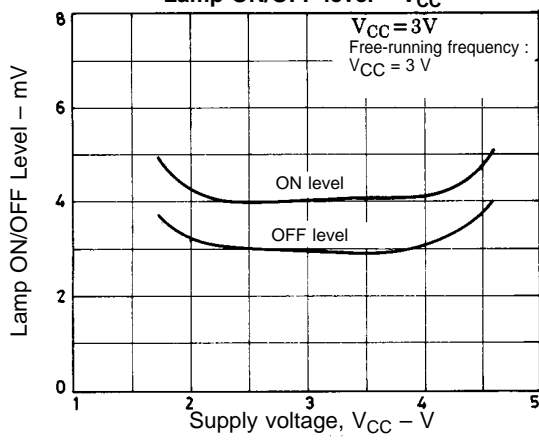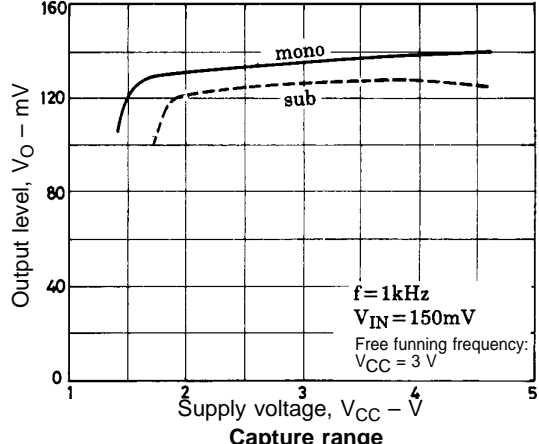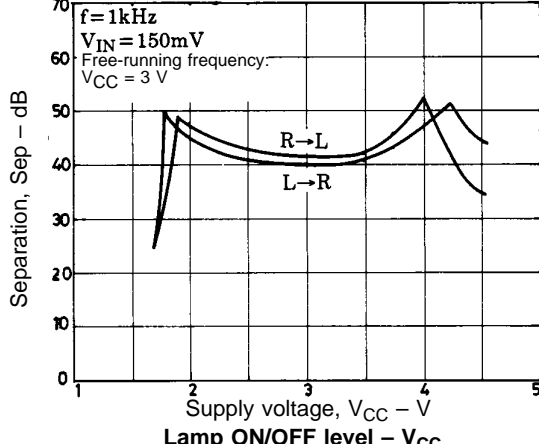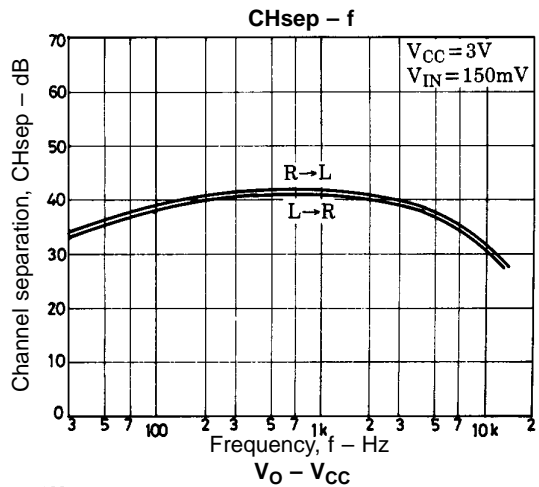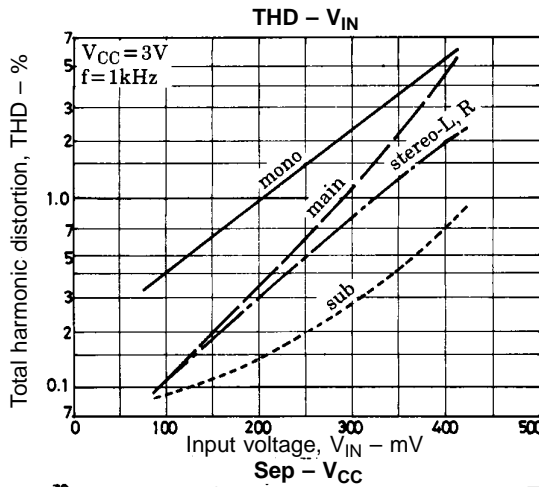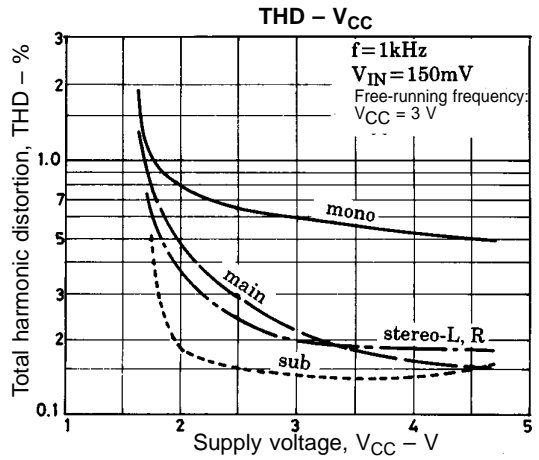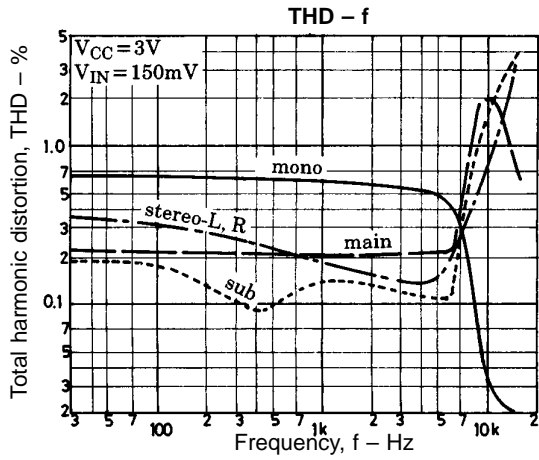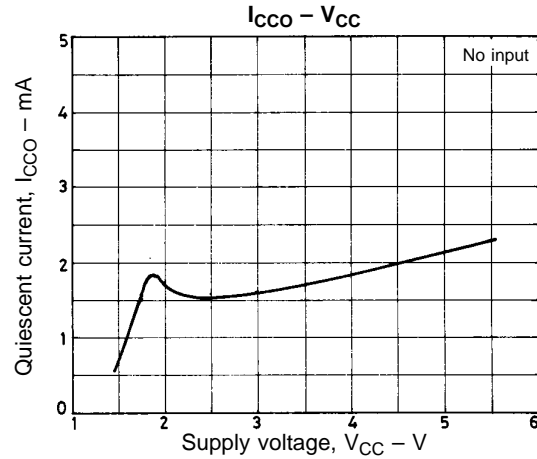

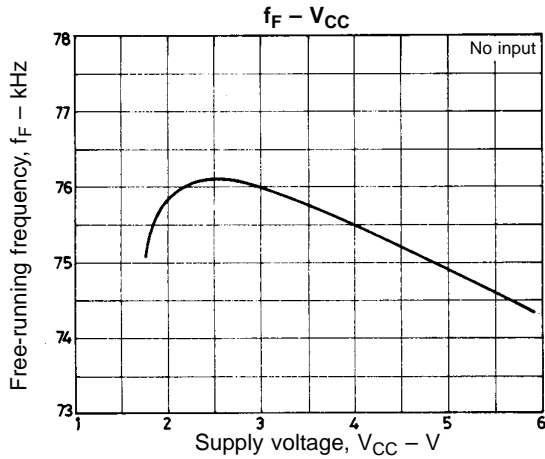

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 1996. Specifications and information herein are subject to change without notice.