# Low frequency transistor 2SA2018/2SA2030/2SA2119K

The transistor of 500mA class which went only into 2125 size conventionally was attained in 1608 sizes or 1208 sizes.

## Applications


For switching, for muting.

## Features

- 1) A collector current is large.
- 2) Collector saturation voltage is low.

 $V_{CE(sat)} \le 250 \text{mA}$ 

At Ic = 200mA / IB = 10mA

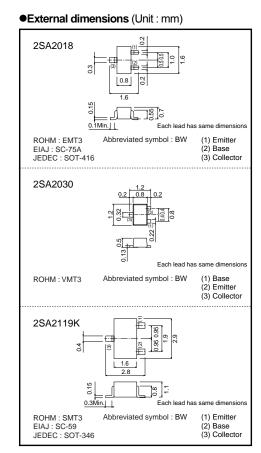

#### Absolute maximum ratings (Ta=25°C)

Parameter	Sy	mbol	Limits	Unit			
Collector-base voltage	\ \	/ <sub>СВО</sub>	15	V			
Collector-emitter voltage	VCEO		12	V			
Collector current		lc	500	mA			
	ICP		1	A *			
Collector power dissipation	Pc	VMT3 EMT3	150	mW			
		SMT3	300				
Junction temperature	Tj		150	°C			
Storage temperature	Tstg		-55 to +150	°C			
*Single pulse Pw-1mc							

Single pulse, Pw=1ms

# •Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	
Collector-base breakdown voltage	ВVсво	15	-	-	V	Ic=10μA	
Collector-emitter breakdown voltage	BVCEO	12	-	-	V	Ic=1mA	
Emitter-base breakdown voltage	ВУево	6	-	-	V	Ιε=10μΑ	
Collector cutoff current	Ісво	-	-	100	nA	V <sub>CB</sub> =15V	
DC current transfer ratio	h <sub>FE</sub>	270	-	680	-	V <sub>CE</sub> =2V / I <sub>C</sub> =10mA	
Collector-emitter saturation voltage	VCE (sat)	-	100	250	mV	Ic=200mA / IB=10mA	
Transition frequency	f⊤	-	260	-	MHz	V <sub>CE</sub> =2V, I <sub>E</sub> =10mA, f <sub>T</sub> =100MHz	
Output capacitance	Cob	-	6.5	-	pF	V <sub>CB</sub> =10V, I <sub>E</sub> =0A, f=1MHz	

Rev.A 1/2

# 2SA2018 / 2SA2030 / 2SA2119K

1000

## Transistors

### Packaging specifications and hre

		Package name			
Туре		Code	T146	TL	T2L
	h <sub>FE</sub>	Basic ordering unit (pieces)	3000	3000	8000
2SA2119K			0	-	-
2SA2018			-	0	-
2SA2030			-	I	0

1000

#### Electrical characteristic curves




Fig.1 Grounded Emitter Propagation Characteristics







Fig.4 Collector-Emitter Saturation Voltage vs. Collector Current (II)





Emitter Input Capacitance vs. Emitter-Base Voltage



Collector Current





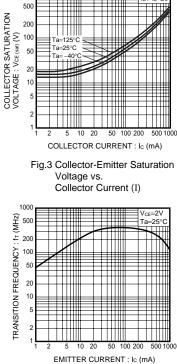

/ In=2

Fig.6 Gain Bandwidth Product vs. Emitter Current

ROHM

## Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
  product described in this document are for reference only. Upon actual use, therefore, please request
  that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
   Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

rohm