# Power transistor (-30V, -2A) 2SA2087

#### Features

- 1) High speed switching. (Tf : Typ. : 20ns at Ic = -2A)
- 2) Low saturation voltage, typically
- (Typ.: -200mV at Ic = -1.0A, I<sub>B</sub> = -100mA)
- Strong discharge power for inductive load and capacitance load.
- 4) Complements the 2SC5875

#### Applications

Low frequency amplifier High speed switching

#### Structure

PNP Silicon epitaxial planar transistor

#### Packaging specifications

	Package	Taping	
Туре	Code	TV2	
	Basic ordering unit (pieces)	2500	
2SA2087		0	


#### •Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit	
Collector-base voltage		Vсво	-30	V	
Collector-emitter voltage		Vceo	-30	V	
Emitter-base voltage		Vebo	-6	V	
Collector current	DC	lc	-2	А	
	Pulsed	Іср	-4	A *1	
Power dissipation		Pc	1.0	W *2	
Junction temperature		Tj	150	°C	
Range of storage temperature		Tstg	-55 to 150	°C	

\*1 Pw=10ms

\*2 Each terminal mounted on a recommended land

## •External dimensions (Unit : mm)



## Transistors

#### •Electrical characteristics (Ta=25°C)


Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Collector-emitter breakdown voltage	BVCEO	-30	-	-	V	lc=-1mA
Collector-base breakdown voltage	ВУсво	-30	-	-	V	Ic=-100μA
Emitter-base breakdown voltage	ВVево	-6	-	-	V	Iε= -100μA
Collector cut-off current	Ісво	-	-	-1.0	μA	Vcb=-20V
Emitter cut-off current	Іево	-	-	-1.0	μA	Veb=-4V
Collector-emitter saturation voltage	Vce (sat)	-	-200	-500	mV	Ic=-1.0A
						IB=-100mA
DC current gain	hfe	120	-	390	-	Vce=-2V
						Ic=-100mA
Transition frequency	fτ	-	350	-	MHz	Vce=-10V *
						IE=100mA
						f=10MHz
Corrector output capacitance	Cob	-	25	_	pF	Vcb=-10V
						IE=0mA
						f=1MHz
Turn-on time	Ton	-	25	-	ns Ic= -2A IB1= -200mA IB2=200mA	
Storage time	Tstg	-	100	-		
Fall time	Tf	-	20	-	ns	Vcc≒–25V

\*Non repetitive pulse


#### **•**hfe RANK

Q	R	
120–270	180–390	

#### •Electrical characteristic curves











Fig.2 Switching Time








Fig.3 DC Current Gain vs. Collector Current (I)




ROHM


# 2SA2087

# Transistors

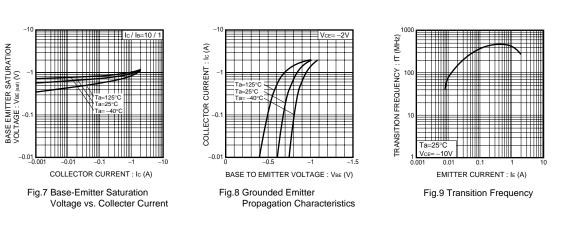



#### Switching characteristics measurement circuits

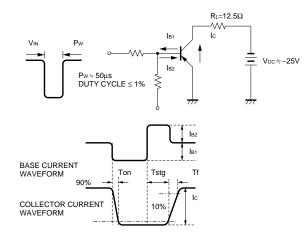

ROHM

#### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
  product described in this document are for reference only. Upon actual use, therefore, please request
  that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
   Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

rohm