


Data Sheet

Chip Monolithic Ceramic Capacitors for Automotive Medium Voltage for Automotive Soft Termination Type GCJ Series

GCJ31BR72J332KXJ1L (1206, X7R, 3300pF, DC630V)

RoHS regulation conformity parts

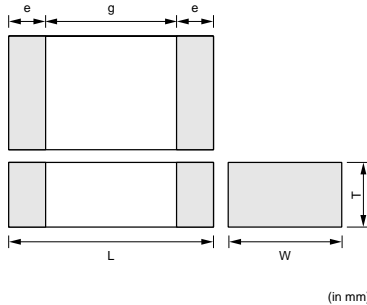

■ Dimensions

Length L	3.2mm±0.2mm
Width W	1.6mm±0.2mm
Thickness T	1.25mm+0/-0.3mm
Electrode e	0.3mm min.
Electrode g (min.)	1.2mm

■ Rated Value

	Murata PN Code	Spec
Temperature Char.	R7	X7R (EIA), ±15%
Capacitance	332	3300pF
Capacitance Tol.	K	±10%
Rated Voltage	2J	DC630V

■ Packaging

Code	Packaging	Minimum Quantity
L	180mm Embossed Tape	3000

■ Specifications

Please refer to 'Medium Voltage for Automotive Soft Termination Type GCJ Series Specifications and Test Methods' PDF file.

- This data sheet is applied for CHIP MONOLITHIC CERAMIC CAPACITOR which has conductive polymer layer in the outer electrode used for Automotive (For Power-train, safety equipments) in accordance with AEC-Q200 requirements for your design.

<Notice>

- Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.
- Please refer to 'Caution' and 'Notice' for the other details.

- The RoHS compliance means that we judge from EU Directive 2002/95/EC the products do not contain lead, cadmium, mercury, hexavalent chromium, PBB and PBDE, except exemptions stated in EU Directive 2002/95/EC annex and impurities existing in natural world.
- This statement does not insure the compliance of any of the listed parts with any laws or legal imperatives developed by any EU members individually with regards to the RoHS Directive.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.