


Fail-Safe Floating Electrode MLCC / FE-CAP / X7R Dielectric


Outline Drawing

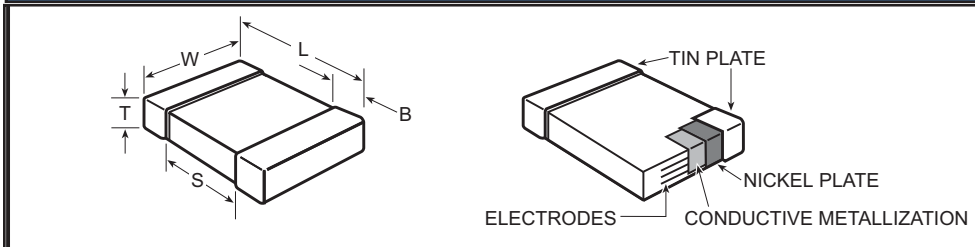

Product Description

The FE-CAP is a SMD MLCC which utilizes a floating internal electrode design, wherein the electrodes are configured to form multiple capacitors in series within a single MLCC package. This not only yields improved voltage and ESD performance over standard designs, but also mitigates the risk of low-IR or short-circuit failures that can occur due to board flex. Combined with the stability of an X7R dielectric, the FE-CAP complements KEMET's Open Mode Devices by providing a fail-safe design optimized for low- to mid-range capacitance values.

FE-CAP Internal Design

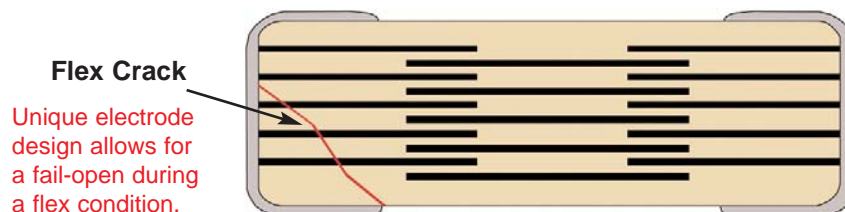

Dimensions – Millimeters (Inches)


EIA Size Code	Metric Size Code	L Length	W Width	B Bandwidth	S Separation
0402	1005	1.0 (.04) ± 0.05 (.002)	0.5 (.02) ± 0.05 (.002)	0.20 (.008) -0.40 (.016)	0.30 (.012)
0603	1608	1.6 (.063) ± 0.15 (.006)	0.8 (.032) ± 0.15 (.006)	0.35 (.014) ± 0.15 (.006)	0.70 (.028)
0805	2012	2.0 (.079) ± 0.20 (.008)	1.25 (.049) ± 0.20 (.008)	0.05 (.02) ± 0.25 (.010)	0.75 (.030)
1206	3216	3.2 (.126) ± 0.20 (.008)	1.6 (.063) ± 0.20 (.008)	0.50 (.02) ± .25 (.010)	N/A
1210	3225	3.2 (.126) ± 0.20 (.008)	2.5 (.098) ± 0.20 (.008)	0.50 (.02) ± .25 (.010)	N/A
1812	4532	4.5 (.177) ± 0.30 (.012)	3.2 (.126) ± 0.30 (.012)	0.60 (.024) ± .35 (.014)	N/A

Refer to standard thickness dimensions and table located in the F3102 SMT catalog on pages 73, 74, and 77.

X7R Capacitance Range

CAP (pF)	CAP (nF)	CAP CODE	0402				0603				0805				1206				1210				1812															
			6.3	10	16	25	50	6.3	10	16	25	50	100	200	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	25	50	100	200	250			
150	0.15	151																																				
180	0.18	181																																				
220	0.22	221																																				
270	0.27	271																																				
330	0.33	331																																				
390	0.39	391																																				
470	0.47	471																																				
560	0.56	561																																				
680	0.68	681																																				
820	0.82	821																																				
1000	1.00	102																																				
1200	1.2	122																																				
1500	1.5	152																																				
1800	1.8	182																																				
2200	2.2	222																																				
2700	2.7	272																																				
3300	3.3	332																																				
3900	3.9	392																																				
4700	4.7	472																																				
5600	5.6	562																																				
6800	6.8	682																																				
8200	8.2	822																																				
10000	10	103																																				
12000	12	123																																				
15000	15	153																																				
18000	18	183																																				
22000	22	223																																				
27000	27	273																																				
33000	33	333																																				
39000	39	393																																				
47000	47	473																																				
56000	56	563																																				
68000	68	683																																				
82000	82	823																																				
100000	100	104																																				
120000	120	124																																				
150000	150	154																																				
180000	180	184																																				
220000	220	224																																				

Ordering Information

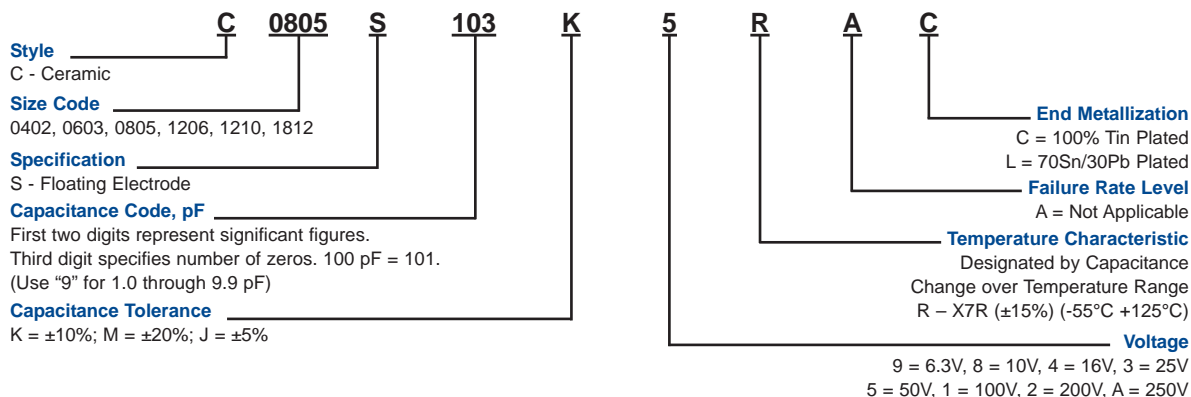

Electrical Parameters

As detailed in the KEMET Surface Mount Catalog F3102 for X7R, with following specific requirements based on room temperature (25°C) parameters:

- Operating Range: -55°C to +125°C, with no-bias capacitance shift limited to ± 15% over that range.
- Insulation Resistance (IR) measured after 2 minutes at rated voltage @ 25°C: Limit is 1,000 megohm microfarads or 100 gigohm, whichever is less.
- Capacitance and Dissipation Factor (DF) measured at 1kHz and 1 Vrms.

DF Limits are:

50 - 250 Volts	2.5%
16 - 25 Volts	3.5%
6.3 - 10 Volts	5.0%

Soldering Process

These components are suitable for reflow and wave soldering. All parts incorporate the standard KEMET barrier layer of pure nickel, with an overplate of pure tin to provide excellent solderability as well as resistance to leaching.

Marking

These chips will be supplied unmarked. If required, they can be laser-marked as an extra option. Details on the marking format are included in KEMET Surface Mount catalog F3102.

Qualification/Certification

AEC-Q200 Rev. C - Automotive
RoHS 6 - 100% tin termination

In general, the information in the KEMET Surface Mount catalog F3102 applies to these capacitors. The information in this bulletin supplements that in the catalog.

RoHS Compliant

