図面番号(DRAWING NO.) SJ109265

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.

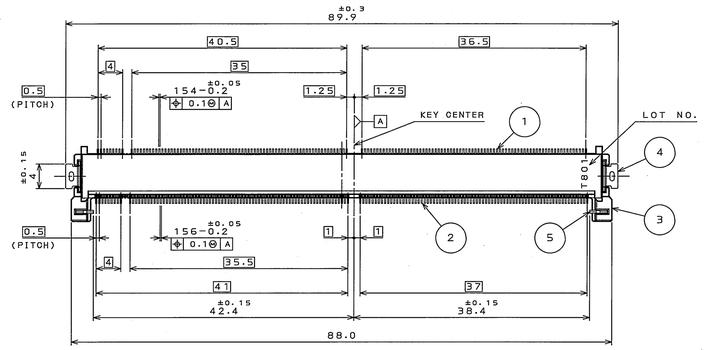

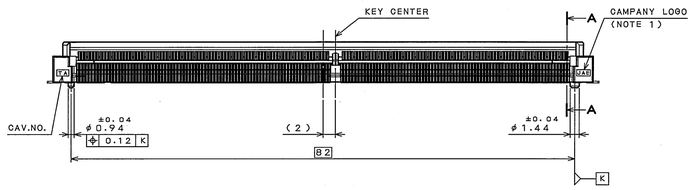



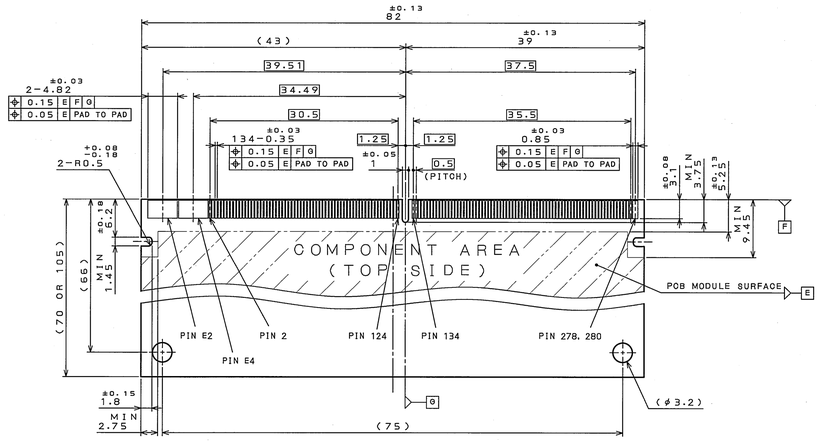



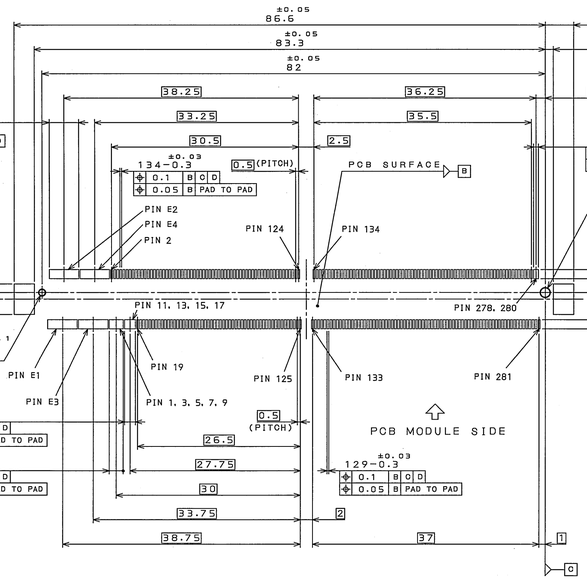

APPLICABLE P.C.B. DIMENSION(REF.)
適合基板寸法(参考)

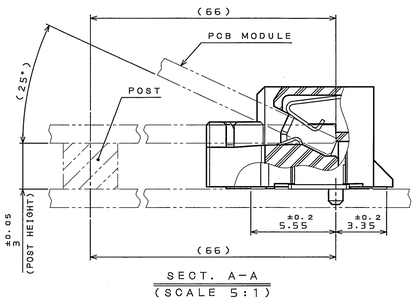

SECT. A-A
(SCALE 5:1)

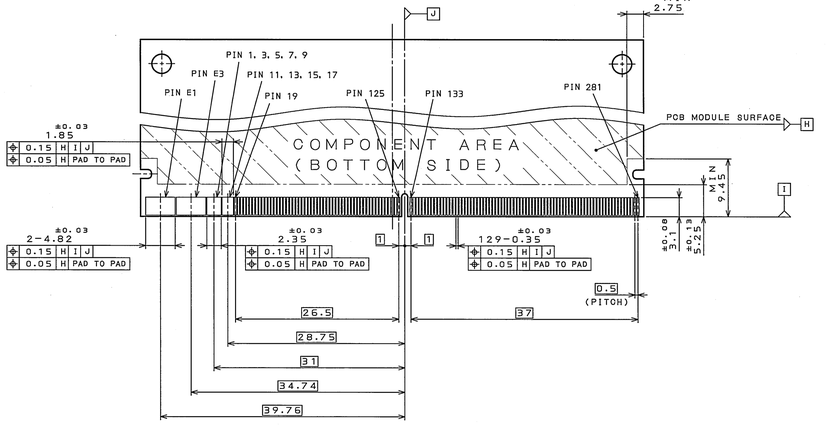

APPLICABLE P.C.B. MODULE DIMENSION(REF.)
適合モジュール基板寸法(参考)

MXM3.0(Rev1.0)



DETAIL B
(SCALE10:1)

NOTE1. PRODUCTION LOT NUMBER AS INDICATED.
2. COPLANALITY OF SMT TERMINAL IS 0.1 MAX.

注1.コンタクトのコプラナリティは0.1以下とする.
2.図示の面にロット番号を表示する.

(EX.) T801
- LOT NUMBER OF CURRENT MONTH
  当月の生産ロットを示す
- MONTH(RESPECTIVELY, OCT.:O, NOV.:X, DEC.:Y)
  月表示(10月:O,11月:X,12月:Y)
- YEAR(LAST DIGIT ONLY)
  年表示 (西暦末尾)
- PRODUCT CODE
  製造コード

DESIGNATION
命名法

MM70-314-310B1-*
- SERIES PREFIX
  シリーズ名
- BASIC NUMBER OF CONTACTS
  基本芯数
- NUMBER OF CONTACTS USED
  使用コンタクト数
- MODIFICATION CODE
- SOCKET TYPE
  ソケットタイプ
  B:ANGLED INSERTION TYPE
- CONTACT FINISH
  接点仕上げ
  1:GOLD(0.1μm MIN) OVER NICKEL
  2:GOLD(0.3μm MIN) OVER NICKEL

NO.	DESCRIPTION	QTY.	MATERIAL	FINISH	REMARKS
5	STOPPER	2	COPPER ALLOY	TIN OVER NICKEL	
4	HOLD DOWN	2	COPPER ALLOY	TIN OVER NICKEL	
3	INSULATOR	1	GLASS FILLED LCP		UL94 V-0 COLOR:BLACK
2	BOTTOM SIDE CONTACT	156	COPPER ALLOY	CONTACT AREA: REFER TO "DESIGNATION" SOLDERING AREA: GOLD FLASH OVER NICKEL	
1	TOP SIDE CONTACT	154	COPPER ALLOY		

仕様書(SPECIFICATION)	JACS-10543-*
一般公差(GENERAL TOLERANCE)	
寸法(DIMENSION)	角度(ANGLES)
. ±0.8	X° ±
.X ±0.4	X°X' ±
.XX ±0.1	
.XXX±	

第1版(ORIGINAL DATE)	31.Oct.2008
製図 DR.	
担当 CHK.	M.KIMURA
査閲 APPD.	—
承認 APPD.	M.Watanabe
質量(MASS)	

尺度(SCALE) 2:1
シリーズ(SERIES) MM70
名称(TITLE) MM70-314-310B1-*
図面番号(DRAWING NO.) SJ109265
版数(REV.) 1

日本航空電子工業株式会社
JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT (C) 2008, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

DOF-O-2147(05.08)

0 10 20 30 40 50 60 70 80 90 100

WISDOM承認
2009.06.16 / 09:49:31 / 024573
Reference Only (Check Out)