
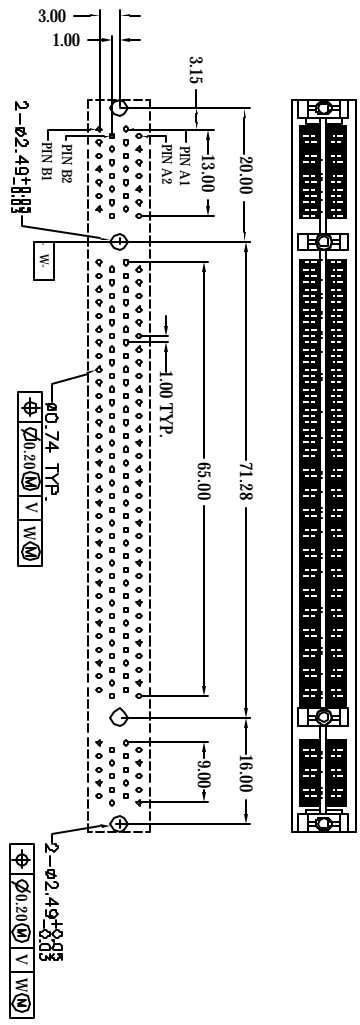




PRODUCT DRAWING

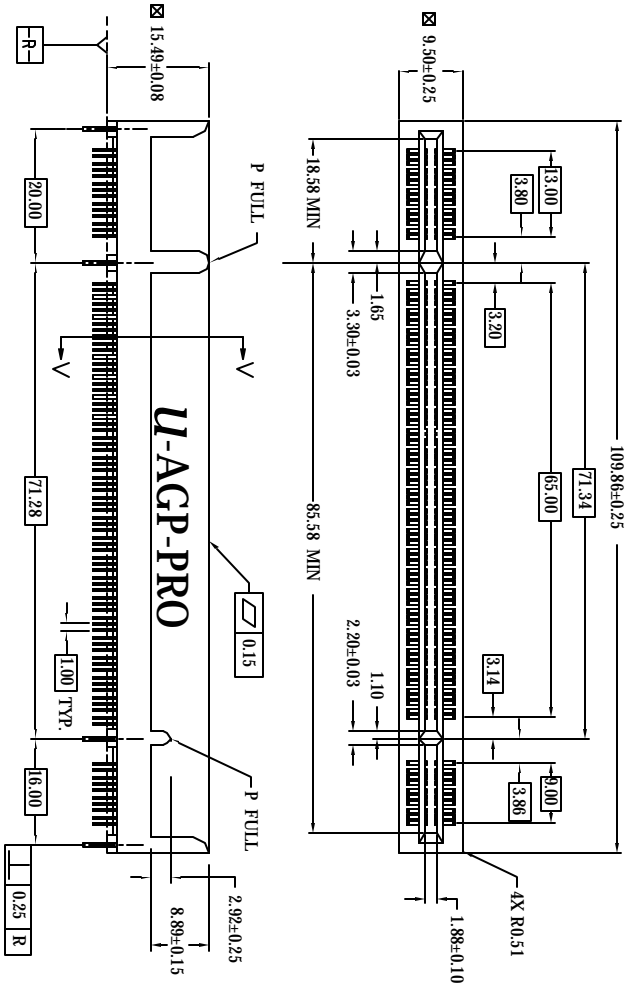

1 2 3 4 5

- * NOTE**
1. HOUSING MATERIAL: PBT
 2. CONTACT MATERIAL: PHOSPHOR BRONZE
 3. COLOR: BROWN
 4. PLATING: GOLD FLASH IN CONTACT AREA, TIN / LEAD ON SOLDER TAIL UNDERPLATE, 75µm / 30µ" MIN. NICKEL OVERALL

- * PERFORMANCE:**
1. CURRENT RATING: 1A
 2. CONTACT RESISTANCE: 30 MILLOHMS MAX.
 3. INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 4. DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
 5. CAPACITANCE: 2PF MAX.
 6. VOLTAGE: 125V/
 7. MATING FORCE: 0.55KG (MAX) PER OPPOSING CONTACT PAIR
 8. WITHDRAWAL FORCE: 0.1KG (MIN) PER CONTACT PAIR
 9. MARK ACP

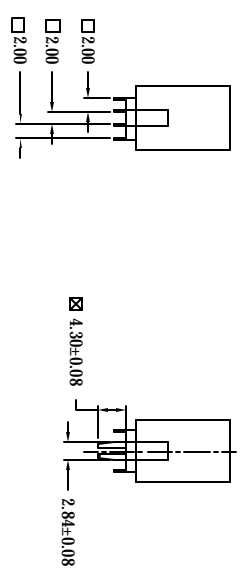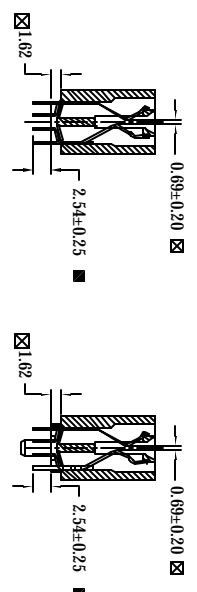

Sullins Electronics
Tel: 760 744-0125
www.SullinsElectronics.com
San Marcos, CA
Fax: 760 744-6081

Universal ACP Pro 2X90
PART NO: TPCWED00DKHN-TACP
DRAWING NO: TACP 2 x 90
UNITS: m/m
SCALE: NTS
SHEET: 1 OF 1
REV: A1
TOLERANCE: m/m
DIMENSIONS: AS SHOWN UNLESS OTHERWISE SPECIFIED
REF. NO.: TACP290

STN	DATE	REVISION	APPROVAL
05/02/00		INITIAL DRAWING	
09/22/01		REV: A1-A1	

CRITICAL
 MAJOR
 MINOR
 REF.