


REV ISIONS		DATE	BY	APP
M1	E20-05-012722	24JUL06	BSV	MK
M2	REV PER E20-09-021810	11AUG09	KK	AEG

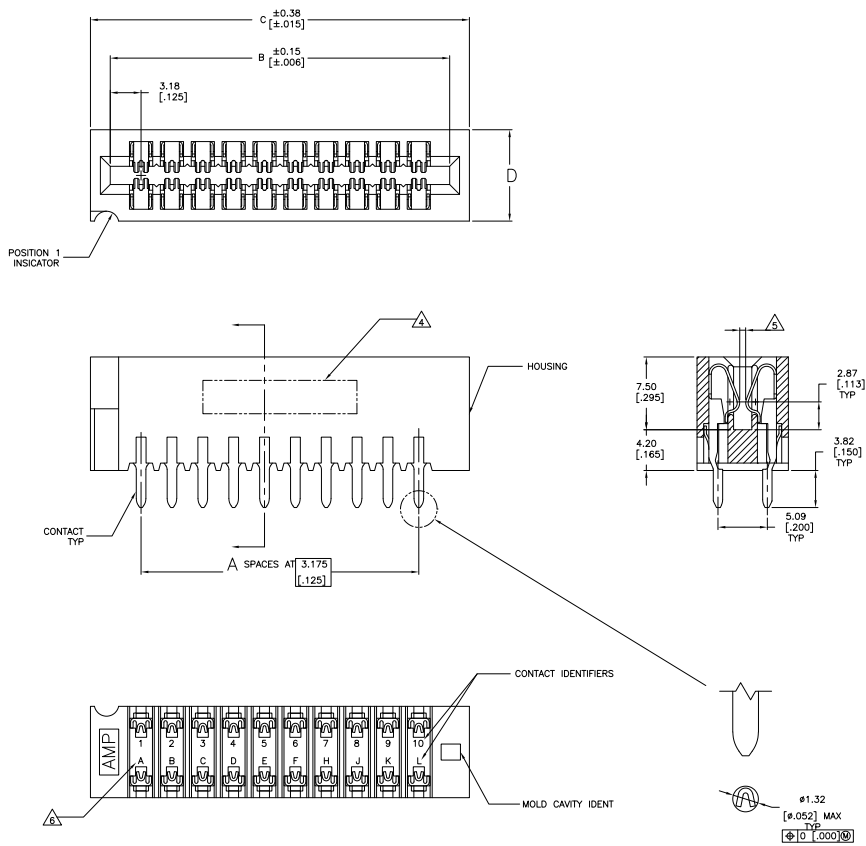

SCALE 10:1

- △ HOUSING: GLASS FILLED POLYESTER, GREEN CONTACTS: PHOSPHOR BRONZE
- △ 1.27mm[.000050] MIN THICK NICKEL PLATE ALL OVER, 0.76mm[.000030] MIN THICK GOLD PLATE OVER NICKEL IN CONTACT AREA AND 2.54mm[.000100] MIN THICK TIN-LEAD ON SOLDERTAIL
- △ 1.27mm[.000050] MIN THICK NICKEL PLATE ALL OVER, 0.76mm[.000050] MIN THICK GOLD PLATE OVER NICKEL IN CONTACT AREA AND 2.54mm[.000100] MIN THICK TIN-LEAD ON SOLDERTAIL
- △ AMP PART NUMBER AND DATE CODE MARKED IN THIS AREA
- △ ACCEPTS 1.40-1.78[.055-.070] MATING DAUGHTERCARD
- △ MOLDED CHARACTERS (UPPER & LOWER CASE LETTERS FOLLOWED BY UPPER CASE LETTERS AA, AB, ETC.) OMITTING LETTERS G,I,O, & Q
- △ 1.27mm[.000050] MIN THICK NICKEL PLATE ALL OVER, 0.76mm[.000030] MIN THICK GOLD PLATE OVER NICKEL IN CONTACT AREA AND 2.54mm[.000100] MIN THICK TIN ON SOLDERTAIL
- △ 1.27mm[.000050] MIN THICK NICKEL PLATE ALL OVER, 0.76mm[.000050] MIN THICK GOLD PLATE OVER NICKEL IN CONTACT AREA AND 2.54mm[.000100] MIN THICK TIN ON SOLDERTAIL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	9.40 [.370]	83.44 [3.285]	98.42 [3.125]	23	△	24	8-530671-3
OBSOLETE	9.40 [.370]	134.24 [5.285]	130.18 [5.125]	39	△	40	8-530671-0
OBSOLETE	9.40 [.370]	121.54 [4.785]	117.48 [4.625]	35	△	36	7-530671-9
OBSOLETE	9.40 [.370]	102.49 [4.035]	98.42 [3.875]	29	△	30	7-530671-7
OBSOLETE	9.40 [.370]	96.14 [3.785]	92.08 [3.625]	27	△	28	7-530671-6
OBSOLETE	9.40 [.370]	77.099 [3.025]	73.025 [2.875]	21	△	22	7-530671-5
OBSOLETE	9.40 [.370]	64.39 [2.535]	60.32 [2.375]	17	△	18	7-530671-4
OBSOLETE	9.40 [.370]	54.86 [2.160]	50.80 [2.000]	14	△	15	7-530671-3
OBSOLETE	9.40 [.370]	38.99 [1.535]	34.92 [1.375]	9	△	10	7-530671-2
OBSOLETE	9.40 [.370]	26.29 [1.035]	22.22 [.875]	5	△	6	7-530671-1
OBSOLETE	9.40 [.370]	92.14 [3.785]	92.08 [3.625]	27	△	28	6-530671-4
OBSOLETE	9.40 [.370]	83.44 [3.285]	98.42 [3.125]	23	△	24	3-530671-3
9 OBSOLETE	9.40 [.370]	134.24 [5.285]	130.18 [5.125]	39	△	40	3-530671-0
9 OBSOLETE	9.40 [.370]	121.54 [4.785]	117.48 [4.625]	35	△	36	2-530671-9
9 SUPERSEDED	9.40 [.370]	102.49 [4.035]	98.42 [3.875]	29	△	30	2-530671-7
OBSOLETE	9.40 [.370]	96.14 [3.785]	92.08 [3.625]	27	△	28	2-530671-6
OBSOLETE	9.40 [.370]	64.39 [2.535]	60.32 [2.375]	17	△	18	2-530671-4
OBSOLETE	9.40 [.370]	54.86 [2.160]	50.80 [2.000]	14	△	15	2-530671-3
OBSOLETE	9.40 [.370]	38.99 [1.535]	34.92 [1.375]	9	△	10	2-530671-2
OBSOLETE	9.40 [.370]	26.29 [1.035]	22.22 [.875]	5	△	6	2-530671-1
OBSOLETE	9.40 [.370]	92.14 [3.785]	92.08 [3.625]	27	△	28	1-530671-4

D	C	B	A	CONTACT FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. TYS ELECTRONICS CORPORATION, Harrisburg, Pa 17105-3608

CONNECTIONS: DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES: .010 (10) MAX. FINISH: .0001 (10) MAX. MATERIAL: PHOSPHOR BRONZE. CONTACTS: PHOSPHOR BRONZE. HOUSING: GLASS FILLED POLYESTER. CONTACTS: PHOSPHOR BRONZE. CONTACTS: PHOSPHOR BRONZE. CONTACTS: PHOSPHOR BRONZE.

DATE: 11/07/09 DRAWN BY: A1007799 CHECKED BY: S.1

CUSTOMER DRAWING