

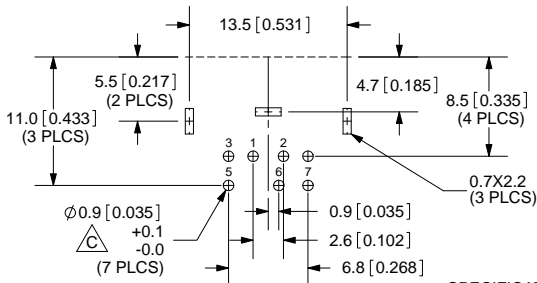

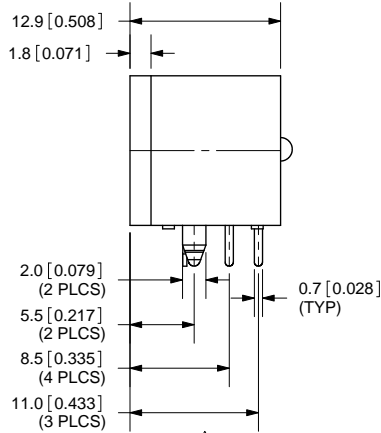


REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/25/2005
B	added missing dimensions	1/29/2008
C	dimension updates and additions	11/9/2010

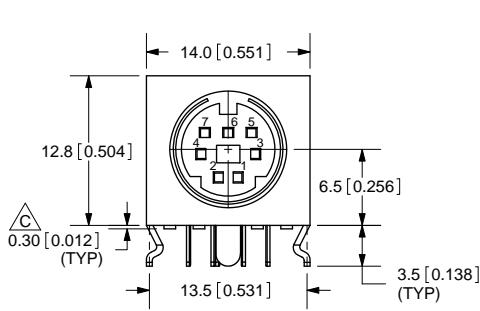

HOLE LAYOUT  
TOP VIEW

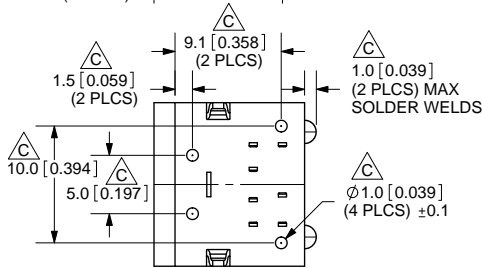

TOLERANCE:  
±0.2mm UNLESS OTHERWISE  
SPECIFIED



**SPECIFICATIONS:**  
 RATING: 12V DC @ 2A; 100V AC @ 1A  
 INSULATION RESISTANCE: 10M OHMS MIN; 250V DC  
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSERTION FORCE: 5KG MAX  
 WITHDRAWAL FORCE: 0.8KG~3.5KG  
 LIFE: 5,000 CYCLES



20050 SW 112th Ave.  
 Tualatin, OR 97062  
 Phone: 503-612-2300  
 800-275-4899  
 Fax: 503-612-2383  
 Website: www.cui.com

MATERIAL	PLATING	TITLE:	REV:
SHIELDING PLATE	Steel	MINIATURE CIRCULAR DIN CONNECTOR	C
CONTACT TERMINALS (1-7)	Phosphor Bronze	PART NO. MD-70SMK	UNITS: MM [INCHES]
EARTH TERMINALS	Brass	DRAWN BY: ZRJ	APPROVED BY:
HOUSING	PBT	SCALE: 2:1	

PC FILE NAME:  
MD-70SMK

COPYRIGHT 2010 BY CUI INC.