


REV.	DESCRIPTION	DATE
A	NEW DRAWING	12/12/2005



1	BLACK
2	GREEN
3	YELLOW
4	RED

**SPECIFICATIONS:**  
 RATING: 12V DC @ 2A; 100V AC @ 1A  
 INSULATION RESISTANCE: 50M OHMS MIN; 250V DC.  
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSERTION FORCE: 4.5KG MAX  
 WITHDRAWAL FORCE: 0.8KG-3.0KG  
 LIFE: 5,000 CYCLES  
 OPERATING TEMP: -40° ~ +85°C

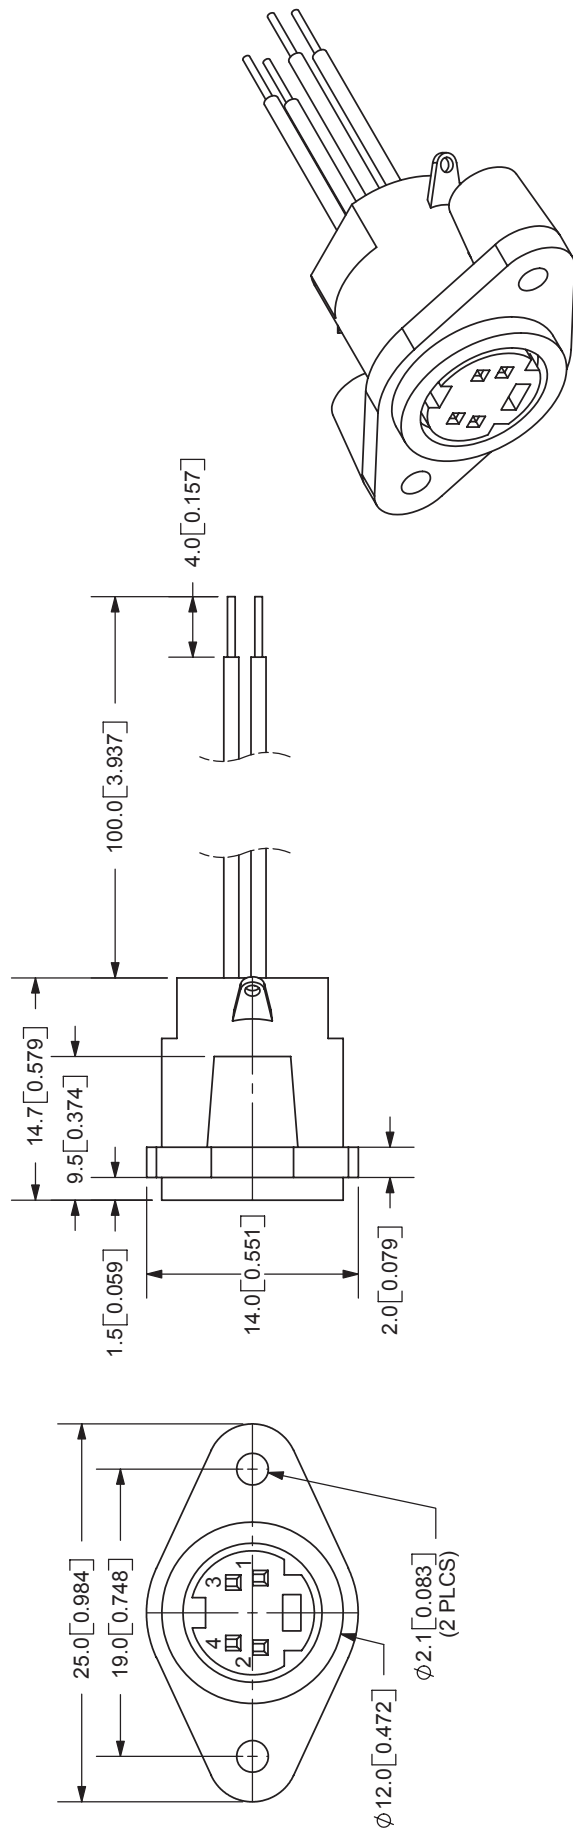

20050 SW 112th Ave.  
 Tualatin, OR 97062  
 Phone: 503-643-4899  
 800-275-4899  
 Fax: 503-372-1266  
 Website: www.cui.com

TOLERANCE:  
 $\pm 0.2\text{mm}$

TITLE:	MINI-DIN RECEPTACLE, PANEL MT, 4P	REV:	A
PART NO:	MD-40PL100	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	2:1

PC FILE NAME: MD-40PL100  
 COPYRIGHT 2006 BY CUI INC.