


REV.	DESCRIPTION	DATE
A	NEW DRAWING	1/31/2006
B	Added missing dimensions	11/7/2006

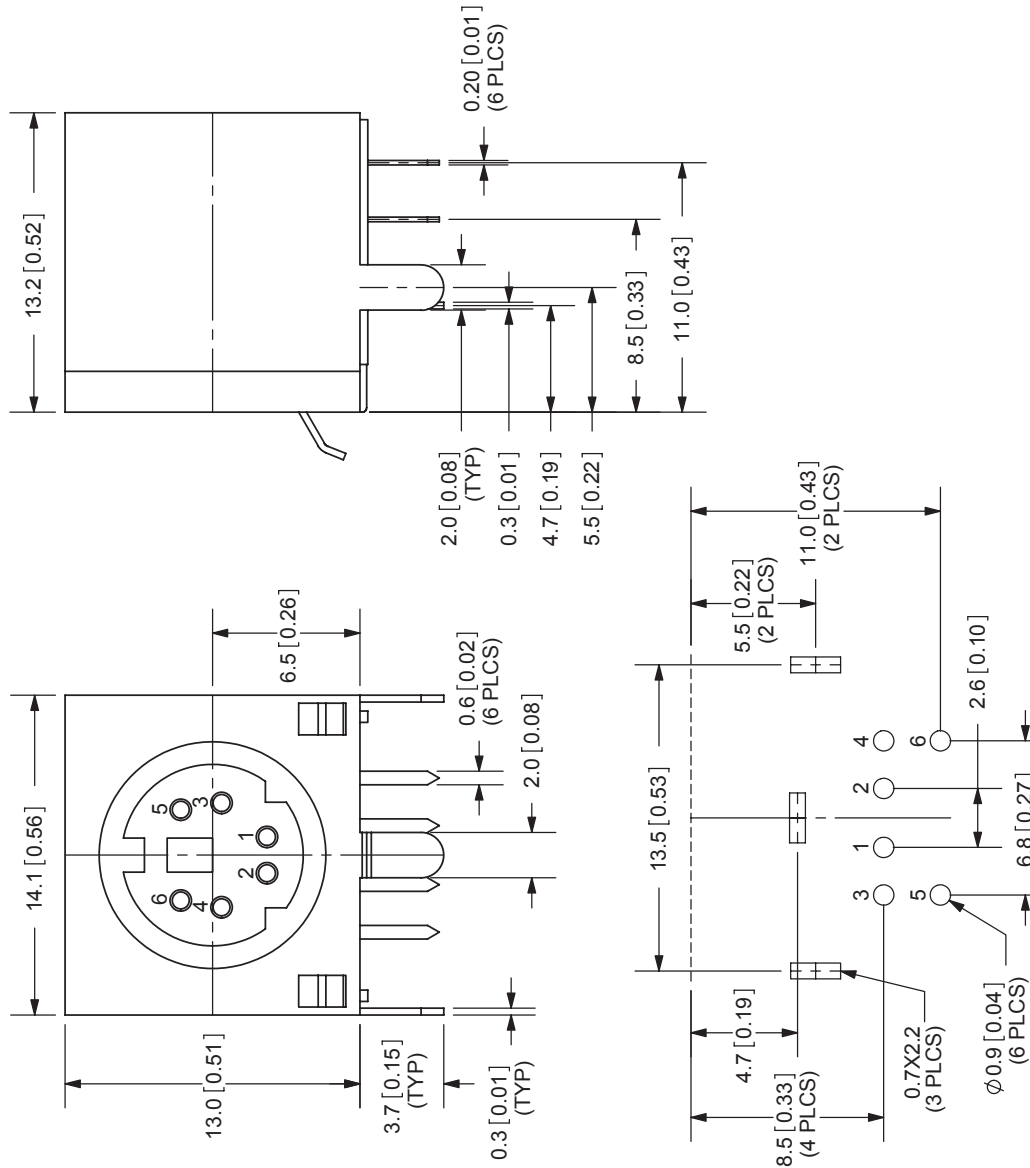

SPECIFICATIONS:
 RATING: 12V DC @ 2A; 100V AC @ 1A
 INSULATION RESISTANCE: 50M OHMS MIN: 250V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSERTION FORCE: 1.0KG~4.5KG MAX
 WITHDRAWAL FORCE: 0.8KG~3.0KG
 LIFE: 5,000 CYCLES
 OPERATING TEMP: -40° ~ +85°C

TITLE: MINIATURE CIRCULAR DIN CONNECTOR	REV: B
PART NO: MD-60SG	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 3:1

TOLERANCE:
 $\pm 0.2\text{mm}$



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

CONTACT TERMINALS (1-6)	MATERIAL	PLATING
Phosphor Bronze <td>Phosphor Bronze <td>Silver</td> </td>	Phosphor Bronze <td>Silver</td>	Silver
EARTH TERMINALS <td>Brass <td>Tin</td> </td>	Brass <td>Tin</td>	Tin
HOUSING <td>PBT <td></td> </td>	PBT <td></td>	

PC FILE NAME: MD-60SG
 COPYRIGHT 2006 BY CUI INC.