



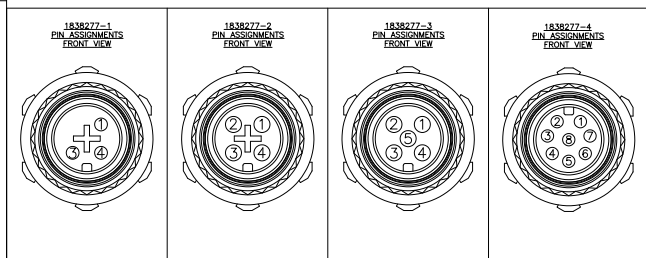

- NOTES:**
- | | | |
|---|---|---|
| 1. ELECTRICAL DATA: | CONTACT RESISTANCE:
INSULATION RESISTANCE: | 10 mOhm MAX
100 Mohm MIN at 500VDC |
| | CURRENT RATING:
BREAKDOWN VOLTAGE: | 5 AMP @ 1, 4 and 5 POSITIONS)
500 VAC MIN PER MINUTE |
| 2. ENVIRONMENTAL: | OPERATING TEMPERATURE:
SEALING REQUIREMENTS: | -25°C TO +90°C
IP67 |
| 3. PACKAGING: | | 107-3334 |
| 4. SEAL FOR CABLE OD: | | ø4.5mm - ø6.5mm |
| 5. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE. | | |
| 6. ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED. | | |

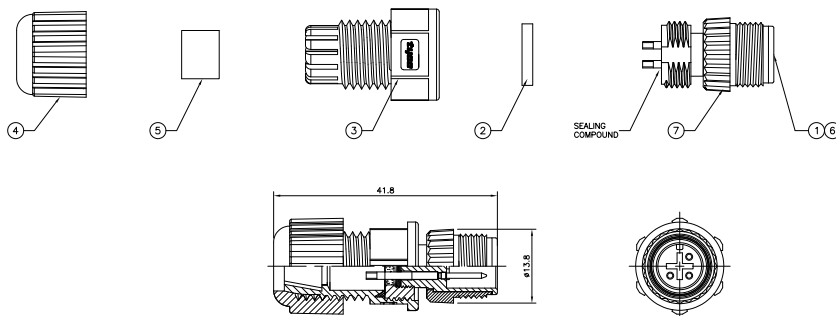

M12 PLASTIC FIELD SERVICEABLE CONNECTOR, MALE PIN, SOLDER TYPE	8	1838277-4
M12 PLASTIC FIELD SERVICEABLE CONNECTOR, MALE PIN, SOLDER TYPE	5	1838277-3
M12 PLASTIC FIELD SERVICEABLE CONNECTOR, MALE PIN, SOLDER TYPE	4	1838277-2
M12 PLASTIC FIELD SERVICEABLE CONNECTOR, MALE PIN, SOLDER TYPE	3	1838277-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN	1440000	DESCRIPTION	INV. OF POSTMASTER NUMBER
		MR Money	1440000	 TE	TE Connectivity
DIMENSIONS:		Wheeler-King		NAME	
mm		Wheeler-King		M12 PLASTIC FIELD SERVICEABLE CONNECTOR, MALE PIN, SOLDER TYPE	
		APPLICATION SPEC		SIZE CASE CODE DRAWING NO	
MATERIAL		WEIGHT		RESTRICTED TO	
-		-		A2 00779 C-1838277	
FINISH		CUSTOMER DRAWING		SCALE NTS	
-		-		SHEET 1 OF 1 REV A1	