

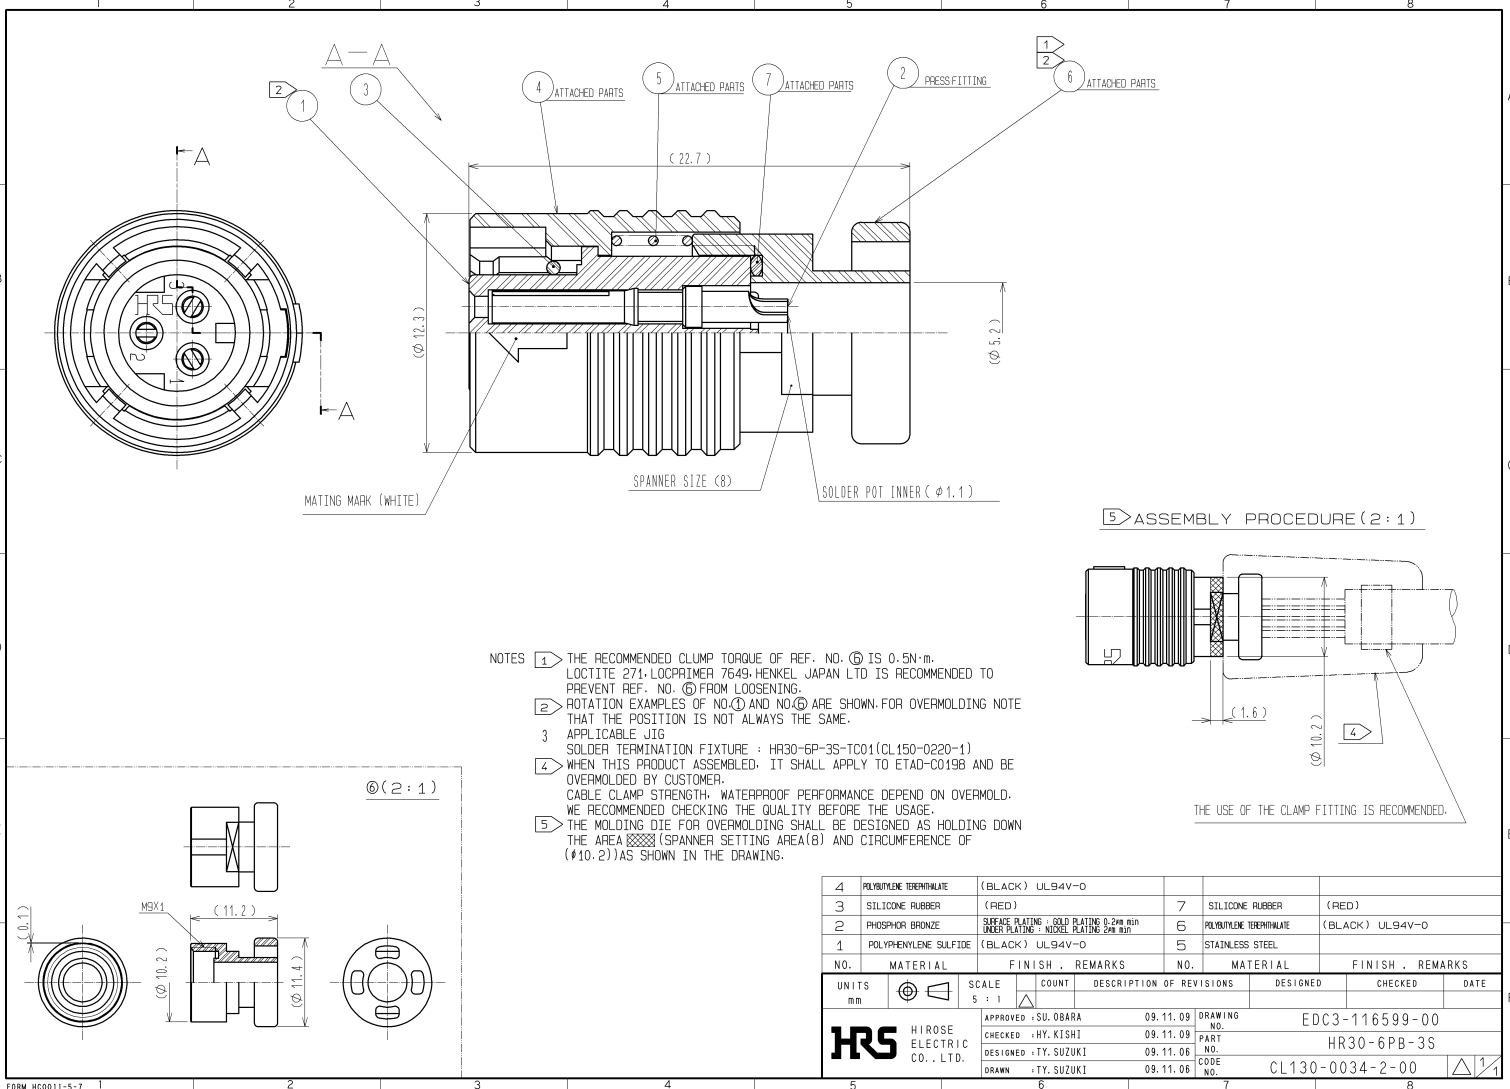


APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-25 °C TO +85 °C	STORAGE TEMPERATURE RANGE	-10 °C TO +60 °C	
	VOLTAGE	AC 100 V , DC 140 V			
	CURRENT	5 A	APPLICABLE CABLE		
<b>SPECIFICATIONS</b>					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
<b>CONSTRUCTION</b>					
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	X	X	
MARKING	CONFIRMED VISUALLY.		X	X	
<b>ELECTRIC CHARACTERISTICS</b>					
CONTACT RESISTANCE	CONTACT SHALL BE MEASURED AT DC 1 A	5 mΩ MAX.	X	X	
INSULATION RESISTANCE	100 V DC.	1000 MΩ MIN.	X	X	
VOLTAGE PROOF	300 V AC. FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	X	
<b>MECHANICAL CHARACTERISTICS</b>					
CONTACT INSERTION AND WITHDRAWAL FORCES	$\phi 0.991^{+0.003}_0$ BY STEEL GAUGE.	INSERTION AND WITHDRAWAL FORCES : 0.2 N MIN.	X	-	
CONNECTOR INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICABLE CONNECTOR.	INSERTION AND WITHDRAWAL FORCES LOCKING DEVICE WITH UNLOCK : — N MAX. LOCKING DEVICE WITH LOCK : 30 N MAX.	X	-	
MECHANICAL OPERATION	1000 TIMES INSERTIONS AND EXTRACTIONS.	CONTACT RESISTANCE: 10 mΩ MAX.	X	-	
VIBRATION	FREQUENCY: 10 → 55 → 10 (Hz) (1CYC, 5min), SINGLE AMPLITUDE 0.75 mm, AT 10 CYC, FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 10 μs. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	-	
SHOCK	490 m/s <sup>2</sup> DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 10 μs. ② NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	-	
<b>ENVIRONMENTAL CHARACTERISTICS</b>					
DAMP HEAT (STEADY STATE)	EXPOSED AT 40 °C, 90 TO 95 %, 96 h.	① INSULATION RESISTANCE: 10 MΩ MIN (AT HIGH HUMIDITY). ② INSULATION RESISTANCE: 100 MΩ MIN (AT DRY). ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-	
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55 → R/T <sup>(1)</sup> → +85 → R/T °C TIME 30 → 10 TO 15 → 30 → 10 TO 15 min UNDER 5 CYCLES.	① INSULATION RESISTANCE: 100 MΩ MIN. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-	
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	NO HEAVY CORROSION RUIN THE FUNCTION.	X	-	
DRY HEAT	EXPOSED AT + 85 °C , 96 h.	NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-	
COLD	EXPOSED AT - 55 °C , 96 h.	NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-	
RESISTANCE TO SOLDERING HEAT	SOLDER TEMPERATURE +380±10°C, FOR IMMERSION DURATION, 3 s.	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINALS	X	-	
SOLDERABILITY	SOLDERED AT SOLDER TEMPERATURE, +350±10°C FOR IMMERSION DURATION, 2 TO 3 s	SOLDER SURFACE TO BE FREE FROM PIN-HOLE, NO WETTING AND OTHER DEFECTS.	X	-	
SEALING	EXPOSED AT A DEPTH OF 1 m FOR 0.5 h.	NO WATER PENETRATION INSIDE CONNECTOR.	X	-	
AIRTIGHTNESS	APPLY AIR PRESSURE 17.6kPa FOR 0.5min TO INSIDE CONNECTOR.	NO AIR BUBBLES INSIDE CONNECTOR.	X	-	
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
④					
REMARK			APPROVED	SU. OBARA	09. 11. 09
NOTES(1)R/T : ROOM TEMPERATURE			CHECKED	HY. KISHI	09. 11. 09
(2) SEALING AND AIRTIGHTNESS SHALL BE TESTED BY APPLICABLE CONNECTOR.			DESIGNED	TY. SUZUKI	09. 11. 06
Unless otherwise specified, refer to JIS C 5402.			DRAWN	TY. SUZUKI	09. 11. 06
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-116599-00
<b>HRS</b>	SPECIFICATION SHEET		PART NO.	HR30-6PB-3S	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL130-0034-2-00	△ 1/1

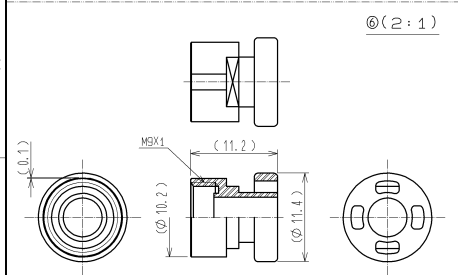

- NOTES
- 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ IS 0.5N·m. LOCTITE 271-LOCPRIMER 7649-HENKEL JAPAN LTD IS RECOMMENDED TO PREVENT REF. NO. ⑥ FROM LOOSENING.
  - 2 ROTATION EXAMPLES OF NO.① AND NO.⑥ ARE SHOWN.FOR OVERMOLDING NOTE THAT THE POSITION IS NOT ALWAYS THE SAME.
  - 3 APPLICABLE JIG
  - 4 SOLDER TERMINATION FIXTURE : HR30-6P-3S-TC01(CL150-0220-1)
  - 5 WHEN THIS PRODUCT ASSEMBLED, IT SHALL APPLY TO ETAD-C019B AND BE OVERMOLDED BY CUSTOMER.
  - 6 CABLE CLAMP STRENGTH, WATERPROOF PERFORMANCE DEPEND ON OVERMOLD. WE RECOMMENDED CHECKING THE QUALITY BEFORE THE USAGE.
  - 7 THE MOLDING DIE FOR OVERMOLDING SHALL BE DESIGNED AS HOLDING DOWN THE AREA (SPANNER SETTING AREA(B) AND CIRCUMFERENCE OF (φ10.2)AS SHOWN IN THE DRAWING.

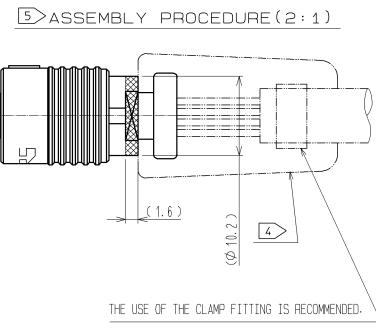

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
4	POLYBUTYLENE TEREPHTHALATE	(BLACK)	UL94V-0	7	SILICONE RUBBER	(RED)	
3	SILICONE RUBBER	(RED)		6	POLYBUTYLENE TEREPHTHALATE	(BLACK)	UL94V-0
2	PHOSPHOR BRONZE	SURFACE PLATING : GOLD PLATING 0.2μm min BAKER PLATING : NICKEL PLATING 200 μm		5	STAINLESS STEEL		
1	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

HIROSE ELECTRIC CO., LTD.	APPROVED : SU. OBARA	09.11.09	DRAWING NO.	EDC3-116599-00
	CHECKED : HY. KISHI	09.11.09	PART NO.	HR30-6PB-3S
	DESIGNED : TY. SUZUKI	09.11.06	CODE NO.	CL130-0034-2-00
	DRAWN : TY. SUZUKI	09.11.06		