

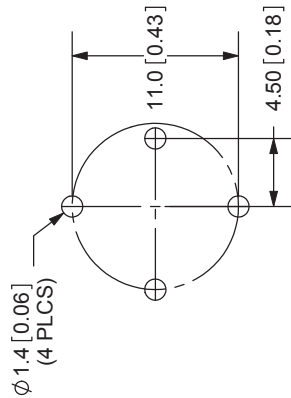
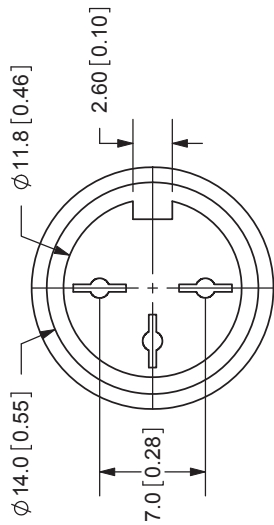


REV.	DESCRIPTION	DATE
A	NEW DRAWING	12/5/2005
B	rating update	8/28/2008

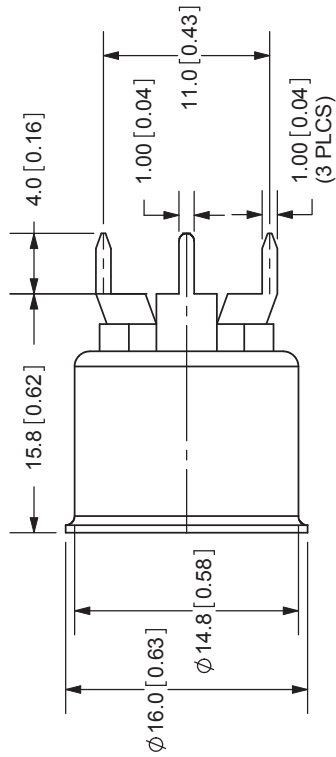

PCB LAYOUT  
FRONT VIEW

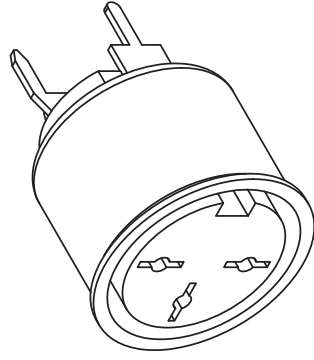

TOLERANCE:  
X: ±0.5  
X.X ±0.3mm  
X.XX ±0.15mm



**CUI INC**

20050 SW 112th Ave.  
Tualatin, OR 97062  
Phone: 503-612-2300  
800-275-4899  
Fax: 503-612-2383  
Website: www.cui.com

**SPECIFICATIONS:**  
RATING: 24V DC @ 1A PER PIN  
CONTACT RESISTANCE: 50m OHMS MAX  
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC  
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
LIFE: 5,000 CYCLES  
OPERATING TEMP: -20° ~ +60°C

TITLE: DIN RECEPTACLE, VERTICAL, PCB 3P	REV: B
PART NO: SD-30BV	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 2:1

	MATERIAL	PLATING
CONTACTOR	Brass	Silver
SLEEVE	Phosphor Bronze	Silver
COVER	Iron Sheet	Nickel
MOUTH BUSHING	PBT-94V0 G15	

PC FILE NAME: SD-30BV

COPYRIGHT 2008 BY CUI INC.