

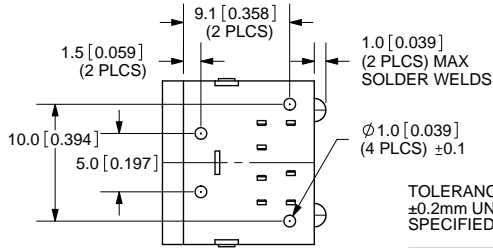
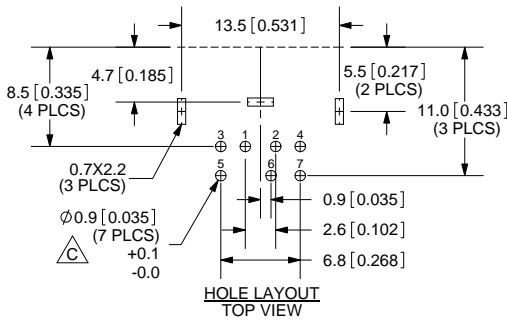



REV.	DESCRIPTION	DATE
A	NEW DRAWING	12/5/2005
B	Added dimensions	3/3/2006
C	dimension updates and additions	10/28/2010

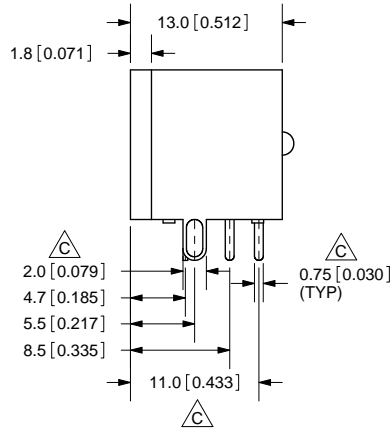

TOLERANCE:
±0.2mm UNLESS OTHERWISE
SPECIFIED

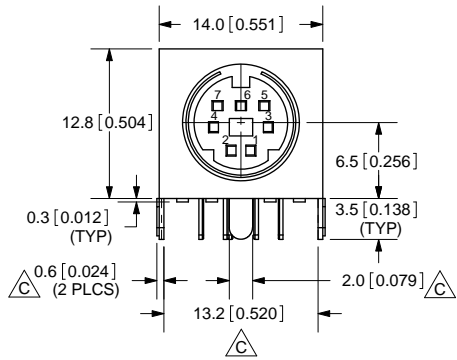

SPECIFICATIONS:
 RATING: 12V DC @ 2A; 100V AC @ 1A
 INSULATION RESISTANCE: 50M OHMS MIN; 250V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSERTION FORCE: 5KG MAX
 WITHDRAWAL FORCE: 0.8KG-3.5KG
 LIFE: 5,000 CYCLES



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

	MATERIAL	PLATING	TITLE: MINIATURE CIRCULAR DIN CONNECTOR	REV: C
SHIELDING PLATE	Steel	Tin	PART NO. MD-70SM	UNITS: MM [INCHES]
CONTACT TERMINALS (1-7)	Phosphor Bronze	Silver		
EARTH TERMINALS	Brass	Tin	DRAWN BY: ZRJ	APPROVED BY:
HOUSING	PBT			SCALE: 2:1

PC FILE NAME:
MD-70SM

COPYRIGHT 2010 BY CUI INC.