

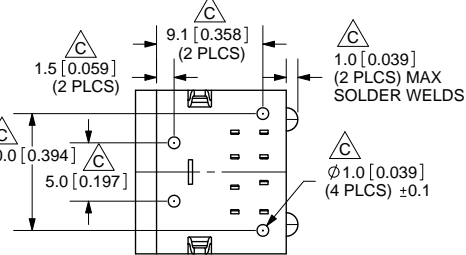
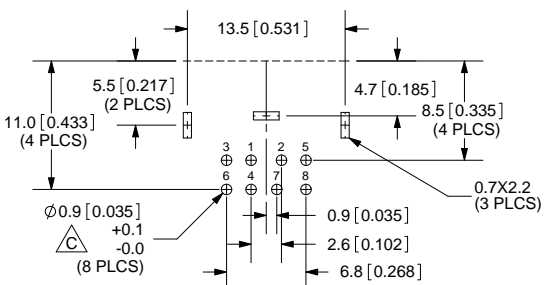



| REV. | DESCRIPTION | DATE |
|------|---------------------------------|------------|
| A | NEW DRAWING | 10/25/2005 |
| B | added missing dimensions | 1/29/2008 |
| C | dimension updates and additions | 11/9/2010 |

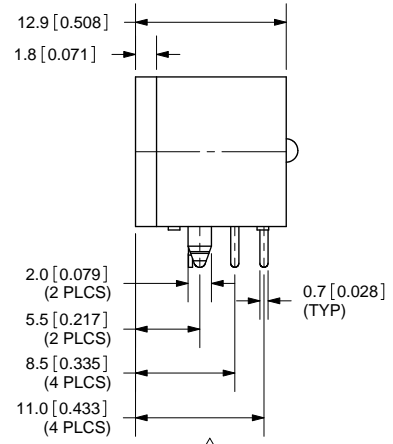

TOLERANCE:
±0.2mm UNLESS OTHERWISE
SPECIFIED

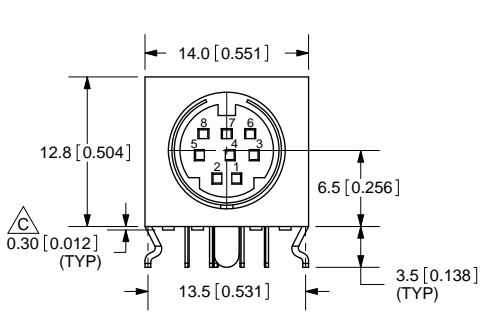

HOLE LAYOUT
TOP VIEW

SPECIFICATIONS:
 RATING: 12V DC @ 2A; 100V AC @ 1A
 INSULATION RESISTANCE: 10M OHMS MIN; 250V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSERTION FORCE: 5KG MAX
 WITHDRAWAL FORCE: 0.8KG~3.5KG
 LIFE: 5,000 CYCLES



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

| MATERIAL | PLATING | TITLE: | REV: |
|-------------------------|-----------------|----------------------------------|--------------------|
| SHIELDING PLATE | Steel | MINIATURE CIRCULAR DIN CONNECTOR | C |
| CONTACT TERMINALS (1-8) | Phosphor Bronze | PART NO. MD-80SMK | UNITS: MM [INCHES] |
| EARTH TERMINALS | Brass | DRAWN BY: ZRJ | APPROVED BY: |
| HOUSING | PBT | SCALE: 2:1 | |

PC FILE NAME:
MD-80SMK

COPYRIGHT 2010 BY CUI INC.