DRAWING MADE IN AMERICAN PROJECTION

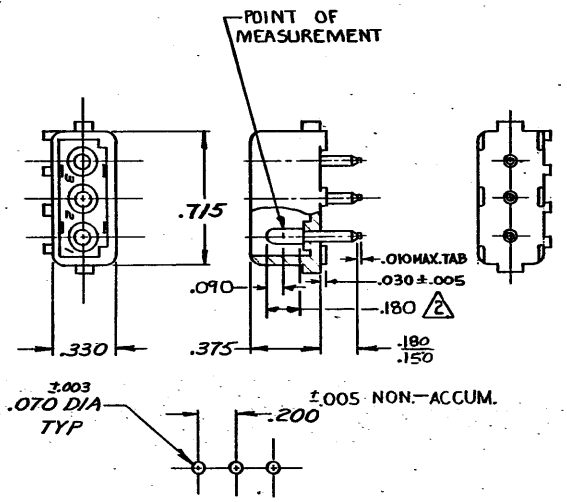

RECOMMENDED LAYOUT FOR .062 THICK P.C. BOARD

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3

2 CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

350210-2	NYLON NATURAL	COPPER ALLOY - GOLD 2
350210-1	NYLON - NATURAL	copper alloy - PRE-TIN
ASSEMBLY NO.	HSG. MATL & COLOR	PIN MATL & FINISH

Unpublished copy not to be reproduced nor published without written permission of AMP Incorporated

© 1973 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY REFERENCE ONLY

LTR	REVISION RECORD	DR	CHK	DATE
T	OBSOLETE PER ECN CM-2706	NG	RS	8-9-82
S	OBS 9-1 PER CM 2213			

REQUIRED PER ASSEMBLY

DESCRIPTION

NUMBER 350210

DR 9. Eckman 4-12-73

CHK Em Pettowhage 4/12/73

DE 4-13-73

APP 4-13-73

MATERIAL AND FINISH: SEE TABLE

WIRE - RANGE - INSULATION: — // — | — // —

TOLERANCE EXCEPT AS NOTED ±.015 ±1° 0'

SCALE: —//—

AMP INCORPORATED HARRISBURG, PENNA

CLASS .084 DIA. PIN

TYPE PIN HEADER

LOC CM B NO 350210 REV T

NAME 3 CIRCUIT MATE-N-LOK P.C. BOARD HEADER

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

WAS P-72-6198

AMP 1253 REV 11/65

Downloaded from Elcodis.com electronic components distributor