
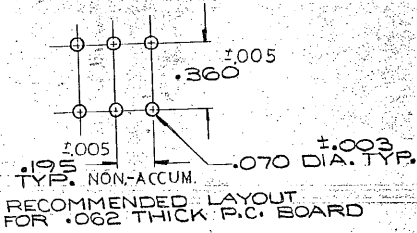


DRAWING MADE IN AMERICAN PROJECTION

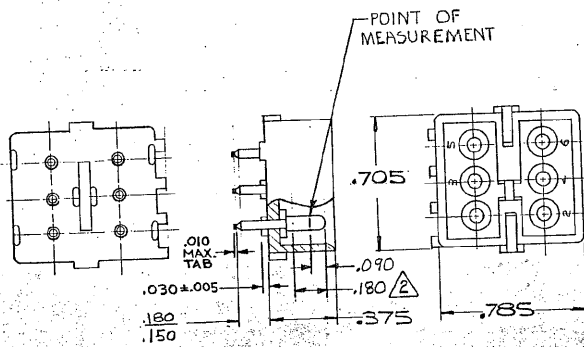

1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-3
2. CONTACT IS PLATED OVERALL WITH .000050 NICKEL, THEN .000030 GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

2 - 380999-0	NYLON	NATURAL	COPPER ALLOY	GOLD / 2
1 - 380999-0	NYLON	NATURAL	COPPER ALLOY	PRE-TIN
ASSEMBLY NO.	HSG. MATL.	COLOR	PIN MATL.	FINISH

RECOMMENDED LAYOUT FOR .062 THICK P.C. BOARD

Any third party not to be reproduced nor published without written permission of AMP Incorporated.

REQUIRED PER ASSEMBLY DR OBS 2--5 PER ECN 010118 JH RS 63521 T OBS 1-1,1-2,3-0 NG RS 8112 PER ECN CM-2706 S OBS 1-4,1-5,1-6,1-9 T3 RS 3/28/78 PER CM 2213 LTR REVISION RECORD DR CHK DATE	DR CHK APP	NUMBER NAME REMARKS ITEM NO.	CUSTOMER COPY REFERENCE ONLY	
		© 1978 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		AMP INCORPORATED HARRISBURG, PENN.
		MATERIAL AND FINISH SEE TABLE		CLASS TYPE PIN HEADER
		WIRE RANGE - INSULATION TOLERANCE EXCEPT AS NOTED SCALE 1" = 0.1"	LOC CM NO B 380999 NAME 6 CIRCUIT MATE-N-LOK P.C. BOARD HEADER	U

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.