



THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39		REVISED PER EDD-11-004587			

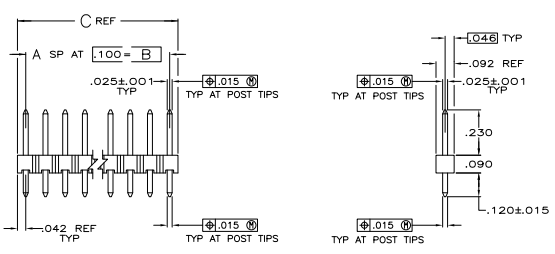

- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
 - ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- PARTS PACKAGED IN TUBES.
 - .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
 - .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
 - PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
 - HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
 - OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



REV	DATE	DESCRIPTION	BY	CHK	APP
△	△	.484 .400 4 5 5-103327-4			
△	△	3.584 3.500 35 36 5-103327-3			
△	△	1.584 1.500 15 16 5-103327-2			
△	△	.384 .300 3 4 5-103327-1			
△	△	1.384 1.300 13 14 5-103327-0			
△	△	3.984 3.900 39 40 4-103327-9			
△	△	.984 .900 9 10 4-103327-8			
△	△	.784 .700 7 8 4-103327-7			
△	△	.584 .500 5 6 4-103327-6			
△	△	.284 .200 2 3 4-103327-5			
△	△	.184 .100 1 2 4-103327-4			
△	△	.084 — — 1 4-103327-3			
△	△	1.184 1.100 1 1 12 4-103327-2			
△	△	1.084 1.000 1 1 4-103327-1			
△	△	3.984 3.900 39 40 4-103327-0			
△	△	3.884 3.800 38 39 3-103327-9			
△	△	3.784 3.700 37 38 3-103327-8			
△	△	3.684 3.600 36 37 3-103327-7			
△	△	3.584 3.500 35 36 3-103327-6			
△	△	3.484 3.400 34 35 3-103327-5			
△	△	3.384 3.300 33 34 3-103327-4			
△	△	3.284 3.200 32 33 3-103327-3			
△	△	3.184 3.100 31 32 3-103327-2			
△	△	3.084 3.000 30 31 3-103327-1			
△	△	2.984 2.900 29 30 3-103327-0			
△	△	2.884 2.800 28 29 2-103327-9			
△	△	2.784 2.700 27 28 2-103327-8			
△	△	2.684 2.600 26 27 2-103327-7			
△	△	2.584 2.500 25 26 2-103327-6			
△	△	2.484 2.400 24 25 2-103327-5			
△	△	2.384 2.300 23 24 2-103327-4			
△	△	2.284 2.200 22 23 2-103327-3			
△	△	2.184 2.100 21 22 2-103327-2			
△	△	2.084 2.000 20 21 2-103327-1			
△	△	1.984 1.900 19 20 2-103327-0			
△	△	1.884 1.800 18 19 1-103327-9			
△	△	1.784 1.700 17 18 1-103327-8			
△	△	1.684 1.600 16 17 1-103327-7			
△	△	1.584 1.500 15 16 1-103327-6			
△	△	1.484 1.400 14 15 1-103327-5			
△	△	1.384 1.300 13 14 1-103327-4			
△	△	1.284 1.200 12 13 1-103327-3			
△	△	1.184 1.100 1 1 12 1-103327-2			
△	△	1.084 1.000 1 1 1-103327-1			
△	△	.984 .900 9 10 1-103327-0			
△	△	.884 .800 8 9 103327-9			
△	△	.784 .700 7 8 103327-8			
△	△	.684 .600 6 7 103327-7			
△	△	.584 .500 5 6 103327-6			
△	△	.484 .400 4 5 103327-5			
△	△	.384 .300 3 4 103327-4			
△	△	.284 .200 2 3 103327-3			
△	△	.184 .100 1 2 103327-2			
△	△	.084 — — 1 103327-1			

PLATING	C	B	A	NO OF POSN	PART NUMBER

DESIGNER	DATE	DESCRIPTION	BY	CHK	APP
MARKETBELL	10/01/01	ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS	MARKETBELL		

THIS DRAWING IS A CONTROLLED DOCUMENT. CUSTOMER DRAWING. DATE: 4.1. SHEET: 1 OF 1. REV: S2