

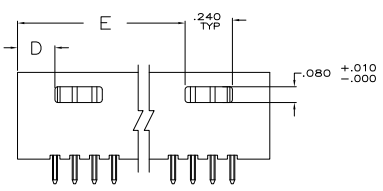
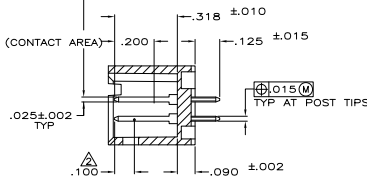
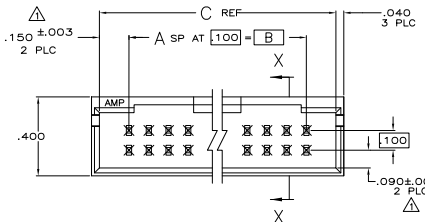


- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ MATERIAL: HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR- BLACK
 POSTS- PHOS BRONZE
- △ FINISH: POSTS- .00015 GOLD IN CONTACT AREA,
 .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL,
 ALL OVER .000050 NICKEL
- △ FINISH: POSTS- .000015 GOLD IN CONTACT AREA,
 .000100-.000200 MATTE TIN ON SOLDER TAIL,
 ALL OVER .000050 NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00				
K2		REVISED PER ECU-11-004587	11MMR11	RK	HMR



FINISH	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
△ OBSOLETE	3.490	.190	3.800	3.500	35	72	8-102619-4
△ OBSOLETE	3.390	.190	3.700	3.400	34	70	8-102619-3
△ OBSOLETE	3.290	.190	3.600	3.300	33	68	8-102619-2
△ OBSOLETE	3.190	.190	3.500	3.200	32	66	8-102619-1
△ OBSOLETE	3.090	.190	3.400	3.100	31	64	8-102619-0
△ OBSOLETE	2.990	.190	3.300	3.000	30	62	7-102619-9
△ OBSOLETE	2.890	.190	3.200	2.900	29	60	7-102619-8
△ OBSOLETE	2.790	.190	3.100	2.800	28	58	7-102619-7
△ OBSOLETE	2.690	.190	3.000	2.700	27	56	7-102619-6
△ OBSOLETE	2.590	.190	2.900	2.600	26	54	7-102619-5
△ OBSOLETE	2.490	.190	2.800	2.500	25	52	7-102619-4
△ OBSOLETE	2.390	.190	2.700	2.400	24	50	7-102619-3
△ OBSOLETE	2.290	.190	2.600	2.300	23	48	7-102619-2
△ OBSOLETE	2.190	.190	2.500	2.200	22	46	7-102619-1
△ OBSOLETE	2.090	.190	2.400	2.100	21	44	7-102619-0
△ OBSOLETE	1.990	.190	2.300	2.000	20	42	6-102619-9
△ OBSOLETE	1.890	.190	2.200	1.900	19	40	6-102619-8
△ OBSOLETE	1.790	.190	2.100	1.800	18	38	6-102619-7
△ OBSOLETE	1.690	.190	2.000	1.700	17	36	6-102619-6
△ OBSOLETE	1.590	.190	1.900	1.600	16	34	6-102619-5
△ OBSOLETE	1.490	.190	1.800	1.500	15	32	6-102619-4
△ OBSOLETE	1.390	.190	1.700	1.400	14	30	6-102619-3
△ OBSOLETE	1.290	.190	1.600	1.300	13	28	6-102619-2
△ OBSOLETE	1.190	.190	1.500	1.200	12	26	6-102619-1
△ OBSOLETE	.990	.190	1.300	1.000	10	22	5-102619-9
△ OBSOLETE	.890	.190	1.200	.900	9	20	5-102619-8
△ OBSOLETE	.790	.190	1.100	.800	8	18	5-102619-7
△ OBSOLETE	.690	.190	1.000	.700	7	16	5-102619-6
△ OBSOLETE	.590	.190	.900	.600	6	14	5-102619-5
△ OBSOLETE	.490	.190	.800	.500	5	12	5-102619-4
△ OBSOLETE	.390	.190	.700	.400	4	10	5-102619-3
△ OBSOLETE	.290	.190	.600	.300	3	8	5-102619-2
△ OBSOLETE	.190	.190	.500	.200	2	6	5-102619-1
△ OBSOLETE	3.490	.190	3.800	3.500	35	72	3-102619-4
△ OBSOLETE	3.390	.190	3.700	3.400	34	70	3-102619-3
△ OBSOLETE	3.290	.190	3.600	3.300	33	68	3-102619-2
△ OBSOLETE	3.190	.190	3.500	3.200	32	66	3-102619-1
△ OBSOLETE	3.090	.190	3.400	3.100	31	64	3-102619-0
△ OBSOLETE	2.990	.190	3.300	3.000	30	62	2-102619-9
△ OBSOLETE	2.890	.190	3.200	2.900	29	60	2-102619-8
△ OBSOLETE	2.790	.190	3.100	2.800	28	58	2-102619-7
△ OBSOLETE	2.690	.190	3.000	2.700	27	56	2-102619-6
△ OBSOLETE	2.590	.190	2.900	2.600	26	54	2-102619-5
△ OBSOLETE	2.490	.190	2.800	2.500	25	52	2-102619-4
△ OBSOLETE	2.390	.190	2.700	2.400	24	50	2-102619-3
△ OBSOLETE	2.290	.190	2.600	2.300	23	48	2-102619-2
△ OBSOLETE	2.190	.190	2.500	2.200	22	46	2-102619-1
△ OBSOLETE	2.090	.190	2.400	2.100	21	44	2-102619-0
△ OBSOLETE	1.990	.190	2.300	2.000	20	42	1-102619-9
△ OBSOLETE	1.890	.190	2.200	1.900	19	40	1-102619-8
△ OBSOLETE	1.790	.190	2.100	1.800	18	38	1-102619-7
△ OBSOLETE	1.690	.190	2.000	1.700	17	36	1-102619-6
△ OBSOLETE	1.590	.190	1.900	1.600	16	34	1-102619-5
△ OBSOLETE	1.490	.190	1.800	1.500	15	32	1-102619-4
△ OBSOLETE	1.390	.190	1.700	1.400	14	30	1-102619-3
△ OBSOLETE	1.290	.190	1.600	1.300	13	28	1-102619-2
△ OBSOLETE	1.190	.190	1.500	1.200	12	26	1-102619-1
△ OBSOLETE	1.090	.190	1.400	1.100	11	24	1-102619-0
△ OBSOLETE	.990	.190	1.300	1.000	10	22	102619-9
△ OBSOLETE	.890	.190	1.200	.900	9	20	102619-8
△ OBSOLETE	.790	.190	1.100	.800	8	18	102619-7
△ OBSOLETE	.690	.190	1.000	.700	7	16	102619-6
△ OBSOLETE	.590	.190	.900	.600	6	14	102619-5
△ OBSOLETE	.490	.190	.800	.500	5	12	102619-4
△ OBSOLETE	.390	.190	.700	.400	4	10	102619-3
△ OBSOLETE	.290	.190	.600	.300	3	8	102619-2
△ OBSOLETE	.190	.190	.500	.200	2	6	102619-1

△ SUPERCEDED BY 5-102619-7

THIS DRAWING IS A CONTROLLED DOCUMENT. SEE SECTION 1.1 FOR DETAILS.

TE Connectivity

HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, VERTICAL, .100X100 CL, WITH .025 SQ. POSTS

SIZE: 4.1

CUSTOMER DRAWING