
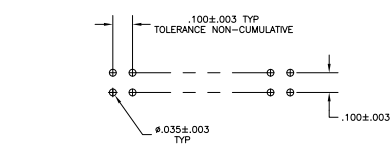
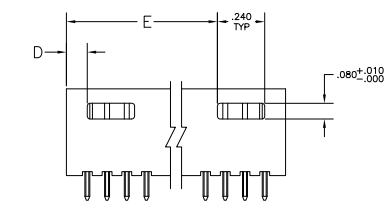
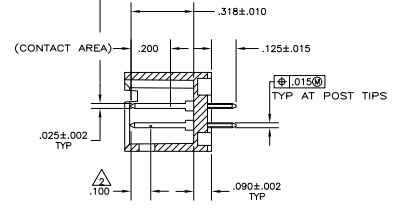
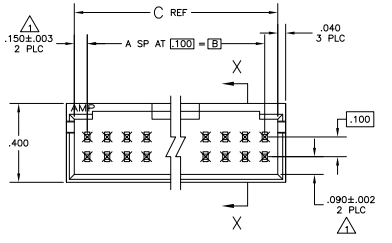


THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD	00	REVISED PER ECU-11-004587	11M111	RK	HMR



RECOMMENDED HOLE LAYOUT

- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS
- △ INDICATED PARTS ARE PACKED IN "GANG-OF -TUBES"
- △ POSTS: .00030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL
- △ POSTS: .00030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△	△	1.090	.190	1.400	1.100	1.1	24	8-103169-5	△	OBSOLETE	△	1.090	.190	1.400	1.100	1.1	24	3-103169-5
△	△	3.490	.190	3.800	3.500	35	72	8-103169-4	△	△	3.490	.190	3.800	3.500	35	72	3-103169-4	
△	△	3.390	.190	3.700	3.400	34	70	8-103169-3	△	△	3.390	.190	3.700	3.400	34	70	3-103169-3	
△	△	3.290	.190	3.600	3.300	33	68	8-103169-2	△	△	3.290	.190	3.600	3.300	33	68	3-103169-2	
△	△	3.190	.190	3.500	3.200	32	66	8-103169-1	△	△	3.190	.190	3.500	3.200	32	66	3-103169-1	
△	△	3.090	.190	3.400	3.100	31	64	8-103169-0	△	△	3.090	.190	3.400	3.100	31	64	3-103169-0	
△	△	2.990	.190	3.300	3.000	30	62	7-103169-9	△	△	2.990	.190	3.300	3.000	30	62	2-103169-9	
△	△	2.890	.190	3.200	2.900	29	60	7-103169-8	△	△	2.890	.190	3.200	2.900	29	60	2-103169-8	
△	△	2.790	.190	3.100	2.800	28	58	7-103169-7	△	△	2.790	.190	3.100	2.800	28	58	2-103169-7	
△	△	2.690	.190	3.000	2.700	27	56	7-103169-6	△	△	2.690	.190	3.000	2.700	27	56	2-103169-6	
△	△	2.590	.190	2.900	2.600	26	54	7-103169-5	△	△	2.590	.190	2.900	2.600	26	54	2-103169-5	
△	△	2.490	.190	2.800	2.500	25	52	7-103169-4	△	△	2.490	.190	2.800	2.500	25	52	2-103169-4	
△	△	2.390	.190	2.700	2.400	24	50	7-103169-3	△	△	2.390	.190	2.700	2.400	24	50	2-103169-3	
△	△	2.290	.190	2.600	2.300	23	48	7-103169-2	△	△	2.290	.190	2.600	2.300	23	48	2-103169-2	
△	△	2.190	.190	2.500	2.200	22	46	7-103169-1	△	△	2.190	.190	2.500	2.200	22	46	2-103169-1	
△	△	2.090	.190	2.400	2.100	21	44	7-103169-0	△	△	2.090	.190	2.400	2.100	21	44	2-103169-0	
△	△	1.990	.190	2.300	2.000	20	42	6-103169-9	△	△	1.990	.190	2.300	2.000	20	42	1-103169-9	
△	△	1.890	.190	2.200	1.900	19	40	6-103169-8	△	△	1.890	.190	2.200	1.900	19	40	1-103169-8	
△	△	1.790	.190	2.100	1.800	18	38	6-103169-7	△	△	1.790	.190	2.100	1.800	18	38	1-103169-7	
△	△	1.690	.190	2.000	1.700	17	36	6-103169-6	△	△	1.690	.190	2.000	1.700	17	36	1-103169-6	
△	△	1.590	.190	1.900	1.600	16	34	6-103169-5	△	△	1.590	.190	1.900	1.600	16	34	1-103169-5	
△	△	1.490	.190	1.800	1.500	15	32	6-103169-4	△	△	1.490	.190	1.800	1.500	15	32	1-103169-4	
△	△	1.390	.190	1.700	1.400	14	30	6-103169-3	△	△	1.390	.190	1.700	1.400	14	30	1-103169-3	
△	△	1.290	.190	1.600	1.300	13	28	6-103169-2	△	△	1.290	.190	1.600	1.300	13	28	1-103169-2	
△	△	1.190	.190	1.500	1.200	12	26	6-103169-1	△	△	1.190	.190	1.500	1.200	12	26	1-103169-1	
△	△	1.090	.190	1.400	1.100	11	24	6-103169-0	△	△	1.090	.190	1.400	1.100	11	24	1-103169-0	
△	△	.990	.190	1.300	1.000	10	22	5-103169-9	△	△	.990	.190	1.300	1.000	10	22	103169-9	
△	△	.890	.190	1.200	.900	9	20	5-103169-8	△	△	.890	.190	1.200	.900	9	20	103169-8	
△	△	.790	.190	1.100	.800	8	18	5-103169-7	△	△	.790	.190	1.100	.800	8	18	103169-7	
△	△	.690	.190	1.000	.700	7	16	5-103169-6	△	△	.690	.190	1.000	.700	7	16	103169-6	
△	△	.590	.190	.900	.600	6	14	5-103169-5	△	△	.590	.190	.900	.600	6	14	103169-5	
△	△	.490	.190	.800	.500	5	12	5-103169-4	△	△	.490	.190	.800	.500	5	12	103169-4	
△	△	.390	.190	.700	.400	4	10	5-103169-3	△	△	.390	.190	.700	.400	4	10	103169-3	
△	△	.290	.190	.600	.300	3	8	5-103169-2	△	△	.290	.190	.600	.300	3	8	103169-2	
△	△	.190	.190	.500	.200	2	6	5-103169-1	△	△	.190	.190	.500	.200	2	6	103169-1	

PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. SEE INSTRUCTIONS ON REVISIONS.

TE Connectivity

HDR ASSY, MOD II, SHROUDED, 4 SDCS, DBL ROW, VERTICAL, .100X.100 C/L, WITH .0025 SD POSTS

DATE: 11/07/99

REV: 1

REVISED PER ECU-11-004587