
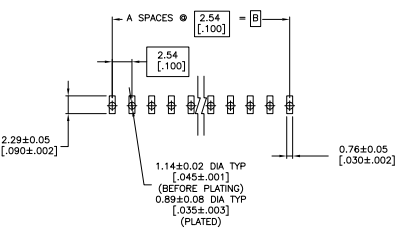


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 0.00254-0.00504 [0.00100-0.00200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.
 - PARTS PACKAGED IN TUBES.
 - HOUSING: LCP, COLOR-BLACK, POSTS: PHOSPHOR BRONZE.
 - 0.00254-0.00504 [0.00100-0.00200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [0.00050] NICKEL.
 - OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

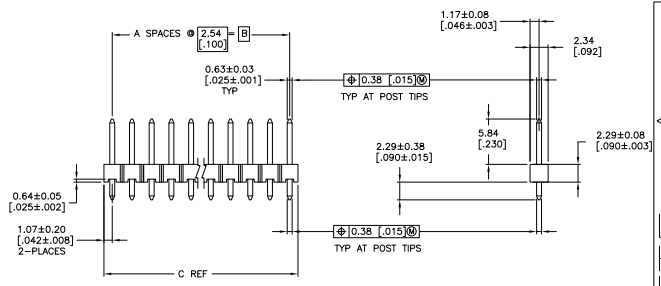

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [3.05] STENCIL THICK.

PLATING	B	A	NO. OF POSITIONS	PART NUMBER	
△	7.21	5.08	2	3	9-146282-1
△	10.13	8.96	39	40	9-146282-0
△	3.98	3.00	38	39	8-146282-9
△	98.65	96.52	38	39	8-146282-8
△	95.11	93.98	37	38	8-146282-7
△	93.57	91.44	36	37	8-146282-7
△	91.03	89.90	35	36	8-146282-6
△	3.584	3.500	34	36	8-146282-6
△	88.49	86.36	34	36	8-146282-5
△	3.424	3.400	34	36	8-146282-4
△	85.95	83.82	33	34	8-146282-4
△	83.41	81.28	32	33	8-146282-3
△	81.87	79.74	31	32	8-146282-2
△	80.33	78.20	30	31	8-146282-1
△	3.084	3.000	29	30	8-146282-0
△	78.79	76.66	29	30	8-146282-0
△	2.924	2.900	28	29	7-146282-9
△	2.884	2.800	28	29	7-146282-9
△	77.25	75.12	27	28	7-146282-8
△	75.71	73.58	26	27	7-146282-7
△	74.17	72.04	25	26	7-146282-6
△	72.63	70.50	24	25	7-146282-5
△	71.09	68.96	23	24	7-146282-4
△	69.55	67.42	23	24	7-146282-4
△	68.01	65.88	22	23	7-146282-3
△	66.47	64.34	21	22	7-146282-2
△	64.93	62.80	20	21	7-146282-1
△	63.39	61.26	19	20	7-146282-0
△	61.85	59.72	18	19	7-146282-0
△	60.31	58.18	17	18	6-146282-8
△	58.77	56.64	16	17	6-146282-7
△	57.23	55.10	16	17	6-146282-6
△	55.69	53.56	14	16	6-146282-6
△	54.15	52.02	13	14	6-146282-4
△	52.61	50.48	12	13	6-146282-3
△	51.07	48.94	11	12	6-146282-2
△	49.53	47.40	10	11	6-146282-1
△	47.99	45.86	9	10	6-146282-0
△	46.45	44.32	8	9	5-146282-9
△	44.91	42.78	7	8	5-146282-8
△	43.37	41.24	6	7	5-146282-7
△	41.83	39.70	5	6	5-146282-6
△	40.29	38.16	4	5	5-146282-5
△	38.75	36.62	3	4	5-146282-4
△	37.21	35.08	2	3	5-146282-3
△	35.67	33.54	1	2	5-146282-2
△	34.13	32.00	0	1	5-146282-1

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
△	7.21	5.08	2	3	4-146282-1
△	10.13	8.96	39	40	4-146282-0
△	3.98	3.00	38	39	3-146282-9
△	98.65	96.52	38	39	3-146282-8
△	95.11	93.98	37	38	3-146282-7
△	93.57	91.44	36	37	3-146282-7
△	91.03	89.90	35	36	3-146282-6
△	3.584	3.500	34	36	3-146282-6
△	88.49	86.36	34	36	3-146282-5
△	3.424	3.400	34	36	3-146282-4
△	85.95	83.82	33	34	3-146282-4
△	83.41	81.28	32	33	3-146282-3
△	81.87	79.74	31	32	3-146282-2
△	80.33	78.20	30	31	3-146282-1
△	3.084	3.000	29	30	3-146282-0
△	78.79	76.66	28	29	3-146282-0
△	2.924	2.900	28	29	2-146282-9
△	2.884	2.800	28	29	2-146282-9
△	77.25	75.12	27	28	2-146282-8
△	75.71	73.58	26	27	2-146282-7
△	74.17	72.04	25	26	2-146282-6
△	72.63	70.50	24	25	2-146282-5
△	71.09	68.96	23	24	2-146282-4
△	69.55	67.42	23	24	2-146282-3
△	68.01	65.88	22	23	2-146282-2
△	66.47	64.34	21	22	2-146282-1
△	64.93	62.80	20	21	2-146282-0
△	63.39	61.26	19	20	2-146282-0
△	61.85	59.72	18	19	1-146282-9
△	60.31	58.18	17	18	1-146282-8
△	58.77	56.64	16	17	1-146282-7
△	57.23	55.10	16	17	1-146282-6
△	55.69	53.56	14	16	1-146282-6
△	54.15	52.02	13	14	1-146282-4
△	52.61	50.48	12	13	1-146282-3
△	51.07	48.94	11	12	1-146282-2
△	49.53	47.40	10	11	1-146282-1
△	47.99	45.86	9	10	1-146282-0
△	46.45	44.32	8	9	1-146282-9
△	44.91	42.78	7	8	1-146282-8
△	43.37	41.24	6	7	1-146282-7
△	41.83	39.70	5	6	1-146282-6
△	40.29	38.16	4	5	1-146282-5
△	38.75	36.62	3	4	1-146282-4
△	37.21	35.08	2	3	1-146282-3
△	35.67	33.54	1	2	1-146282-2
△	34.13	32.00	0	1	1-146282-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 12 JUN 87

INCHES (mm) DIMENSIONS: 1/16 (0.0625) 1/8 (0.125) 3/16 (0.1875) 1/4 (0.25) 5/16 (0.3125) 3/8 (0.375) 1/2 (0.5) 5/8 (0.625) 3/4 (0.75) 7/8 (0.875) 1 (1.0) 1 1/8 (1.125) 1 1/4 (1.25) 1 3/4 (1.5) 2 (2.0) 2 1/4 (2.5) 3 (3.0) 4 (4.0) 5 (5.0) 6 (6.0) 8 (8.0) 10 (10.0) 12 (12.0) 15 (15.0) 20 (20.0) 25 (25.0) 30 (30.0) 40 (40.0) 50 (50.0) 60 (60.0) 75 (75.0) 100 (100.0)

DATE: 100779 (G) 146282

CUSTOMER DRAWING