
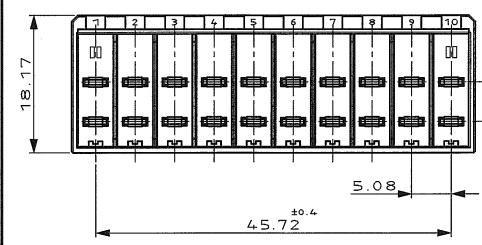


NUMBER 316517
 PROJ NO. 935-623
 PRINT DIST
 AMP-J
 REV.10/93

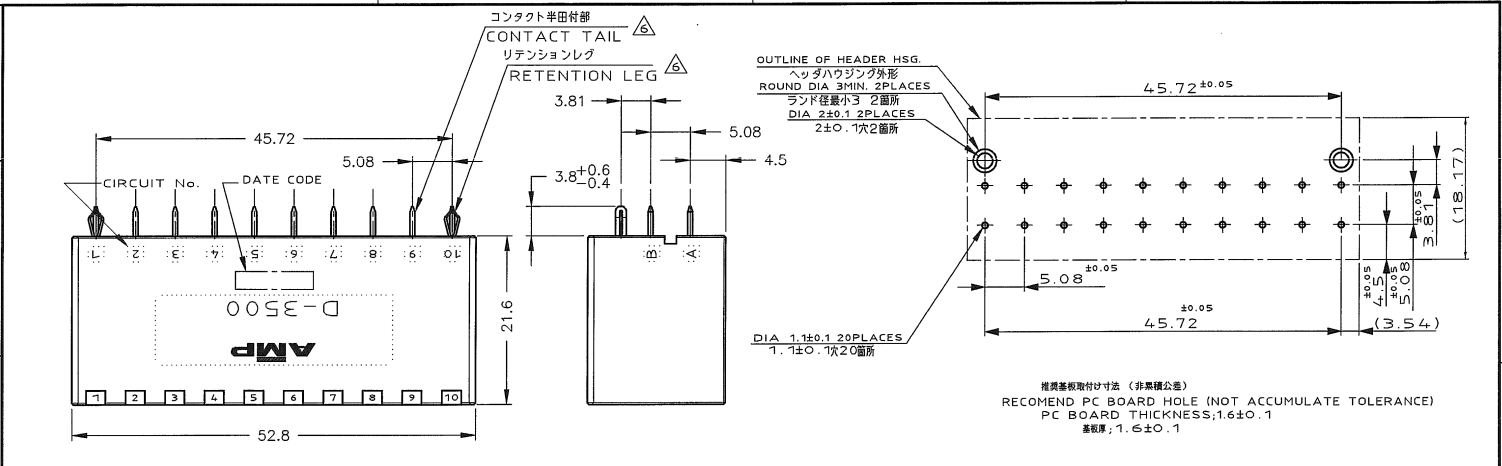

NOTES

- MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC, UL94V-0
 CONTACT: COPPER ALLOY
 RETENTION LEG: COPPER ALLOY
- FINISH (CONTACT AREA): 0.38μm MIN GOLD PLATING OVER Ni PLATING
- FINISH (CONTACT AREA): 0.76μm MIN GOLD PLATING OVER Ni PLATING
- FINISH (CONTACT AREA): 2.0 μm MIN TIN PLATED OVER NICKEL
- FINISH (RETENTION LEG): TIN LEAD PLATED (CONTACT TAIL) OVER NICKEL
- FINISH (RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

注記

- 材料: ハウジング: ガラス入り熱可塑性樹脂, UL94V-0
 コンタクト: 銅合金
 リテンションレグ: 銅合金
- めっき: コンタクト接触部: ニッケル下地の上記
 めっき厚: 0.38μm MIN
- めっき: コンタクト接触部: ニッケル下地の上記
 めっき厚: 0.76μm MIN
- めっき: コンタクト: 全面 Ni 下地
 接触部: 2.0 μm MIN スズめっき
- めっき: リテンションレグとコンタクト半田付部
 ニッケル下地の上記半田めっき
 めっき厚: 0.38μm MIN

△	△	-5
△	△	-3
△	△	316517-2
FINISH	仕様	PART NUMBER

Copyright ©1995 # AMP (Japan) LTD. ALL RIGHTS RESERVED.		Copyright ©1995 AMP (Japan) LTD. ALL RIGHTS RESERVED.		Tyco Electronics AMP K.K. Kawasaki, Japan	
WIRE RANGE		INSULATION DIA		NAME	
mm7(AWG)		mm/INCH		DYNAMIC(D-3500) 20 POS. V HDR. ASS'Y	
MATERIAL (SEE NOTE)		FINISH (SEE NOTE)		(GENERAL TOLERANCE) 100% ±0.35 100% ±0.4 100% ±0.45 100% ±0.3	
REVISED (FJD0-0039-03) T S J M		REVISED (FJD0-0114-03) T S M		A3 J 2/1 REV. B SHEET 1 OF 1	
RELEASED FJ00-3261-95 NM Y I		DR. N.MATSUBARA		24 OCT 95 DE. N.MATSUBARA 24 OCT 95 APP. S.MANABE	
LTR 変更 (REVISION RECORD) DR CHK DATE		CHK. Y.ISHIKAWA		24 OCT 95 24 OCT 95	

(CUSTOMER DRAWING) 顧客用図面