

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISED PER		DATE	BY	APPD
AD	00	H2	EC0-11-004587	11MAR11	RK	HMR

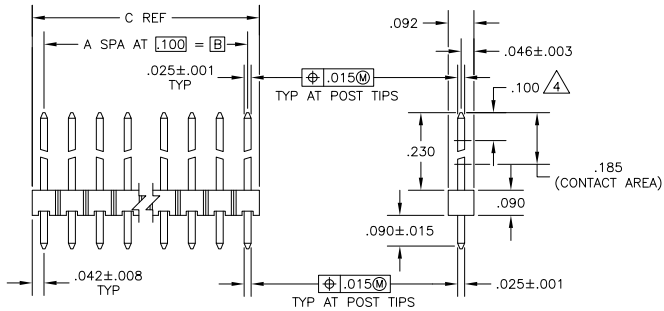

RECOMMENDED HOLE LAYOUT

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 3 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 4 .000030 GOLD ON THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 5 PARTS PACKAGED IN SINGLE TUBES.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DESCRIPTION	DATE	BY	APPD
1	3.984 3.900 39 40	4-103747-0		
2	3.884 3.800 38 39	3-103747-1		
3	3.784 3.700 37 38	3-103747-2		
4	3.684 3.600 36 37	3-103747-3		
5	3.584 3.500 35 36	3-103747-4		
6	3.484 3.400 34 35	3-103747-5		
7	3.384 3.300 33 34	3-103747-6		
8	3.284 3.200 32 33	3-103747-7		
9	3.184 3.100 31 32	3-103747-8		
10	3.084 3.000 30 31	3-103747-9		
11	2.984 2.900 29 30	3-103747-10		
12	2.884 2.800 28 29	3-103747-11		
13	2.784 2.700 27 28	3-103747-12		
14	2.684 2.600 26 27	3-103747-13		
15	2.584 2.500 25 26	3-103747-14		
16	2.484 2.400 24 25	3-103747-15		
17	2.384 2.300 23 24	3-103747-16		
18	2.284 2.200 22 23	3-103747-17		
19	2.184 2.100 21 22	3-103747-18		
20	2.084 2.000 20 21	3-103747-19		
21	1.984 1.900 19 20	3-103747-20		
22	1.884 1.800 18 19	3-103747-21		
23	1.784 1.700 17 18	3-103747-22		
24	1.684 1.600 16 17	3-103747-23		
25	1.584 1.500 15 16	3-103747-24		
26	1.484 1.400 14 15	3-103747-25		
27	1.384 1.300 13 14	3-103747-26		
28	1.284 1.200 12 13	3-103747-27		
29	1.184 1.100 11 12	3-103747-28		
30	1.084 1.000 10 11	3-103747-29		
31	.984 .900 9 10	3-103747-30		
32	.884 .800 8 9	3-103747-31		
33	.784 .700 7 8	3-103747-32		
34	.684 .600 6 7	3-103747-33		
35	.584 .500 5 6	3-103747-34		
36	.484 .400 4 5	3-103747-35		
37	.384 .300 3 4	3-103747-36		
38	.284 .200 2 3	3-103747-37		
39	.184 .100 1 2	3-103747-38		
40	.084 - - 1	3-103747-39		

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM: L.D.RINGLY 7-24-85
 OK: R. ELICKER 7-24-85
 APPD: R. ELICKER 7-24-85
 PRODUCT SPEC: -
 APPLICATION SPEC: -
 WEIGHT: -
 FINISH: -
 MATERIAL: HD50MG/PA6E
 RESISTANT THERMOPLASTIC
 COLOR-BLACK
 POSTS: HIPS/BRONZE

TE Connectivity
 ASSEMBLY, MOD II, HEADER,
 BREAKAWAY, SINGLE ROW, .100 CL
 VERTICAL, WITH .025 SQ POSTS

SIZE: A2
 CASE CODE: 103747
 SCALE: 4:1
 SHEET: 1 of 1
 REV: H2