THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - By - ALL RIGHTS RESERVED

LOC	DIST
AD	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

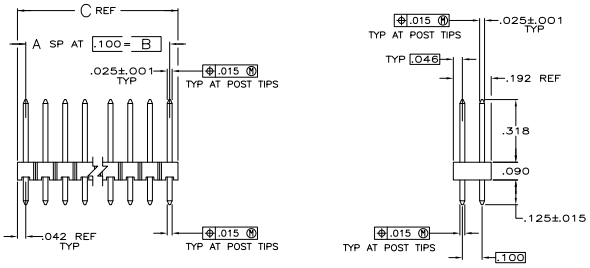

1. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
2. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
3. .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
4. .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
5. PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
6. HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

	1.684	1.600	16	34	4-103322-7
	1.184	1.100	11	24	4-103322-6
	.584	.500	5	12	4-103322-5
OBSOLETE	.284	.200	2	6	4-103322-4
	.084	—	—	2	4-103322-3
	3.984	3.900	39	80	4-103322-2
	.484	.400	4	10	4-103322-1
	3.984	3.900	39	80	4-103322-0
OBSOLETE	3.884	3.800	38	78	3-103322-9
OBSOLETE	3.784	3.700	37	76	3-103322-8
OBSOLETE	3.684	3.600	36	74	3-103322-7
SUPERSEDED BY 8-146250-8	3.584	3.500	35	72	3-103322-6
OBSOLETE	3.484	3.400	34	70	3-103322-5
OBSOLETE	3.384	3.300	33	68	3-103322-4
OBSOLETE	3.284	3.200	32	66	3-103322-3
OBSOLETE	3.184	3.100	31	64	3-103322-2
OBSOLETE	3.084	3.000	30	62	3-103322-1
OBSOLETE	2.984	2.900	29	60	3-103322-0
OBSOLETE	2.884	2.800	28	58	2-103322-9
OBSOLETE	2.784	2.700	27	56	2-103322-8
OBSOLETE	2.684	2.600	26	54	2-103322-7
OBSOLETE	2.584	2.500	25	52	2-103322-6
	2.484	2.400	24	50	2-103322-5
OBSOLETE	2.384	2.300	23	48	2-103322-4
OBSOLETE	2.284	2.200	22	46	2-103322-3
OBSOLETE	2.184	2.100	21	44	2-103322-2
OBSOLETE	2.084	2.000	20	42	2-103322-1
SUPERSEDED BY 7-146250-0	1.984	1.900	19	40	2-103322-0
OBSOLETE	1.884	1.800	18	38	1-103322-9
OBSOLETE	1.784	1.700	17	36	1-103322-8
OBSOLETE	1.684	1.600	16	34	1-103322-7
OBSOLETE	1.584	1.500	15	32	1-103322-6
OBSOLETE	1.484	1.400	14	30	1-103322-5
OBSOLETE	1.384	1.300	13	28	1-103322-4
OBSOLETE	1.284	1.200	12	26	1-103322-3
OBSOLETE	1.184	1.100	11	24	1-103322-2
OBSOLETE	1.084	1.000	10	22	1-103322-1
SUPERSEDED BY 6-146250-9	.984	.900	9	20	1-103322-0
OBSOLETE	.884	.800	8	18	103322-9
OBSOLETE	.784	.700	7	16	103322-8
	.684	.600	6	14	103322-7
	.584	.500	5	12	103322-6
	.484	.400	4	10	103322-5
	.384	.300	3	8	103322-4
	.284	.200	2	6	103322-3
	.184	.100	1	4	103322-2
SUPERSEDED BY 5-146250-1	.084	—	—	2	103322-1
PLATING	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
TOLERANCES UNLESS SPECIFIED: 0 PLC ±.- 1 PLC ±.- 2 PLC ±.- 3 PLC ±.005 4 PLC ±.- ANGLES ±.-
MATERIAL: PHOSPHOR BRONZE
FINISH: SEE TABLE

DRN: J MARTINELLI 15OCT98
CHK: JOHN KNITTLE 23NOV98
APVD: R FLINCHBAUGH 23NOV98
PRODUCT SPEC: —
APPLICATION SPEC: —
WEIGHT: —

TE Connectivity

NAME: ASSEMBLY, HEADER, BREAKAWAY, MOD II, DOUBLE ROW, .100 X .100 C/L, VERTICAL WITH .025 SQUARE POSTS

SIZE: A1 | CAGE CODE: 00779 | DRAWING NO: C-103322 | RESTRICTED TO: —

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV K2

4805 (3/11)

Downloaded from Elcodis.com electronic components distributor