



THIS DRAWING IS UNAPPROVED FOR PRODUCTION ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00		REVISED PER ECD-11-004587			

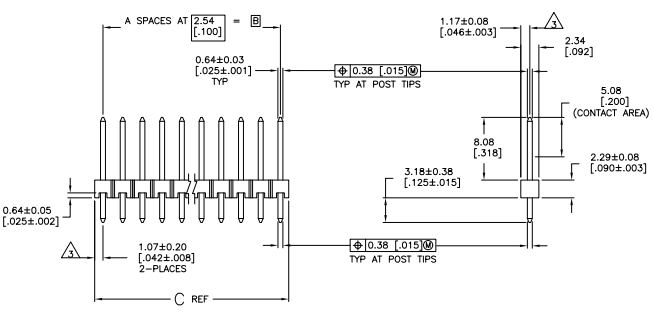

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
  - △ MATERIAL: HOUSING - LCP, COLOR: BLACK. POSTS - PHOSPHOR BRONZE
  - △ 0.00076 [.000030] GOLD IN CONTACT AREA, 0.00254-0.00508 [.0000100-.0000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
  - △ 0.00076 [.000030] GOLD IN CONTACT AREA, 0.00254-0.00508 [.0000100-.0000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
  - △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REV	DATE	DESCRIPTION	BY	CHK	APP	
△		101.19	99.06	39	40	9-146277-0
△		98.65	96.52			
△		96.11	93.98	37	38	8-146277-8
△		93.57	91.44	36	37	8-146277-7
△		91.03	88.90	35	36	8-146277-6
△		88.49	86.36	34	35	8-146277-5
△		85.95	83.82	33	34	8-146277-4
△		83.41	81.28	32	33	8-146277-3
△		80.87	78.74	31	32	8-146277-2
△		78.33	76.20	30	31	8-146277-1
△		75.79	73.66	29	30	8-146277-0
△		73.25	71.12	28	29	7-146277-9
△		70.71	68.58	27	28	7-146277-8
△		68.17	66.04	26	27	7-146277-7
△		65.63	63.50	25	26	7-146277-6
△		63.09	60.96	24	25	7-146277-5
△		60.55	58.43	23	24	7-146277-4
△		58.01	55.88	22	23	7-146277-3
△		55.47	53.34	21	22	7-146277-2
△		52.93	50.80	20	21	7-146277-1
△		50.39	48.26	19	20	7-146277-0
△		47.85	45.72	18	19	6-146277-9
△		45.31	43.18	17	18	6-146277-8
△		42.77	40.64	16	17	6-146277-7
△		40.23	38.10	15	16	6-146277-6
△		37.69	35.56	14	15	6-146277-5
△		35.15	33.02	13	14	6-146277-4
△		32.61	30.48	12	13	6-146277-3
△		30.07	27.94	11	12	6-146277-2
△		27.53	25.40	10	11	6-146277-1
△		24.99	22.86	9	10	6-146277-0
△		22.45	20.32	8	9	5-146277-9
△		19.91	17.78	7	8	5-146277-8
△		17.37	15.24	6	7	5-146277-7
△		14.83	12.70	5	6	5-146277-6
△		12.29	10.16	4	5	5-146277-5
△		9.75	7.62	3	4	5-146277-4
△		7.21	5.08	2	3	5-146277-3
△		4.67	2.54	1	2	5-146277-2
△		2.13	-	0	1	5-146277-1

REV	DATE	DESCRIPTION	BY	CHK	APP	
△		101.19	99.06	39	40	4-146277-0
△		98.65	96.52			
△		96.11	93.98	37	38	3-146277-8
△		93.57	91.44	36	37	3-146277-7
△		91.03	88.90	35	36	3-146277-6
△		88.49	86.36	34	35	3-146277-5
△		85.95	83.82	33	34	3-146277-4
△		83.41	81.28	32	33	3-146277-3
△		80.87	78.74	31	32	3-146277-2
△		78.33	76.20	30	31	3-146277-1
△		75.79	73.66	29	30	3-146277-0
△		73.25	71.12	28	29	2-146277-9
△		70.71	68.58	27	28	2-146277-8
△		68.17	66.04	26	27	2-146277-7
△		65.63	63.50	25	26	2-146277-6
△		63.09	60.96	24	25	2-146277-5
△		60.55	58.43	23	24	2-146277-4
△		58.01	55.88	22	23	2-146277-3
△		55.47	53.34	21	22	2-146277-2
△		52.93	50.80	20	21	2-146277-1
△		50.39	48.26	19	20	2-146277-0
△		47.85	45.72	18	19	1-146277-9
△		45.31	43.18	17	18	1-146277-8
△		42.77	40.64	16	17	1-146277-7
△		40.23	38.10	15	16	1-146277-6
△		37.69	35.56	14	15	1-146277-5
△		35.15	33.02	13	14	1-146277-4
△		32.61	30.48	12	13	1-146277-3
△		30.07	27.94	11	12	1-146277-2
△		27.53	25.40	10	11	1-146277-1
△		24.99	22.86	9	10	1-146277-0
△		22.45	20.32	8	9	146277-9
△		19.91	17.78	7	8	146277-8
△		17.37	15.24	6	7	146277-7
△		14.83	12.70	5	6	146277-6
△		12.29	10.16	4	5	146277-5
△		9.75	7.62	3	4	146277-4
△		7.21	5.08	2	3	146277-3
△		4.67	2.54	1	2	146277-2
△		2.13	-	0	1	146277-1

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. UNAUTHORIZED REPRODUCTION OR DISTRIBUTION IS PROHIBITED.

TE Connectivity  
 HEADLINE ASSEMBLY, WOOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL W/O/SR POSTS

REVISED PER ECD-11-004587

DATE: 4/11/07