



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.


LOC		DISTR		REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD		
H2		REVISED PER ECO-11-004587	11MAR11	RK	HMR		



- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
 - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
 5 PART INDICATED IS PACKAGED IN "SINGLE TUBES"
 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

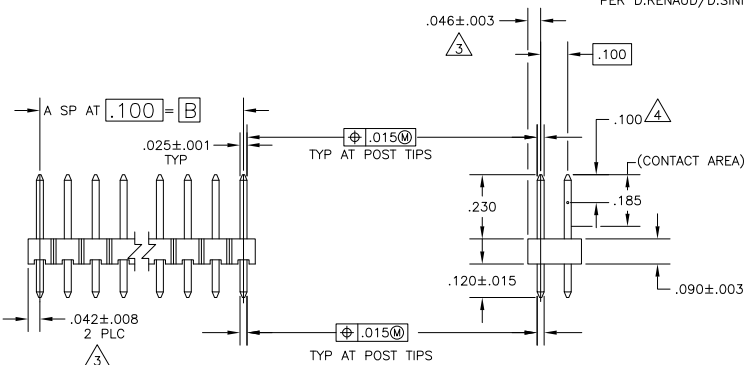

REVISIONS	DESCRIPTION	DATE	BY	APPD	
6	OBSOLETE	1.284	1.200	12 26	4-103186-1
6	OBSOLETE	3.984	3.900	39 80	4-103186-0
6	OBSOLETE	3.884	3.800	38 78	3-103186-9
6	OBSOLETE	3.784	3.700	37 76	3-103186-8
6	OBSOLETE	3.684	3.600	36 74	3-103186-7
6	OBSOLETE	3.584	3.500	35 72	3-103186-6
6	OBSOLETE	3.484	3.400	34 70	3-103186-5
6	OBSOLETE	3.384	3.300	33 68	3-103186-4
6	OBSOLETE	3.284	3.200	32 66	3-103186-3
6	OBSOLETE	3.184	3.100	31 64	3-103186-2
6	OBSOLETE	3.084	3.000	30 62	3-103186-1
6	SUPERSEDED BY B-146256-0	2.984	2.900	29 60	3-103186-0
6	OBSOLETE	2.884	2.800	28 58	2-103186-9
6	OBSOLETE	2.784	2.700	27 56	2-103186-8
6	OBSOLETE	2.684	2.600	26 54	2-103186-7
6	OBSOLETE	2.584	2.500	25 52	2-103186-6
6	OBSOLETE	2.484	2.400	24 50	2-103186-5
6	OBSOLETE	2.384	2.300	23 48	2-103186-4
6	OBSOLETE	2.284	2.200	22 46	2-103186-3
6	OBSOLETE	2.184	2.100	21 44	2-103186-2
6	OBSOLETE	2.084	2.000	20 42	2-103186-1
6	OBSOLETE	1.984	1.900	19 40	2-103186-0
6	OBSOLETE	1.884	1.800	18 38	1-103186-9
6	OBSOLETE	1.784	1.700	17 36	1-103186-8
6	OBSOLETE	1.684	1.600	16 34	1-103186-7
6	OBSOLETE	1.584	1.500	15 32	1-103186-6
6	OBSOLETE	1.484	1.400	14 30	1-103186-5
6	OBSOLETE	1.384	1.300	13 28	1-103186-4
6	OBSOLETE	1.284	1.200	12 26	1-103186-3
6	OBSOLETE	1.184	1.100	11 24	1-103186-2
6	OBSOLETE	1.084	1.000	10 22	1-103186-1
		.984	.900	9 20	1-103186-0
		.884	.800	8 18	103186-9
		.784	.700	7 16	103186-8
		.684	.600	6 14	103186-7
		.584	.500	5 12	103186-6
		.484	.400	4 10	103186-5
		.384	.300	3 8	103186-4
		.284	.200	2 6	103186-3
		.184	.100	1 4	103186-2
		.084	---	---	103186-1



RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIMENSIONS: INCHES 0 PLC ± . - 1 PLC ± . - 2 PLC ± .005 3 PLC ± .005 4 PLC ± . - ANGLES: ° - - MATERIAL: ALUMINUM FINISH: ANODIZED TYPICAL FINISH: 1000-10000 AAS ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED		DIM: H. MOLL 130C187 CHK: T. CLARK 200C187 APD: T. CLARK 200C187 PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: - CUSTOMER DRAWING		TE TE Connectivity HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 €, VERTICAL, WITH .025 SQ POSTS SIZE: A2 CASE CODE: C=103186 SCALE: 4:1 SHEET: 1 of 1 REV: H2	
----------------------------------------	--	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--	---------------------------------------------------------------------------------------------------------------------------------------------------	--	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--

103186

A