


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 39					
L3		REVISED PER ECD-11-040587	11MMR11	RK	HMR

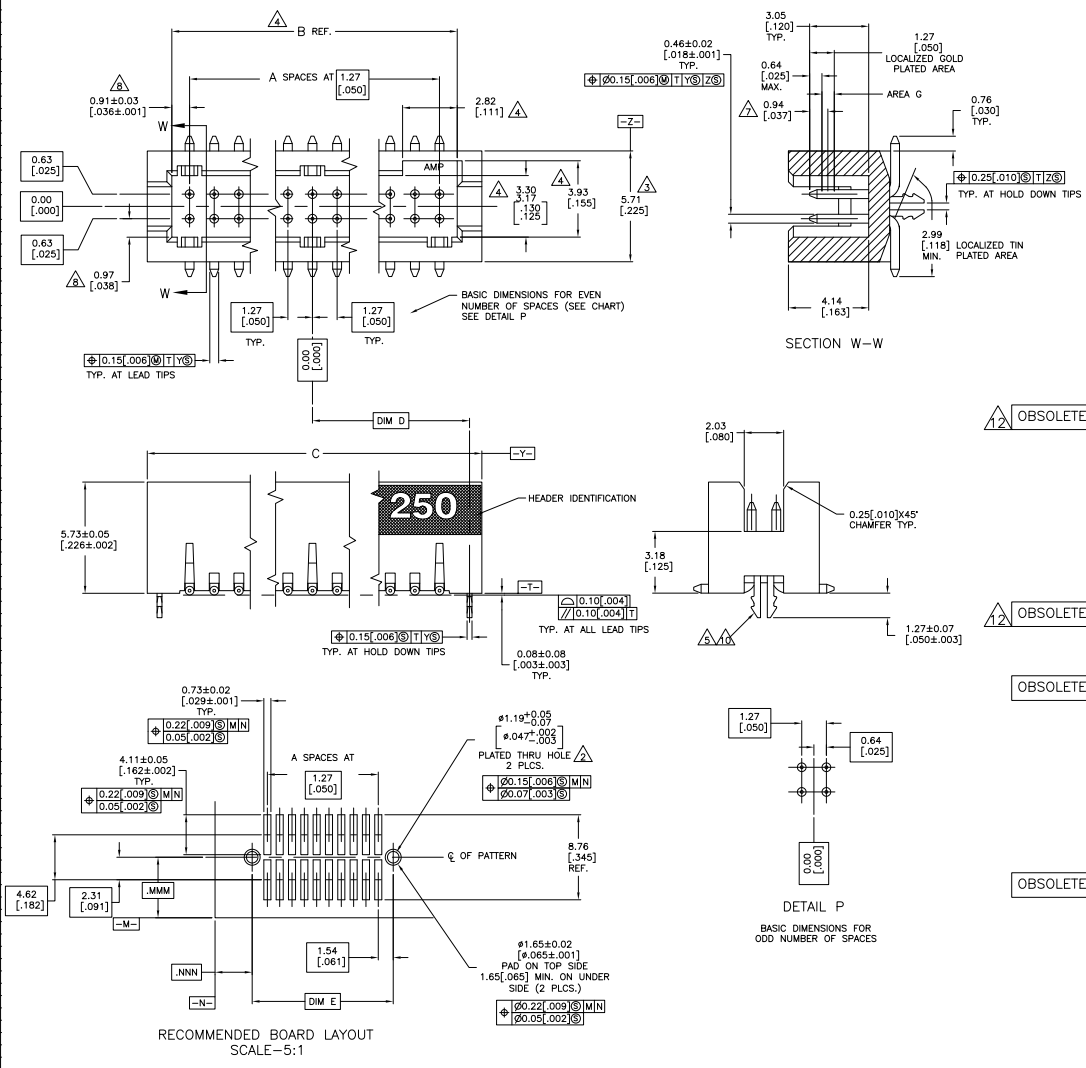

- ▲ 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END POINTS OF AREA G, (LOCALIZED GOLD PLATE AREA), 0.0038[.000150] TIN-LEAD ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL.
- ▲ USE 1.32±0.02 [1.052±.001] DRILLED HOLE (#55 DRILL), FINISH TO BE TIN OVER 0.02 [0.001] MIN COPPER.
- ▲ DIMENSION APPLIES AT BASE OF SHROUD.
- ▲ THE NOTED DIMENSIONS APPLY AT THE MATING FACE OF THE HOUSING.
- ▲ 0.0038 [0.000150] TIN-LEAD ON HOLD DOWN/ALL OVER 0.0013 [0.000050] NICKEL.
- 6. IF PLANNING TO USE MORE THAN ONE MATING PAIR OF CONNECTORS TO INTERCONNECT 2 BOARDS, PLEASE REFER TO THE SPACING PARAGRAPH IN APPLICATION SPEC, #114-7010
- ▲ POINT OF MEASUREMENT
- ▲ DIMENSIONS NOTED APPLY FROM THE BASIC DIMENSION LINE (NOT THE CIRCUIT CAVITY CENTER LINE) TO THE SURFACE INDICATED.
- ▲ 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END POINTS OF AREA G, (LOCALIZED GOLD PLATE AREA), 0.0038[.000150] TIN ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL.
- ▲ 0.0035[.000150] TIN ON HOLD/DOWN, ALL OVER 0.0013[.000050] NICKEL
- ▲ ROHS 2002/95/EC COMPLIANT.
- ▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

▲	65.33 [2.572]	32.66 [1.286]	66.59 [2.622]	64.05 [2.522]	49	100	▲	6-104655-1
▲	58.97 [2.322]	29.48 [1.161]	60.24 [2.372]	57.70 [2.272]	44	90	▲	6-104655-0
▲	52.63 [2.072]	26.31 [1.036]	53.89 [2.122]	51.35 [2.022]	39	80	▲	5-104655-9
▲	46.28 [1.822]	23.13 [0.911]	47.54 [1.872]	45.00 [1.772]	34	70	▲	5-104655-8
▲	39.93 [1.572]	19.96 [0.786]	41.19 [1.622]	38.65 [1.522]	29	60	▲	5-104655-7
▲	33.58 [1.322]	16.78 [0.661]	34.84 [1.372]	32.30 [1.272]	24	50	▲	5-104655-6
▲	27.23 [1.072]	13.61 [0.536]	28.49 [1.122]	25.95 [1.022]	19	40	▲	5-104655-5
▲	20.88 [0.822]	10.43 [0.411]	22.14 [0.872]	19.60 [0.772]	14	30	▲	5-104655-4
▲	14.53 [0.572]	7.26 [0.286]	15.79 [0.622]	13.25 [0.522]	9	20	▲	5-104655-3
▲	11.98 [0.472]	5.99 [0.236]	13.25 [0.522]	10.72 [0.422]	7	16	▲	5-104655-2
▲	8.18 [0.322]	4.08 [0.161]	9.44 [0.372]	6.90 [0.272]	4	10	▲	5-104655-1
OBsolete	65.33 [2.572]	32.66 [1.286]	66.59 [2.622]	64.05 [2.522]	49	100	▲	1-104655-1
OBsolete	58.97 [2.322]	29.48 [1.161]	60.24 [2.372]	57.70 [2.272]	44	90	▲	1-104655-0
OBsolete	52.63 [2.072]	26.31 [1.036]	53.89 [2.122]	51.35 [2.022]	39	80	▲	104655-9
OBsolete	46.28 [1.822]	23.13 [0.911]	47.54 [1.872]	45.00 [1.772]	34	70	▲	104655-8
OBsolete	39.93 [1.572]	19.96 [0.786]	41.19 [1.622]	38.65 [1.522]	29	60	▲	104655-7
OBsolete	33.58 [1.322]	16.78 [0.661]	34.84 [1.372]	32.30 [1.272]	24	50	▲	104655-6
OBsolete	27.23 [1.072]	13.61 [0.536]	28.49 [1.122]	25.95 [1.022]	19	40	▲	104655-5
OBsolete	20.88 [0.822]	10.43 [0.411]	22.14 [0.872]	19.60 [0.772]	14	30	▲	104655-4
OBsolete	14.53 [0.572]	7.26 [0.286]	15.79 [0.622]	13.25 [0.522]	9	20	▲	104655-3
OBsolete	11.98 [0.472]	5.99 [0.236]	13.25 [0.522]	10.72 [0.422]	7	16	▲	104655-2
OBsolete	8.18 [0.322]	4.08 [0.161]	9.44 [0.372]	6.90 [0.272]	4	10	▲	104655-1
FINISH	E	D	C	B	A	NUMBER OF POSITIONS		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. THE HELM (REV) DATE

INCHES: 100-1332
 METERS: 114-7010

DATE: 11-01-2011

SIZE: 10-1

TE Connectivity
 HEADER ASSEMBLY, SURFACE MOUNT, AMPMODU 50/50 GRID (6.35/250) MATED HEIGHT)

00779 G=104655