
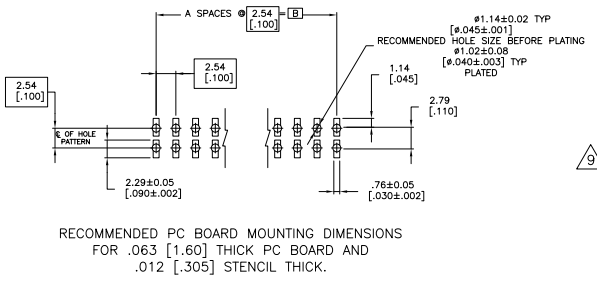


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00		REVISED PER ECD-11-004587			

- ASSEMBLY MAY BE BROUGHT TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- POST PLATING: 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD OVER 0.00127[.000050] NICKEL ENTIRE POST.
  - HOUSING: LCP, COLOR-BLACK.
  - POST MATERIAL: PHOSPHOR BRONZE.
  - .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST.
  - POST PLATING: 0.00254-0.00508[.000100-.000200] MATTE TIN OVER 0.00127[.000050] NICKEL ENTIRE POST.
  - OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI

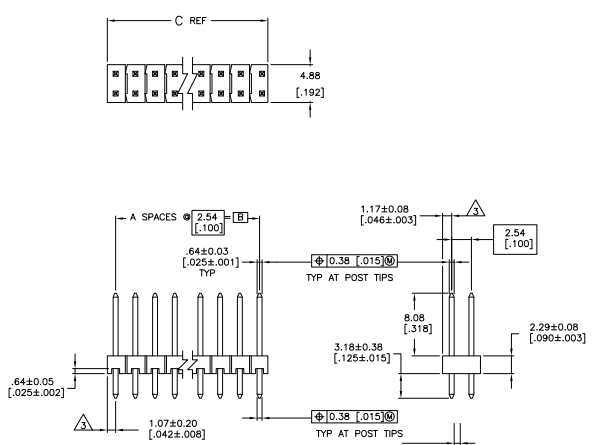

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
OBsolete	101.19	99.06	39	80	9-146250-0
OBsolete	98.65	96.52	38	78	8-146250-9
OBsolete	96.11	93.98	37	76	8-146250-8
OBsolete	93.57	91.44	36	74	8-146250-7
OBsolete	91.03	88.90	35	72	8-146250-6
OBsolete	88.49	86.36	34	70	8-146250-5
OBsolete	85.95	83.82	33	68	8-146250-4
OBsolete	83.41	81.28	32	66	8-146250-3
OBsolete	80.87	78.74	31	64	8-146250-2
OBsolete	78.33	76.20	30	62	8-146250-1
OBsolete	75.79	73.66	29	60	8-146250-0
OBsolete	73.25	71.12	28	58	7-146250-9
OBsolete	70.71	68.58	27	56	7-146250-8
OBsolete	68.17	66.04	26	54	7-146250-7
OBsolete	65.63	63.5	25	52	7-146250-6
OBsolete	63.09	60.96	24	50	7-146250-5
OBsolete	60.55	58.42	23	48	7-146250-4
OBsolete	58.01	55.88	22	46	7-146250-3
OBsolete	55.47	53.34	21	44	7-146250-2
OBsolete	52.93	50.80	20	42	7-146250-1
OBsolete	50.39	48.26	19	40	7-146250-0
OBsolete	47.85	45.72	18	38	6-146250-9
OBsolete	45.31	43.18	17	36	6-146250-8
OBsolete	42.77	40.64	16	34	6-146250-7
OBsolete	40.23	38.10	15	32	6-146250-6
OBsolete	37.69	35.56	14	30	6-146250-5
OBsolete	35.15	33.02	13	28	6-146250-4
OBsolete	32.61	30.48	12	26	6-146250-3
OBsolete	30.07	27.94	11	24	6-146250-2
OBsolete	27.53	25.40	10	22	6-146250-1
OBsolete	24.99	22.86	9	20	6-146250-0
OBsolete	22.45	20.32	8	18	5-146250-9
OBsolete	19.91	17.78	7	16	5-146250-8
OBsolete	17.37	15.24	6	14	5-146250-7
OBsolete	14.83	12.70	5	12	5-146250-6
OBsolete	12.29	10.16	4	10	5-146250-5
OBsolete	9.75	7.62	3	8	5-146250-4
OBsolete	7.21	5.08	2	6	5-146250-3
OBsolete	4.67	2.54	1	4	5-146250-2
OBsolete	2.13	0.00	0	2	5-146250-1

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
OBsolete	101.19	99.06	39	80	4-146250-0
OBsolete	98.65	96.52	38	78	3-146250-9
OBsolete	96.11	93.98	37	76	3-146250-8
OBsolete	93.57	91.44	36	74	3-146250-7
OBsolete	91.03	88.90	35	72	3-146250-6
OBsolete	88.49	86.36	34	70	3-146250-5
OBsolete	85.95	83.82	33	68	3-146250-4
OBsolete	83.41	81.28	32	66	3-146250-3
OBsolete	80.87	78.74	31	64	3-146250-2
OBsolete	78.33	76.20	30	62	3-146250-1
OBsolete	75.79	73.66	29	60	3-146250-0
OBsolete	73.25	71.12	28	58	2-146250-9
OBsolete	70.71	68.58	27	56	2-146250-8
OBsolete	68.17	66.04	26	54	2-146250-7
OBsolete	65.63	63.5	25	52	2-146250-6
OBsolete	63.09	60.96	24	50	2-146250-5
OBsolete	60.55	58.42	23	48	2-146250-4
OBsolete	58.01	55.88	22	46	2-146250-3
OBsolete	55.47	53.34	21	44	2-146250-2
OBsolete	52.93	50.80	20	42	2-146250-1
OBsolete	50.39	48.26	19	40	2-146250-0
OBsolete	47.85	45.72	18	38	1-146250-9
OBsolete	45.31	43.18	17	36	1-146250-8
OBsolete	42.77	40.64	16	34	1-146250-7
OBsolete	40.23	38.10	15	32	1-146250-6
OBsolete	37.69	35.56	14	30	1-146250-5
OBsolete	35.15	33.02	13	28	1-146250-4
OBsolete	32.61	30.48	12	26	1-146250-3
OBsolete	30.07	27.94	11	24	1-146250-2
OBsolete	27.53	25.40	10	22	1-146250-1
OBsolete	24.99	22.86	9	20	1-146250-0
OBsolete	22.45	20.32	8	18	146250-9
OBsolete	19.91	17.78	7	16	146250-8
OBsolete	17.37	15.24	6	14	146250-7
OBsolete	14.83	12.70	5	12	146250-6
OBsolete	12.29	10.16	4	10	146250-5
OBsolete	9.75	7.62	3	8	146250-4
OBsolete	7.21	5.08	2	6	146250-3
OBsolete	4.67	2.54	1	4	146250-2
OBsolete	2.13	0.00	0	2	146250-1

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

TE Connectivity  
 HEADERS ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, HIGH TEMPERATURE

SIZE: 4.1  
 PART NUMBER: 100779  
 REV: 1