
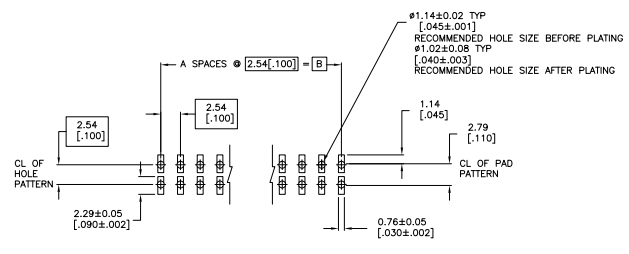
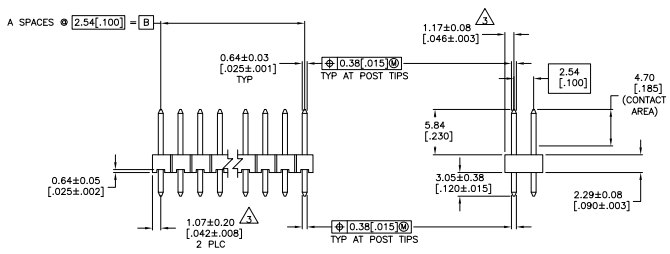


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- POST PLATING: 0.00762[.00030] GOLD ON CONTACT AREA,  
 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD ON SOLDERTAIL,  
 ALL OVER 0.00127[.000050] NICKEL.
- HOUSING: LCP, COLOR-BLACK.
- POST: PHOSPHOR BRONZE
- PARTS PACKAGED IN TUBES.
- POST PLATING: 0.00762[.00030] GOLD ON CONTACT AREA,  
 0.00254-0.00508[.000100-.000200] MATTE TIN ON SOLDERTAIL,  
 ALL OVER 0.00127[.000050] NICKEL.
- PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- OBsolete PARTS: OBsolete CIS STREAMLINING PER  
 D.RENAUD/D.SINIS



RECOMMENDED PC BOARD MOUNTING DIMENSIONS  
 FOR .063 [1.60] THICK PC BOARD AND  
 .012 [1.305] STENCIL THICK.

101.19	99.08	39	80	9-146257-0
98.65	96.52	38	78	8-146257-9
96.11	93.98	37	76	8-146257-8
93.57	91.44	36	74	8-146257-7
91.03	88.90	35	72	8-146257-6
88.49	86.36	34	70	8-146257-5
85.95	83.82	33	68	8-146257-4
83.41	81.28	32	66	8-146257-3
80.87	78.74	31	64	8-146257-2
78.33	76.20	30	62	8-146257-1
75.79	73.66	29	60	8-146257-0
73.25	71.12	28	58	7-146257-9
70.71	68.58	27	56	7-146257-8
68.17	66.04	26	54	7-146257-7
65.63	63.50	25	52	7-146257-6
63.09	60.96	24	50	7-146257-5
60.55	58.42	23	48	7-146257-4
58.01	55.88	22	46	7-146257-3
55.47	53.34	21	44	7-146257-2
52.93	50.80	20	42	7-146257-1
50.39	48.26	19	40	7-146257-0
47.85	45.72	18	38	6-146257-9
45.31	43.18	17	36	6-146257-8
42.77	40.64	16	34	6-146257-7
40.23	38.10	15	32	6-146257-6
37.69	35.56	14	30	6-146257-5
35.15	33.02	13	28	6-146257-4
32.61	30.48	12	26	6-146257-3
30.07	27.94	11	24	6-146257-2
27.53	25.40	10	22	6-146257-1
24.99	22.86	9	20	6-146257-0
22.45	20.32	8	18	5-146267-9
19.91	17.78	7	16	5-146257-8
17.37	15.24	6	14	5-146257-7
14.83	12.70	5	12	5-146257-6
12.29	10.16	4	10	5-146257-5
9.75	7.62	3	8	5-146257-4
7.21	5.08	2	6	5-146257-3
4.67	2.54	1	4	5-146257-2
2.13	0.00	0	2	5-146257-1

17.37	15.24	6	14	4-146257-6
9.75	7.62	3	8	4-146257-5
7.21	5.08	2	6	4-146257-4
4.67	2.54	1	4	4-146257-3
2.13	0.00	0	2	4-146257-2
101.19	99.08	39	80	4-146257-0
98.65	96.52	38	78	3-146257-9
96.11	93.98	37	76	3-146257-8
93.57	91.44	36	74	3-146257-7
91.03	88.90	35	72	3-146257-6
88.49	86.36	34	70	3-146257-5
85.95	83.82	33	68	3-146257-4
83.41	81.28	32	66	3-146257-3
80.87	78.74	31	64	3-146257-2
78.33	76.20	30	62	3-146257-1
75.79	73.66	29	60	3-146257-0
73.25	71.12	28	58	2-146257-9
70.71	68.58	27	56	2-146257-8
68.17	66.04	26	54	2-146257-7
65.63	63.50	25	52	2-146257-6
63.09	60.96	24	50	2-146257-5
60.55	58.42	23	48	2-146257-4
58.01	55.88	22	46	2-146257-3
55.47	53.34	21	44	2-146257-2
52.93	50.80	20	42	2-146257-1
50.39	48.26	19	40	2-146257-0
47.85	45.72	18	38	1-146267-9
45.31	43.18	17	36	1-146257-8
42.77	40.64	16	34	1-146257-7
40.23	38.10	15	32	1-146257-6
37.69	35.56	14	30	1-146257-5
35.15	33.02	13	28	1-146257-4
32.61	30.48	12	26	1-146257-3
30.07	27.94	11	24	1-146257-2
27.53	25.40	10	22	1-146257-1
24.99	22.86	9	20	1-146257-0
22.45	20.32	8	18	1-146267-9
19.91	17.78	7	16	146257-8
17.37	15.24	6	14	146257-7
14.83	12.70	5	12	146257-6
12.29	10.16	4	10	146257-5
9.75	7.62	3	8	146267-4
7.21	5.08	2	6	146257-3
4.67	2.54	1	4	146257-2
2.13	0.00	0	2	146257-1

THIS DRAWING IS A CONTROLLED DOCUMENT. IT IS THE PROPERTY OF TE CONNECTIVITY. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

TE Connectivity  
 TE CONNECTIVITY  
 TE CONNECTIVITY  
 TE CONNECTIVITY

HEADER ASSEMBLY, MOD II,  
 BREAKAWAY, DOUBLE ROW,  
 HIGH TEMPERATURE.

DATE: 00779G-146257  
 SIZE: 4:1  
 SHEET: 1 of 1  
 M2