
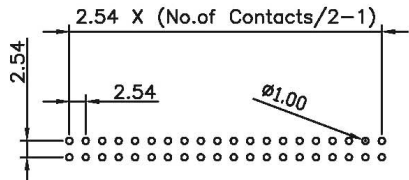


Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: PBT
 Underplate: Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u" Tin/Lead (Brighten Tin) or
 100u" Tin/Lead Free (Brighten Tin/Matte Tin)

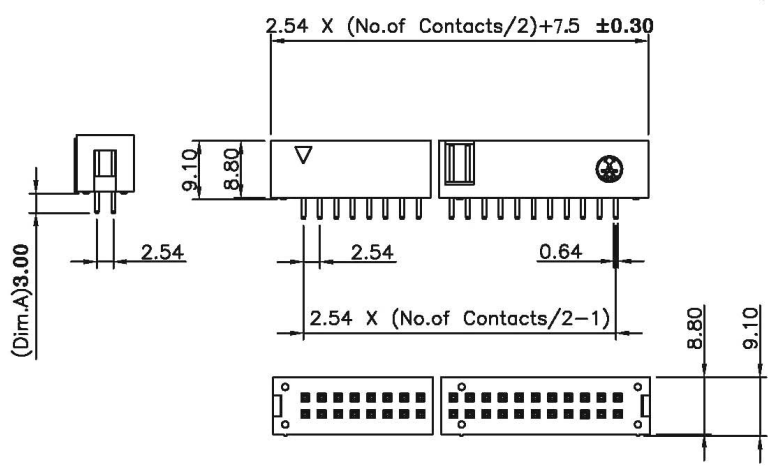

RENOMMENDED P.C.B LAYOUT
 TOLERANCES: $\pm 0.05\text{mm}$

AWHWxxG-0102-T-R
 30u" of Gold
 AWHWxxG-0202-T-R
 Flash Gold

UNLESS OTHERWISE SPECIFIED TOLERANCE		±0.2		
SCALE: AS SHOWN	UNIT: mm			
DRAWN	JOE	12/19/05	DRAWN NAME: BOX HEADER (PITHC: 2.54mm) 1/2	
CHECKED		/ /		
APPROVED		/ /	PRODUCT NO. AWHWxxG-0x02-T-R	
DATE	12/13/05	SIZE	A4	REV. A
DESCRIPTION			FILE NAME:	

REV.	A	ECN-0512106(Emily)	DATE	12/13/05
DESCRIPTION				