



PRODUCT NUMBER
SEE TABLE

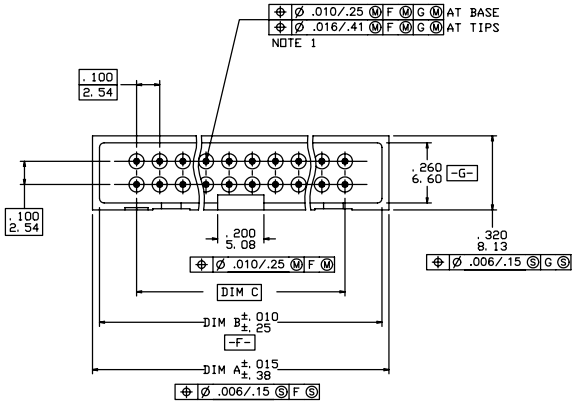


NOTE 1
 $\phi .010/.25$ F G AT BASE
 $\phi .016/.41$ F G AT TIPS




SECTION X-X


FDR 66506-254 THRU -279 AND -281 THRU -306 ONLY.



VIEW Z-Z

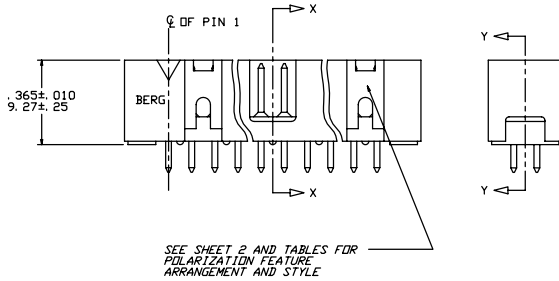

SEE SHEET 2 AND TABLES FOR
POLARIZATION FEATURE
ARRANGEMENT AND STYLE

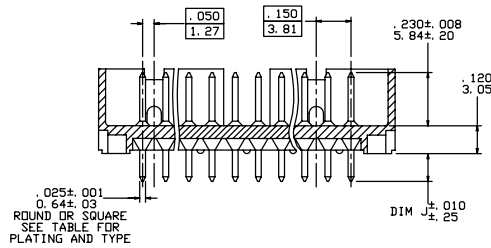

SECTION Y-Y


mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101	projection	product family QUICKIE						
lfr	ecn no	dr	date	tolerances unless otherwise specified	INCH/MM	title						
AD	V42013	LSS	1/25/95	linear	scale 1:1	HEADER QUICKIE SLIM LINE						
AE	V50332	MRC	5/25/95			VERTICAL 4 WALL						
AF	N05-0060	ERE	8/08/05			dwg no 66506						
AG	M06-0282	AGS	7/22/06			sheet 1 of 10 size A3						
AH	M07-0363	MHT	8/17/07	enrg		type Product Customer Drawing						
AJ	N08-0138	R.B	07/08/08	chr								
sheet index		revision sheet	AJ 1	AJ 2	AJ 3	AJ 4	AJ 5	AJ 6	AJ 7	AJ 8	AJ 9	AJ 10

PDM:4 Rev:AJ


STATUS Released

Printed: Apr 12, 2011

PRODUCT NUMBER
SEE TABLE




2 X 5
STYLE A



2 X 7
STYLE C



2 X 5
STYLE B



2 X 8 THRU 2 X 30
STYLE D



STYLE E

NOTES:

- 1) SAME POSITION TOLERANCE APPLIES TO BOTH ENDS OF PINS.
- 2) MOLDING MATERIAL: GLASS-FILLED POLYESTER, FLAME RETARDANT PER UL 94 V-0, COLOR: BLUE.
3. 1° MAX. DRAFT PERMISSIBLE ON ALL SURFACES.
4. 4 LBS./1.8 KG MIN. TERMINAL PULL-OUT FORCE.
- 5) TERMINAL MATERIAL: PHOSPHORUS BRONZE.
- 6) MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - BLACK.
- 7) MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - GREY.
- 8) PART NUMBERS WITH "R" FOLLOWING THE PART NUMBER (EXAMPLE 66506-326 R) HAS RETENTION. (ONLY PARTS WITH .105, .120, AND .150 ROUND OR SQUARE TAILS CAN HAVE RETENTION.) LOCATION IS MANUFACTURERS OPTION.
FOR ROUND PIN CONNECTORS:
15 LBS MAX INSERTION AND .25 LB MIN RETENTION FORCE WHEN USED IN .035±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
FOR SQUARE PIN CONNECTORS:
15 LBS MAX INSERTION AND .5 LB MIN RETENTION FORCE WHEN USED IN .040±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
- 9) PART NUMBERS WITH "T" FOLLOWING PART NUMBER (EXAMPLE 66506-068 T IS PACKED IN TUBES.) (CALL PRODUCT MANAGER FOR AVAILABILITY.)
10. SEE 68751 FOR LATCHES.
- 11) MAY BE ORDERED WITH "G" PACK PACKAGING BY ADDING "G" TO DASH NUMBER.
- 12) ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION & PART NUMBERS WITH "LF" SUFFIX ADDED IN THE TABLE ARE LEAD FREE.
- 13) IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
14. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- 15) *THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS.*
- 16) PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

mat'l. code		surface	tolerance	projection	product family
AJ		ISO 1302	ISO 406 ISO 1101		QUICKIE
lfr		tolerances unless otherwise specified		title	
ecn	no	angles	Linear	INCH/MM	
dr	date	0m2t	.00101/.0013 .00105/.0013 .0010001/.0010061	HEATER QUICKIE SLIM LINE VERTICAL 4 WALL	
enr		scale 1:1		dwg no	
chr		FCI		sheet 2 of 10 size	
appd		M. SMYK 1/25/95		66506	
sheet		revision		type	
index	sheet	M. SMYK 1/25/95		Product Customer Drawing	

PRODUCT NUMBER NOTE 8, 9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING (NOTE 16)	PIN TYPE	PLASTIC MATERIAL
66506-001	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	NOTE 2
-002						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-003						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-004						.105/2.67	120/200u* TIN LEAD	SQ	
-004LF						.105/2.67	100/160u* TIN	SQ	
-005						.150/3.81	120/200u* TIN LEAD	SQ	
-005LF						.150/3.81	100/160u* TIN	SQ	
-006						.675/17.15	120/200u* TIN LEAD	SQ	
-006LF	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.675/17.15	100/160u* TIN	SQ	
-007	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-008						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-009						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-010						.105/2.67	120/200u* TIN LEAD	SQ	
-010LF						.105/2.67	100/160u* TIN	SQ	
-011						.150/3.81	120/200u* TIN LEAD	SQ	
-011LF						.150/3.81	100/160u* TIN	SQ	
-012						.675/17.15	120/200u* TIN LEAD	SQ	
-012LF	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.675/17.15	100/160u* TIN	SQ	
-013	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-014						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-015						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-016						.105/2.67	120/200u* TIN LEAD	SQ	
-016LF						.105/2.67	100/160u* TIN	SQ	
-017						.150/3.81	120/200u* TIN LEAD	SQ	
-017LF						.150/3.81	100/160u* TIN	SQ	
-018						.675/17.15	120/200u* TIN LEAD	SQ	
-018LF	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.675/17.15	100/160u* TIN	SQ	
-019	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-020						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-021						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-022						.105/2.67	120/200u* TIN LEAD	SQ	
-022LF						.105/2.67	100/160u* TIN	SQ	
-023						.150/3.81	120/200u* TIN LEAD	SQ	
-023LF						.150/3.81	100/160u* TIN	SQ	
-024						.675/17.15	120/200u* TIN LEAD	SQ	
66506-024LF	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.675/17.15	100/160u* TIN	SQ	NOTE 2

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101	QUICKIE	QUICKIE
tolerances unless otherwise specified		linear	0.01/0.03	INCH/MM	title
angles		0.05/0.13	scale 1:1	HEADER QUICKIE SLIM LINE	
dr		0.001/0.002/0.004/0.006		VERTICAL 4 WALL	
enr		L. SANDERS 1/25/95		dwg no	sheet 3 of 10 size
chr		J. ROMBERGER 1/25/95		66506	A3
appd		M. SMYK 1/25/95		type	Product Customer Drawing
sheet index	revision sheet				

form: A3

PDM:4Rev:AJ

STATUS Released

Printed: Apr 12, 2011

6

PRODUCT NUMBER NOTE 8, 9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING (NOTE 16)	PIN TYPE	PLASTIC MATERIAL
66506 -025	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	NOTE 2
-026						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-027						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-028						.105/2.67	120/200u" TIN LEAD	SQ	
-028LF						.105/2.67	100/160u" TIN	SQ	
-029						.150/3.81	120/200u" TIN LEAD	SQ	
-029LF						.150/3.81	100/160u" TIN	SQ	
-030						.675/17.15	120/200u" TIN LEAD	SQ	
-030LF	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.675/17.15	100/160u" TIN	SQ	
-031	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-032						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-033						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-034						.105/2.67	120/200u" TIN LEAD	SQ	
-034LF						.105/2.67	100/160u" TIN	SQ	
-035						.150/3.81	120/200u" TIN LEAD	SQ	
-035LF						.150/3.81	100/160u" TIN	SQ	
-036						.675/17.15	120/200u" TIN LEAD	SQ	
-036LF	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.675/17.15	100/160u" TIN	SQ	
-037	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-038						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-039						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-040						.105/2.67	120/200u" TIN LEAD	SQ	
-040LF						.105/2.67	100/160u" TIN	SQ	
-041						.150/3.81	120/200u" TIN LEAD	SQ	
-041LF						.150/3.81	100/160u" TIN	SQ	
-042						.675/17.15	120/200u" TIN LEAD	SQ	
-042LF	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.675/17.15	100/160u" TIN	SQ	
-043	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-044						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-045						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-046						.105/2.67	120/200u" TIN LEAD	SQ	
-046LF						.105/2.67	100/160u" TIN	SQ	
-047						.150/3.81	120/200u" TIN LEAD	SQ	
-047LF						.150/3.81	100/160u" TIN	SQ	
-048						.675/17.15	120/200u" TIN LEAD	SQ	
66506 -048LF	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.675/17.15	100/160u" TIN	SQ	NOTE 2

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family QUICKIE
tr e c n n o d r d a t e	tolerances unless otherwise specified			title
AJ	angles	linea	INCH/MM	HEADER QUICKIE SLIM LINE VERTICAL 4 WALL
	0.0025	XXXX.000/XXXX.001	scale 1:1	dwg no 66506
	dr L. SANDERS 1/25/95	enr M. SMYK 1/25/95		shee# of 10 size A3
	chr J. ROMBERGER 1/25/95	app M. SMYK 1/25/95		type Product Customer Drawing
sheet index	revision sheet			

Copyright FCI

PRODUCT NUMBER NOTE 8,9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING (NOTE 16)	PIN TYPE	PLASTIC MATERIAL
66506 -049	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81	30u"/0.76u GXT OR Au WITH GOLD FLASH	RD	NOTE 2
-050	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86				
-051	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48				
-052	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64				
-053	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26				
-054	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96				
-055	2 X 7	C	.98/24.9	.92/23.4	.600/15.24				
-056	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.150/3.81	30u"/0.76u GXT OR Au WITH GOLD FLASH		
-057	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-058						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-059						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-060						.105/2.67	120/200u" TIN LEAD	SQ	
-060LF						.105/2.67	100/160u" TIN	SQ	
-061						.150/3.81	120/200u" TIN LEAD	SQ	
-061LF						.150/3.81	100/160u" TIN	SQ	
-062						.675/17.15	120/200u" TIN LEAD	SQ	
-062LF						.675/17.15	100/160u" TIN	SQ	
-063						.105/2.67	30u"/0.76u GXT OR Au WITH GOLD FLASH	RD	
-064						.150/3.81		RD	
-065	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.675/17.15			
-066	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67			
-067	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.675/17.15			
-068	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.105/2.67			
-069	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.675/17.15			
-070	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67	30u"/0.76u GXT OR Au WITH GOLD FLASH	RD	
-071	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.675/17.15	30u"/0.76u GXT OR Au WITH GOLD FLASH	SQ	
-072	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.105/2.67			
-073	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.675/17.15			
-074	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.105/2.67			
-075	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.675/17.15			
-076	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67			
-077	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.675/17.15			
-078	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67			
-079	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.675/17.15			
-080	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.105/2.67			
66506 -081	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.675/17.15	30u"/0.76u GXT OR Au WITH GOLD FLASH	SQ	NOTE 2

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection FIRST ANGLE	product family QUICKIE
lfr	ecn no	dr	date	title
AJ				HEADER QUICKIE SLIM LINE VERTICAL 4 WALL
	angles	linear	scale 1:1	dwg no 66506
	dr	L. SANDERS	1/25/95	sheet 5 of 10 size A3
	enr	M. SMYK	1/25/95	type Product Customer Drawing
	chr	J. ROMBERGER	1/25/95	
	appd	M. SMYK	1/25/95	
sheet index	revision sheet			

PRODUCT NUMBER NOTE 8,9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING (NOTE 16)	PIN TYPE	PLASTIC MATERIAL
66506-082	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	15u"/0.38u Au OR GXT OVER 50u/1.27u Ni	RD	NOTE 2
-083	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81		RD	
-084	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.675/17.15		SQ	
-085	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.105/2.67		RD	
-086	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.150/3.81		RD	
-087	2 X 7	C	.98/24.9	.92/23.4	.600/15.24	.675/17.15		SQ	
-088	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67		RD	
-089	2 X 8		1.08/27.4	1.02/25.9	.700/17.78	.150/3.81		RD	
-090	2 X 8		1.08/27.4	1.02/25.9	.700/17.78	.675/17.15		SQ	
-091	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.105/2.67		RD	
-092	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.150/3.81		RD	
-093	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.675/17.15		SQ	
-094	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.105/2.67		RD	
-095	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.150/3.81		RD	
-096	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.675/17.15		SQ	
-097	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67		RD	
-098	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81		RD	
-099	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.675/17.15		SQ	
-100	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67		RD	
-101	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.150/3.81		RD	
-102	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.675/17.15		SQ	
-103	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.105/2.67		RD	
-104	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.150/3.81		RD	
-105	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.675/17.15	15u"/0.38u Au OR GXT OVER 50u/1.27u Ni	SQ	
-106	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.105/2.67	15u"/0.38u Au OR GXT OVER 50u/1.27u Ni	RD	
-107	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.150/3.81	15u"/0.38u Au OR GXT OVER 50u/1.27u Ni	RD	
-108	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.675/17.15	15u"/0.38u Au OR GXT OVER 50u/1.27u Ni	SQ	
-109	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-110						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-111						.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-112						.105/2.67	120/200u" TIN LEAD	SQ	
-112LF						.105/2.67	100/160u" TIN	SQ	
-113						.150/3.81	120/200u" TIN LEAD	SQ	
-113LF						.150/3.81	100/160u" TIN	SQ	
-114						.675/17.15	120/200u" TIN LEAD	SQ	
66506-114LF	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.675/17.15	100/160u" TIN	SQ	NOTE 2

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family QUICKIE
lfr ecn no dr date	tolerances unless otherwise specified		INCH/MM	title HEADER QUICKIE SLIM LINE VERTICAL 4 WALL
AJ	linear	XXX.X/XXX.X XXX.X/XXX.X XXX.X/XXX.X	scale 1:1	dwg no 66506
dr L. SANDERS 1/25/95	enr M. SMYK 1/25/95	chr J. ROMBERGER 1/25/95	appd M. SMYK 1/25/95	sheet 6 of 10 size A3
sheet index	revision sheet			type Product Customer Drawing

form: A3

PDM:4Rev:AJ

STATUS Released

Printed: Apr 12, 2011

6

PRODUCT NUMBER NOTE 8,9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING	PIN TYPE	PLASTIC MATERIAL
66506-115	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.105/2.67	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	NOTE 2
-116						.150/3.81	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	
-117						.675/17.15	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-118						.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-119						.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-120	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	NOTE 2
-121									
THRU									
-216									
DISCONTINUED									
-217	2 X 12	D	1.48/37.6	1.42/36.1	1.100/27.94	.105/2.67	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	NOTE 2
-218							30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-219							30u"/0.76u GXT WITH GOLD FLASH	RD	
-220						.105/2.67	120/200u" TIN LEAD	SQ	
-220LF						.105/2.67	100/160u" TIN	SQ	
-221						.150/3.81	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	
-222							30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-223							30u"/0.76u GXT WITH GOLD FLASH	RD	
-224						.150/3.81	120/200u" TIN LEAD	SQ	
-224LF						.150/3.81	100/160u" TIN	SQ	
-225						.675/17.15	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-226							30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	
-227							30u"/0.76u GXT WITH GOLD FLASH	SQ	
-228							120/200u" TIN LEAD	SQ	
-228	2 X 12		1.48/37.6	1.42/36.1	1.100/27.94	.675/17.15	100/160u" TIN	SQ	
-229	2 X 15		1.78/45.2	1.72/43.7	1.400/35.56	.105/2.67	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	
-230							30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-231							30u"/0.76u GXT WITH GOLD FLASH	RD	
-232						.105/2.67	120/200u" TIN LEAD	SQ	
-232LF						.105/2.67	100/160u" TIN	SQ	
-233	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.150/3.81	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	
-234	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-235						.150/3.81	30u"/0.76u GXT WITH GOLD FLASH	RD	
-236						.150/3.81	120/200u" TIN LEAD	SQ	
-236LF						.150/3.81	100/160u" TIN	SQ	
66506-237	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.675/17.15	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	SQ	NOTE 2

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family QUICKIE
lfr	ecn no	dr	date	title
AJ				HEADER QUICKIE SLIM LINE VERTICAL 4 WALL
	angles	linear	0m2t	scale 1:1
	dr	L. SANDERS	1/25/95	dwg no 66506
	enrg	M. SMYK	1/25/95	sheet 7 of 10 size A3
	chr	J. ROMBERGER	1/25/95	type Product Customer Drawing
	appd	M. SMYK	1/25/95	
sheet index	revision sheet			

PDM:4Rev:AJ STATUS Released Printed: Apr 12, 2011 6

form: A3

1

2

3

D

6

PRODUCT NUMBER NOTE 8,9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING (NOTE 16)	PIN TYPE	PLASTIC MATERIAL
66506-238	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.675/17.15	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	NOTE 2
-239							30u"/0.76u GXT WITH GOLD FLASH	SQ	
-240							120/200u* TIN LEAD	SQ	
-240LF	2 X 15		1.78/45.2	1.72/43.7	1.400/35.56	.675/17.15	100/160u* TIN	SQ	
-241	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34	.105/2.67	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	
-242							30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-243							30u"/0.76u GXT WITH GOLD FLASH	RD	
-244						.105/2.67	120/200u* TIN LEAD	SQ	
-244LF						.105/2.67	100/160u* TIN	SQ	
-245						.150/3.81	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	RD	
-246							30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	RD	
-247							30u"/0.76u GXT WITH GOLD FLASH	RD	
-248						.150/3.81	120/200u* TIN LEAD	SQ	
-248LF						.150/3.81	100/160u* TIN	SQ	
-249						.675/17.15	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni		
-250							30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni		
-251							30u"/0.76u GXT WITH GOLD FLASH		
-252	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34	.675/17.15	120/200u* TIN LEAD		
66506-252LF	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34	.675/17.15	100/160u* TIN		
66506-253	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67	15u"/0.38u Au OR GXT OVER 50u"/1.27u Ni	SQ	NOTE 2
66506-254									
THRU									
66506-279									
66506-280	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.105/2.67	120/200u* TIN LEAD	SQ	NOTE 2
66506-280LF	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.105/2.67	100/160u* TIN	SQ	NOTE 2
66506-281									
THRU									
66506-306									
66506-307	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.097/2.46	30u"/.76u GXT WITH GOLD FLASH	SQ	NOTE 2
-308	2 X 5	B	.78/19.8	.72/18.3	.400/10.16				
-309	2 X 7	C	.98/24.9	.92/23.4	.600/15.24				
-310	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78				
-311	2 X 10		1.28/32.5	1.22/31.0	.900/22.86				
-312	2 X 12		1.48/37.6	1.42/36.1	1.100/27.94				
-66506-313	2 X 13	D	1.58/40.1	1.52/38.6	1.200/30.48	.097/2.46	30u"/.76u GXT WITH GOLD FLASH	SQ	NOTE 2

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family QUICKIE
ltr AJ	ecn no	dr	date	tolerances unless otherwise specified
				linear XXX.X/XXX.X XXX.X/XXX.X XXX.X/XXX.X
				angles 0m2
				dr L. SANDERS 1/25/95
				enr M. SMYK 1/25/95
				chr J. ROMBERGER 1/25/95
				appd M. SMYK 1/25/95
sheet index	revision sheet			

title HEADER QUICKIE SLIM LINE VERTICAL 4 WALL
dwg no 66506
sheet 8 of 10 size A3
type Product Customer Drawing

PRODUCT NUMBER NOTE 8,9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING (NOTE 16)	PIN TYPE	PLASTIC MATERIAL
66506-314	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.097/2.46	30u"/0.76u GXT WITH GOLD FLASH	SQ	NOTE 2
-315	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64				
-316	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26				
-317	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34				
-318	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96				
-319	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66	.097/2.46	30u"/0.76u GXT WITH GOLD FLASH		
-320	2 X 8		1.08/27.4	1.02/25.9	.700/17.78	.105/2.67	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni		
-321	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96		30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni		
-322	2 X 8		1.08/27.4	1.02/25.9	.700/17.78		50u"/1.27u Au OVER 50u"/1.27u Ni		
-323	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67	50u"/1.27u Au OVER 50u"/1.27u Ni		NOTE 2
-324	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 6
-325	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.150/3.81	30u"/0.76u GXT WITH GOLD FLASH		NOTE 2
-326	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 7
-327	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 7
-328	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96	.120/3.05	15u"/.38u GXT WITH GOLD FLASH		NOTE 7
-329	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48	.150/3.81	15u"/.38u Au OR GXT OVER 50u"/1.27u Ni		NOTE 2
-330	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96		15u"/.38u Au OR GXT OVER 50u"/1.27u Ni		
-331	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66		15u"/.38u Au OR GXT OVER 50u"/1.27u Ni		
-332	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64		15u"/.38u Au OR GXT OVER 50u"/1.27u Ni		
-333	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.150/3.81	30u"/0.76u GXT WITH GOLD FLASH	SQ	
-334	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.105/2.67	15u"/.38u GXT WITH GOLD FLASH	RD	NOTE 2
-335	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26	.105/2.67	30u"/0.76u GXT WITH GOLD FLASH	RD	NOTE 6
-336	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34	.105/2.67	30u"/0.76u GXT WITH GOLD FLASH	RD	NOTE 6
-337	2 X 12	D	1.48/37.6	1.42/36.1	1.100/27.94	.150/3.81	15u"/.38u Au OR GXT OVER 50u"/1.27u Ni	SQ	NOTE 2
-338	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81	15u"/.38u Au OR GXT OVER 50u"/1.27u Ni	SQ	NOTE 2
-339	2 X 4	A	.68/17.3	.62/15.8	.300/7.62	.105/2.67	15u"/.38u GXT WITH GOLD FLASH	SQ	NOTE 2
66506-340	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.150/3.81	30u"/0.76u Au OR GXT OVER 50u"/1.27u Ni	SQ	NOTE 2

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family QUICKIE
lfr	ecn no	dr	date	title
AJ				HEADER QUICKIE SLIM LINE VERTICAL 4 WALL
angles	linear	0.01/0.03 0.05/0.13 0.02/0.05/0.06	INCH/MM	scale 1:1
dr	L. SANDERS	1/25/95		dwg no
enr	M. SMYK	1/25/95		66506
chr	J. ROMBERGER	1/25/95		sheet 9 of 10 size
appd	M. SMYK	1/25/95		A3
sheet index	revision sheet			type Product Customer Drawing

PDM:4Rev:AJ STATUS Released Printed: Apr 12, 2011 6

PRODUCT NUMBER NOTE 8, 9 & 12	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING (NOTE 16)	PIN TYPE	PLASTIC MATERIAL
66506-341	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81	30u"/.76u Au OR GXT 50u"/1.27u Ni	SQ	NOTE 2
-342	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.150/3.81	15u"/.38u GXT	SQ	NOTE 2
-343	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81	15u"/.38u GXT	SQ	NOTE 2
-344	U N A S S I G N E D								
-345	2 X 20	D	2.28/57.9	2.22/56.4	1.900/48.26	.120/3.05	15u"/.38u GXT WITH GOLD FLASH	SQ	NOTE 7
-346	U N A S S I G N E D								
-347	U N A S S I G N E D								
-348	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	15u"/.38u GXT WITH GOLD FLASH	SQ	NOTE 2
-349	2 X 7	C	.98/24.9	.92/23.4	.600/15.24				
-350	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78				
-351	2 X 10		1.28/32.5	1.22/31.0	.900/22.86				
-352	2 X 13		1.58/40.1	1.52/38.6	1.200/30.48				
-353	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64				
-354	2 X 20		2.28/57.9	2.22/56.4	1.900/48.26				
-355	2 X 22		2.48/63.0	2.42/61.5	2.100/53.34				
-356	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96				
-357	2 X 30		3.28/83.3	3.22/81.8	2.900/73.66	.105/2.67	15u"/.38u GXT WITH GOLD FLASH		
-358	2 X 10		1.28/32.5	1.22/31.0	.900/22.86	.150/3.81	30u"/.76u GXT /50u"/1.27u Ni		
-359	2 X 17		1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81	30u"/.76u GXT /50u"/1.27u Ni		NOTE 2
-360	2 X 12	D	1.48/37.6	1.42/36.1	1.100/27.94	.295/7.49	15u"/.38u GXT WITH GOLD FLASH		NOTE 7
-361	2 X 5	E	.78/19.8	.72/18.3	.400/10.16	.105/2.67	15u"/.38u GXT WITH GOLD FLASH		
-362	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.105/2.67	30u"/.76u GXT WITH GOLD FLASH		NOTE 2
-363	2 X 8	D	1.08/27.4	1.02/25.9	.700/17.78	.105/2.67			
-364	2 X 10	D	1.28/32.5	1.22/31.0	.900/22.86	.105/2.67			
-365	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.105/2.67			
-366	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.105/2.67			
-367	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81			
-368	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64	.150/3.81			
66506-369	2 X 25	D	2.78/70.6	2.72/69.1	2.400/60.96	.150/3.81	30u"/.76u GXT WITH GOLD FLASH	SQ	NOTE 2

SEE NOTE 11
SEE NOTE 11

mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection 	product family QUICKIE
lfr ecn no dr date	tolerances unless otherwise specified		INCH/MM	title HEADER QUICKIE SLIM LINE VERTICAL 4 WALL
AJ	angles Linear	0.01/0.03 0.05/0.13	scale 1:1	dwg no 66506
	dr L. SANDERS 1/25/95			sheet 10 of 10 size A3
	enr M. SMYK 1/25/95			type Product Customer Drawing
	chr J. ROMBERGER 1/25/95			
	appd M. SMYK 1/25/95			
sheet index	revision sheet			

PDM:4Rev:AJ STATUS Released Printed: Apr 12, 2011 6

Copyright FCJ
FCJconnect.com