



PRODUCT NUMBER
98423-X61-XXXLF



PLATING
S = 0.38µm GOLD/GXT ON CONTACT AREA
3.81µm TIN LEAD ON TAIL
G = 0.76µm GOLD/GXT ON CONTACT AREA
3.81µm TIN LEAD ON TAIL
F = GOLD FASH ON CONTACT AREA
3.81µm TIN LEAD ON TAIL

WHEN REQUIRED, ADD SUFFIX LETTER "LF" INDICATES THE PRODUCT IS RoHS COMPATIBLE, SEE NOTE 6
PACKAGING OPTIONAL LETTER (SEE NOTE 5)
NB OF POSITIONS PER ROW 02 TO 25 POS

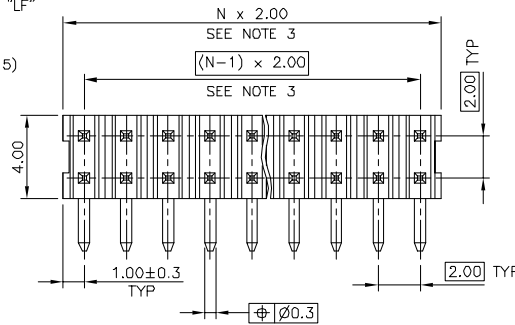

NOTES:

- MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC UL 94V-0, COLOR BLACK
- MATERIAL TERMINAL: COPPER ALLOY
- TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW
- 7N MIN. PIN RETENTION IN EITHER DIRECTION.
- PACKAGING:
= PLASTIC BOX
U = TUBE AVAILABLE FROM 06 TO 50 POS
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - MANUFACTURING PROCESS COMPATIBILITY
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - LABELLING:
- MEETS PACKAGING SPECS AS PER GS-14-920
 - THIS PRODUCT MEETS EUROPEAN DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DISCRIBED IN GS-22-008.

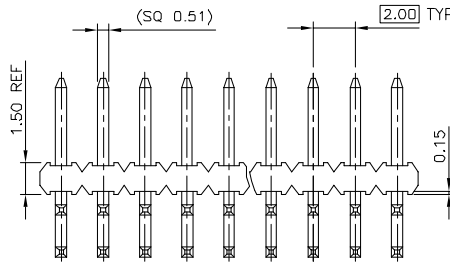

mat'l. code		surface	tolerance	projection	product family
Ltr	ecm no	ISO 1982	ISO 406	ISO 181	MINITEK
A	F10338	LMU	03.10.01	tolerances unless otherwise specified	title
B	F04-0351	JCO	05.01.13	linear	UNSHR HEADER
C	F06-0214	LMU	06.07.05	linear	RIGHT ANGLE TMT
D	F08-0145	ELA	17.04.08	linear	scale 1:1
				engnr	dwg no
				chr	sheet 1 of 1
				appd	size
					A3
					type
					CUSTOMER Drawing

sheet index	revision sheet								