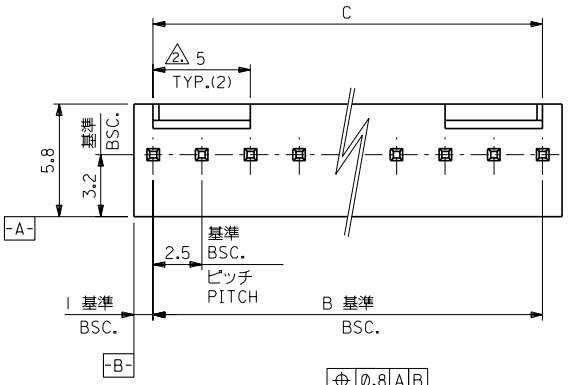


公差非累積
NON-ACCUMULATIVE




基板取付穴推奨寸法
RECOMMENDED P.C.BOARD HOLE DIM.

注)
NOTE.

1. 材料
MATERIAL
ピン　:□0.635×14.2 黄銅、銅下地錫メッキ
PIN: 0.635×14.2 BRASS TIN OVER COPPER PLATING.
ウェハー:ナイロン66,UL94V-0
WAFER:NYLON66,UL94V-0

△2. 6極以上に適用
TO BE APPLIED FOR 6 CKT. AND MORE THEN 6 CKT.

3. 5極以下はロック部スリットなし
NO SLIT IS PROVIDED FOR 5 CKT. AND LESS THAN 5 CKT.

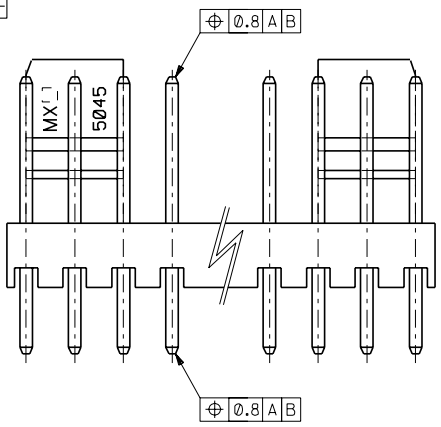


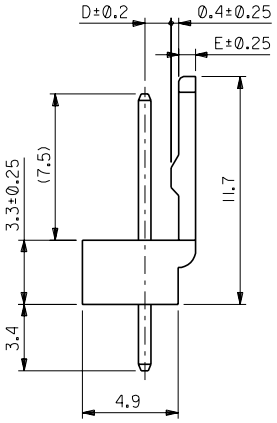


| | | | | | | |
|---|---|---|---|---|---|---|
| 1.35 | 0.85 | 47.5 +0.3 -0.45 | 47.5 | 22-04-1201 | 5045-20A | 20 |
| | | 45 +0.3 -0.45 | 45 | -1191 | -19A | 19 |
| | | 42.5 +0.3 -0.45 | 42.5 | -1181 | -18A | 18 |
| | | 40 +0.3 -0.45 | 40 | -1171 | -17A | 17 |
| | | 37.5 +0.3 -0.45 | 37.5 | -1161 | -16A | 16 |
| | | 35 +0.3 -0.45 | 35 | -1151 | -15A | 15 |
| | | 32.5 +0.25 -0.45 | 32.5 | -1141 | -14A | 14 |
| | | 30 +0.25 -0.4 | 30 | -1131 | -13A | 13 |
| | | 27.5 +0.25 -0.4 | 27.5 | -1121 | -12A | 12 |
| | | 25 +0.2 -0.4 | 25 | -1111 | -11A | 11 |
| | | 22.5 +0.2 -0.4 | 22.5 | -1101 | -10A | 10 |
| | | 20 +0.15 -0.35 | 20 | -1091 | -09A | 9 |
| | | 17.5 +0.15 -0.35 | 17.5 | -1081 | -08A | 8 |
| | | 15 +0.1 -0.3 | 15 | -1071 | -07A | 7 |
| | | 12.5 +0.1 -0.3 | 12.5 | -1061 | -06A | 6 |
| | | 10 +0.15 -0.3 | 10 | -1051 | -05A | 5 |
| 1.35 | 0.85 | 7.5 +0.15 -0.3 | 7.5 | -1041 | -04A | 4 |
| 1.2 | 1 | 5 +0.15 -0.3 | 5 | -1031 | -03A | 3 |
| 1.2 | 1 | 2.5 +0.15 -0.3 | 2.5 | 22-04-1021 | 5045-02A | 2 |
| D | E | C | B | EDP.NO. | ENG.NO. | 極数 CKT. |

DO NOT SCALE DRAWING

| REV | DESCRIPTION | DRAWN | CHK'D | APPR'D |
|---|---|---|---|---|
| B4 | NO. | DRWN: | CHK: | APPR: |
| B3 | NO. | DRWN: | CHK: | APPR: |
| B2 | NO. | DRWN: | CHK: | APPR: |
| B1 | NO. | DRWN: | CHK: | APPR: |
| B0 | NO. JC2000-0629 | DRWN: K.KOHAMA '00/ 3/28 | CHK: T.YAMAGUCHI '00/ 3/30 | APPR: M.FUKUSHIMA '00/ 3/30 |
| | REDRAWN | | | |

MATERIAL 材料: 注記参照 SEE NOTES
FINISH 仕上げ
WIRE RANGE 適用電線範囲
INS. RANGE 被覆外径

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

| | |
|---|---|
| 10 UNDER 未満 | ±0.4 ±0.2 |
| 10 OVER 以上 30 UNDER 未満 | ±0.4 ±0.25 |
| 30 OVER 以上 | ±0.4 ±0.3 |
| ANGLE 角度 | ±3° |

SCALE 5:1 | DESIGN UNITS ☒mm ☐INCH | THIRD ANGLE PROJECTION | DIMENSIONS: ☐mm/INCH ☐INCH/mm ☒mm ONLY | SHT | REV

DRAWN BY & DATE K.KOHAMA '00/ 3/28
CHECKED BY & DATE T.YAMAGUCHI '00/ 3/30
APPROVED BY & DATE M.FUKUSHIMA '00/ 3/30
CAD FILENAME S5045.S01

TITLE: KK 2.5 WAFER ASS'Y WITH LOCK

molex MOLEX INCORPORATED

| MATERIAL NO. | DRAWING NO. | SHEET NO. |
|---|---|---|
| 5045-**A | SD-5045-NA | 1 |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE B

EN-02J(097) MXJ-54

S5045.S01

Downloaded from Elcodis.com electronic components distributor