


13 12 11 10 9 8 7 6 5 4 3 2 1

28	(71.12 / 70.61) 2.800 / 2.780	(68.58 ± 0.25) 2.700 ± .010	4 , 5 24 , 25
27	(68.58 / 68.07) 2.700 / 2.680	(66.04 ± 0.25) 2.600 ± .010	4 , 5 24 , 25
26	(66.04 / 65.53) 2.600 / 2.580	(63.50 ± 0.25) 2.500 ± .010	4 , 5 20 , 21
25	(63.50 / 62.99) 2.500 / 2.480	(60.96 ± 0.25) 2.400 ± .010	4 , 5 20 , 21
24	(60.96 / 60.45) 2.400 / 2.380	(58.42 ± 0.25) 2.300 ± .010	4 , 5 20 , 21
23	(58.42 / 57.96) 2.300 / 2.282	(55.88 ± 0.23) 2.200 ± .009	4 , 5 20 , 21
22	(55.88 / 55.42) 2.200 / 2.182	(53.34 ± 0.23) 2.100 ± .009	4 , 5 16 , 17
21	(53.34 / 52.88) 2.100 / 2.082	(50.80 ± 0.23) 2.000 ± .009	4 , 5 16 , 17
20	(50.80 / 50.34) 2.000 / 1.982	(48.26 ± 0.23) 1.900 ± .009	4 , 5 16 , 17
19	(48.26 / 47.80) 1.900 / 1.882	(45.72 ± 0.23) 1.800 ± .009	4 , 5 16 , 17
18	(45.72 / 45.31) 1.800 / 1.784	(43.18 ± 0.20) 1.700 ± .008	4 , 5 12 , 13
17	(43.18 / 42.77) 1.700 / 1.684	(40.64 ± 0.20) 1.600 ± .008	4 , 5 12 , 13
16	(40.64 / 40.23) 1.600 / 1.584	(38.10 ± 0.20) 1.500 ± .008	4 , 5 12 , 13
15	(38.10 / 37.69) 1.500 / 1.484	(35.56 ± 0.20) 1.400 ± .008	4 , 5 12 , 13
14	(35.56 / 35.20) 1.400 / 1.386	(33.02 ± 0.18) 1.300 ± .007	4 , 5 8 , 9
13	(33.02 / 32.66) 1.300 / 1.286	(30.48 ± 0.18) 1.200 ± .007	4 , 5 8 , 9
12	(30.48 / 30.12) 1.200 / 1.186	(27.94 ± 0.18) 1.100 ± .007	4 , 5 8 , 9
11	(27.94 / 27.58) 1.100 / 1.086	(25.40 ± 0.18) 1.000 ± .007	4 , 5 8 , 9
10	(25.40 / 25.04) 1.000 / .986	(22.86 ± 0.15) .900 ± .006	4 , 5
9	(22.86 / 22.50) .900 / .886	(20.32 ± 0.15) .800 ± .006	4 , 5
8	(20.32 / 19.96) .800 / .786	(17.78 ± 0.15) .700 ± .006	4 , 5
7	(17.78 / 17.42) .700 / .686	(15.24 ± 0.13) .600 ± .005	4 , 5
6	(15.24 / 14.88) .600 / .586	(12.70 ± 0.13) .500 ± .005	4 , 5
5	(12.70 / 12.40) .500 / .488	(10.16 ± 0.13) .400 ± .005	NONE
4	(10.16 / 9.86) .400 / .388	(7.62 ± 0.13) .300 ± .005	NONE
3	(7.62 / 7.32) .300 / .288	(5.08 ± 0.10) .200 ± .004	NONE
2	(5.08 / 4.78) .200 / .188	(2.54 ± 0.05) .100 ± .002	NONE

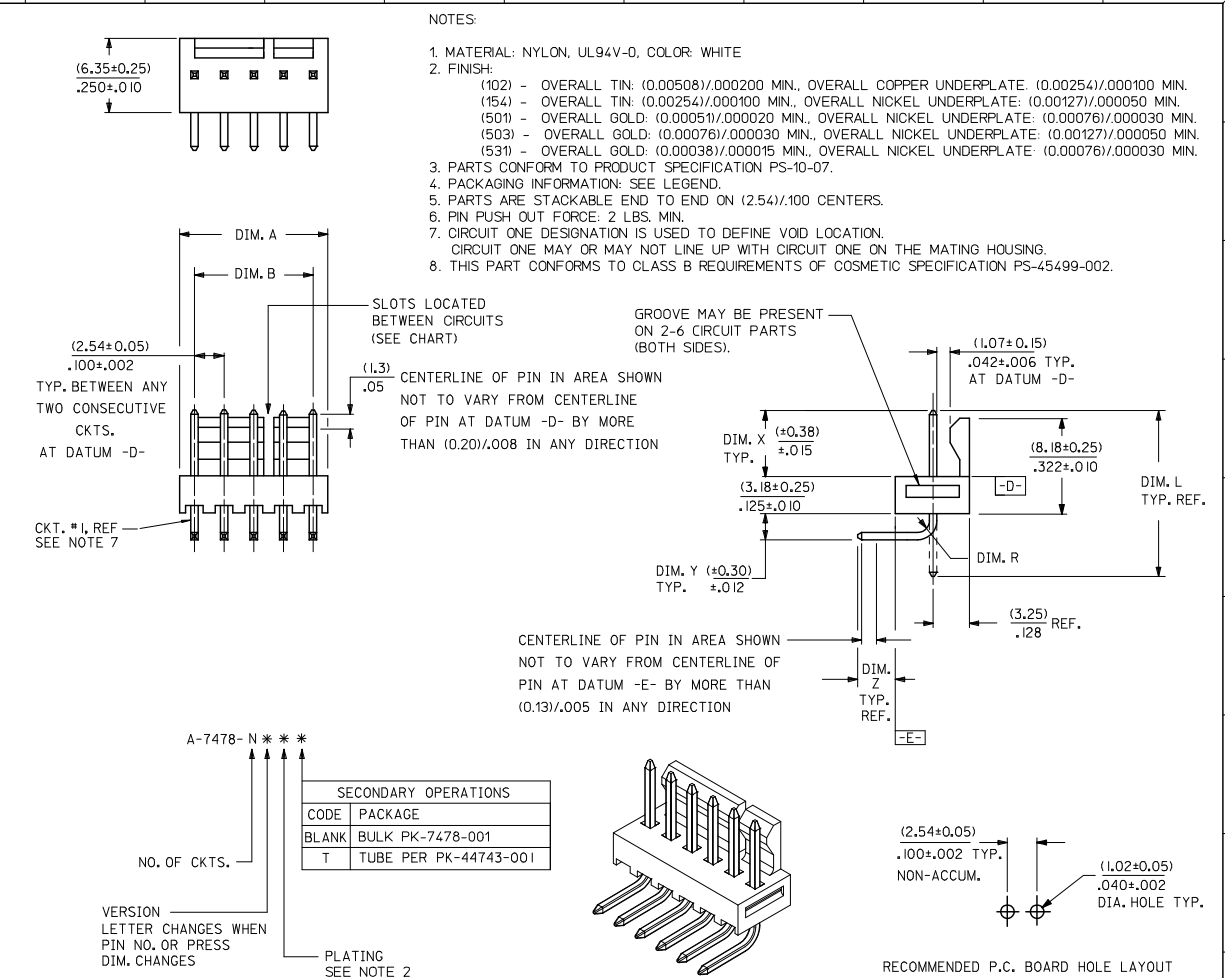

A	NO. OF CKTS.	DIM. A	DIM. B	SLOTS LOC.	REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
								mm	INCH	MM/IN	MM/IN			
								4 PLACES ±.25 ±.010		DRAWN BY GUZ1C	DATE 1987/07/30			TITLE
								3 PLACES ±.010 ±.015		CHECKED BY	DATE 1987/07/30			FRICITION LOCK HEADER ASY
								2 PLACES ±.038 ±.015		PATEL	DATE 1987/07/30			.100 CL BENT SQ PINS
								1 PLACE ±.038 ±.015		APPROVED BY	DATE 1987/07/30			7478 SERIES DWG
								ANGULAR ±1/2°		LENZ	DATE 1987/07/30			MOLEX INCORPORATED
										MATERIAL NO. SDA-7478				MOLEX INCORPORATED
										DOCUMENT NO. SDA-7478				
										SEE CHART				SHEET NO. 1 OF 7

12 11 10 9 8 7 6 5 4 3 2 1

		13	12	11	10	9	8	7	6	5	4	3	2	1												
J	ENG. NO.	PIN NO.	DIM. L	DIM. X	DIM. Z	DIM. Y	DIM. W	DIM. R								ENG. NO.	PIN NO.	DIM. L	DIM. X	DIM. Z	DIM. Y	DIM. W	DIM. T	J		
	A	A-7478-NA I02	2766-4 (I02)	(18.69) .736	(6.60) .260	(3.58) .141	(3.05) .120	90°	(1.17) .046																	
I	A-7478-NA50I	2766-4 (I50 I)	(18.69) .736	(6.60) .260	(3.58) .141	(3.05) .120	90°	(1.17) .046																		
I	A-7478-NA50IT	2766-4 (I50 I)	(18.69) .736	(6.60) .260	(3.58) .141	(3.05) .120	90°	(1.17) .046																		
I	A-7478-NA I02T	2766-4 (I02)	(18.69) .736	(6.60) .260	(3.58) .141	(3.05) .120	90°	(1.17) .046																		
H																										
H																										
G																										
G																										
F																										
F																										
E																										
E																										
D																										
D																										
C																										
C																										
B																										
B																										
A																										
A																										

ADD A-7478-NA I02T  
 SEC NO. UCP2006-1815 2006/02/06  
 Y0 DRWNA50I 2006/02/06  
 UFKOJELHAG 2006/02/06  
 APPRESMITH 2006/02/09

QUALITY SYMBOLS  
 ▽=0  
 ▽=0  
 DESCRIPTION  
 REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±.005	±.0002
3 PLACES	±.008	±.0003
2 PLACES	±.015	±.0006
1 PLACE	±.030	±.0012
ANGULAR	±.005°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE IN/MM

DRAWN BY	DATE
SUZIK	1987/07/10
CHECKED BY	DATE
PATEL	1987/07/10
APPROVED BY	DATE
LENZ	1987/07/10

MATERIAL NO. SEE CHART  
 SIZE C

SCALE --- DESIGN UNITS INCH  
 THIRD ANGLE PROJECTION

TITLE  
 FRICTION LOCK HEADER ASY  
 .100 CL BENT SQ PINS  
 7478 SERIES DWG

MOLEX INCORPORATED

DOCUMENT NO. SDA-7478  
 SHEET NO. 2 OF 7

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

tb\_frame\_C\_P\_ME\_T  
 Rev. D 2004/04/02

	13	12	11	10	9	8	7	6	5	4	3	2	1																			
	A-7478-NA I02		A-7478-NA501		A-7478-NA501T		A-7478-NA I02T																									
J	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.	PART NO.	ENG. NO.																		
	22-05-3021	A-7478-2A I02	22-12-2024	A-7478-2A501	50-29-1710	A-7478-2A501T	50-34-8500	A-7478-2A I02T																								
	22-05-3031	A-7478-3A I02	22-12-2034	A-7478-3A501	50-29-1711	A-7478-3A501T	50-34-8501	A-7478-3A I02T																								
	22-05-3041	A-7478-4A I02	22-12-2044	A-7478-4A501	50-29-1705	A-7478-4A501T	50-34-8502	A-7478-4A I02T																								
I	22-05-3051	A-7478-5A I02	22-12-2054	A-7478-5A501	50-29-1712	A-7478-5A501T																										
	22-05-3061	A-7478-6A I02	22-12-2064	A-7478-6A501	50-29-1713	A-7478-6A501T																										
	22-05-3071	A-7478-7A I02	22-12-2074	A-7478-7A501	50-29-1714	A-7478-7A501T																										
	22-05-3081	A-7478-8A I02	22-12-2084	A-7478-8A501	50-29-1715	A-7478-8A501T																										
H	22-05-3091	A-7478-9A I02	22-12-2094	A-7478-9A501	50-29-1716	A-7478-9A501T																										
	22-05-3101	A-7478-10A I02	22-12-2104	A-7478-10A501	50-29-1717	A-7478-10A501T																										
	22-05-3111	A-7478-11A I02	22-12-2114	A-7478-11A501	50-29-1718	A-7478-11A501T																										
	22-05-3121	A-7478-12A I02	22-12-2124	A-7478-12A501	50-29-1719	A-7478-12A501T																										
	22-05-3131	A-7478-13A I02	22-12-2134	A-7478-13A501	50-29-1720	A-7478-13A501T																										
	22-05-3141	A-7478-14A I02	22-12-2144	A-7478-14A501	50-29-1721	A-7478-14A501T																										
G	22-05-3151	A-7478-15A I02	22-12-2154	A-7478-15A501	50-29-1722	A-7478-15A501T																										
	22-05-3161	A-7478-16A I02	22-12-2164	A-7478-16A501	50-29-1723	A-7478-16A501T																										
	22-05-3171	A-7478-17A I02	22-12-2174	A-7478-17A501	50-29-1724	A-7478-17A501T																										
	22-05-3181	A-7478-18A I02	22-12-2184	A-7478-18A501	50-29-1725	A-7478-18A501T																										
	22-05-3191	A-7478-19A I02	22-12-2194	A-7478-19A501	50-29-1726	A-7478-19A501T																										
F	22-05-3201	A-7478-20A I02	22-12-2204	A-7478-20A501	50-29-1727	A-7478-20A501T																										
	22-05-3211	A-7478-21A I02	22-12-2214	A-7478-21A501	50-29-1728	A-7478-21A501T																										
	22-05-3221	A-7478-22A I02	22-12-2224	A-7478-22A501	50-29-1729	A-7478-22A501T																										
	22-05-3231	A-7478-23A I02	22-12-2234	A-7478-23A501	50-29-1730	A-7478-23A501T																										
	22-05-3241	A-7478-24A I02	22-12-2244	A-7478-24A501	50-29-1731	A-7478-24A501T																										
	22-05-3251	A-7478-25A I02	22-12-2254	A-7478-25A501	50-29-1732	A-7478-25A501T																										
	22-05-3261	A-7478-26A I02	22-12-2264	A-7478-26A501	50-29-1733	A-7478-26A501T																										
E	22-05-3271	A-7478-27A I02	22-12-2274	A-7478-27A501	50-29-1734	A-7478-27A501T																										
	22-05-3281	A-7478-28A I02	22-12-2284	A-7478-28A501	50-29-1735	A-7478-28A501T																										
D																																
C																																
B																																
A																																
	ADD PINS EC NO. UCP2006-1815 2006/02/06 DRW:ADBR 2006/02/06 CHK:BELHAG 2006/02/06 APP:FSMTH 2006/02/09 REV Y9		QUALITY SYMBOLS ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <td></td> <td>mm</td> <td>INCH</td> </tr> <tr> <td>4 PLACES</td> <td>±.005</td> <td>±.0005</td> </tr> <tr> <td>3 PLACES</td> <td>±.008</td> <td>±.0008</td> </tr> <tr> <td>2 PLACES</td> <td>±.012</td> <td>±.0012</td> </tr> <tr> <td>1 PLACE</td> <td>±.015</td> <td>±.0015</td> </tr> <tr> <td>ANGULAR</td> <td>±.005°</td> <td></td> </tr> </table>			mm	INCH	4 PLACES	±.005	±.0005	3 PLACES	±.008	±.0008	2 PLACES	±.012	±.0012	1 PLACE	±.015	±.0015	ANGULAR	±.005°		DIMENSION STYLE IN/MM		SCALE ---		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
	mm	INCH																														
4 PLACES	±.005	±.0005																														
3 PLACES	±.008	±.0008																														
2 PLACES	±.012	±.0012																														
1 PLACE	±.015	±.0015																														
ANGULAR	±.005°																															
DRAWN BY SUZIK DATE 1987/07/10		CHECKED BY PATEL DATE 1987/07/10		APPROVED BY LENZ DATE 1987/07/10		MATERIAL NO. SEE CHART		DOCUMENT NO. SDA-7478		SHEET NO. 3 OF 7																						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				

tb\_frame\_C\_P\_ME\_T  
Rev. D 2004/04/02