



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

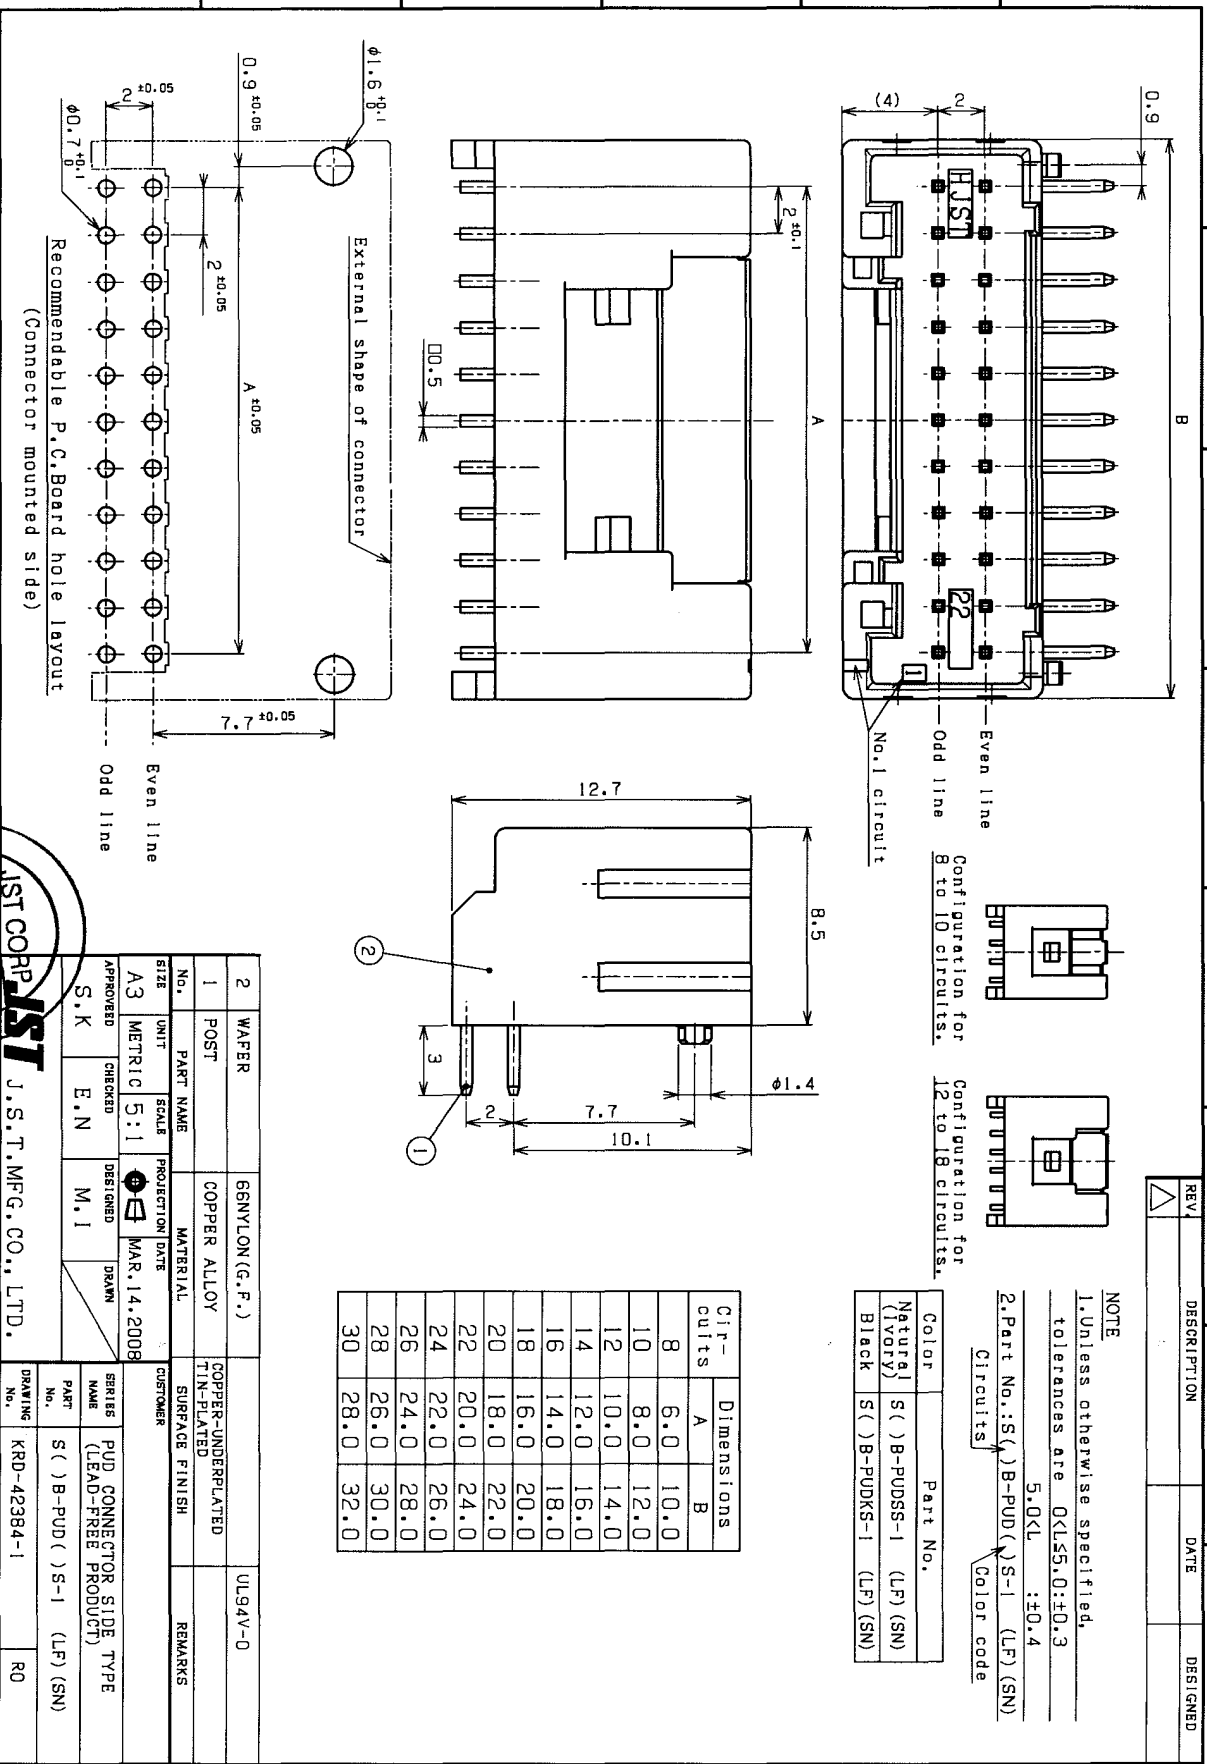


External shape of connector  
 (Connectable P.C.Board hole layout)  
 (Connector mounted side)

0.9 ±0.05  
 2 ±0.05  
 A ±0.05  
 7.7 ±0.05  
 φ1.6 ±0.1  
 φ0.7 ±0.1  
 00.5  
 2 ±0.1  
 Even line  
 Odd line

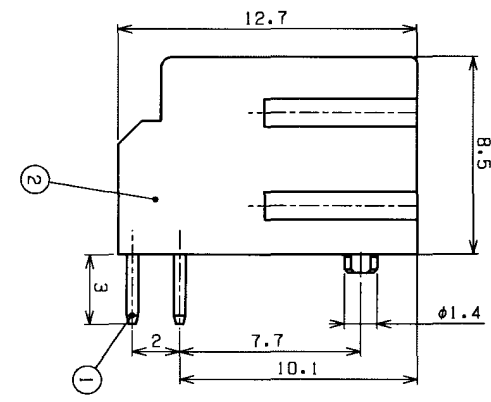


Circuits	Dimensions	
	A	B
8	6.0	10.0
10	8.0	12.0
12	10.0	14.0
14	12.0	16.0
16	14.0	18.0
18	16.0	20.0
20	18.0	22.0
22	20.0	24.0
24	22.0	26.0
26	24.0	28.0
28	26.0	30.0
30	28.0	32.0

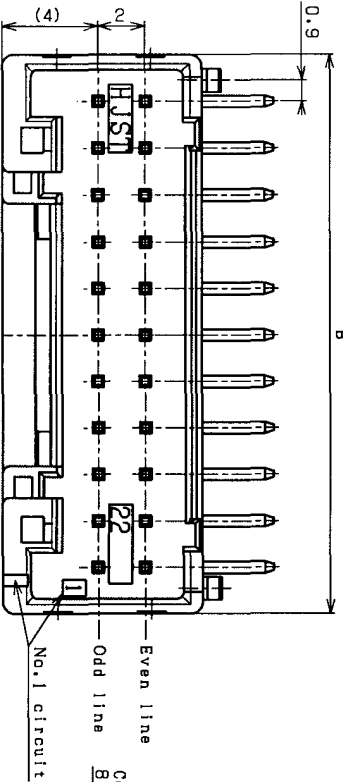

Color	Part No.
Natural (Votry)	S ( ) B-PUDSS-1 (LF) (SN)
Black	S ( ) B-PUDKS-1 (LF) (SN)

NOTE  
 1. Unless otherwise specified, tolerances are 0(L)S, 0.0:±0.3 5.0<L :±0.4  
 2. Part No.: S ( ) B-PUD ( ) S-1 (LF) (SN)  
 Circuits } Color code

2	WAFER	65NYLON(G.F.)	COPPER-UNDERPLATED TIN-PLATED	UL94V-0
1	POST	COPPER ALLOY	COPPER-UNDERPLATED TIN-PLATED	
No. 1		PART NAME	MATERIAL	REMARKS
SIZE UNIT		SCALE	PROJECTION DATE	
A3 METRIC		5:1	⊕	MAR.14.2008
APPROVED		CHECKED	DESIGNED	DRAWN
S.K		E.N	M.1	
CUSTOMER		SERIES NAME (LEAD-FREE PRODUCT)		
DRAWING No.		PART No.		
KRD-42384-1		S ( ) B-PUD ( ) S-1 (LF) (SN)		
RO		DRAWING No. KRD-42384-1		



EC4109-2

REV	DESCRIPTION	DATE	DESIGNED