
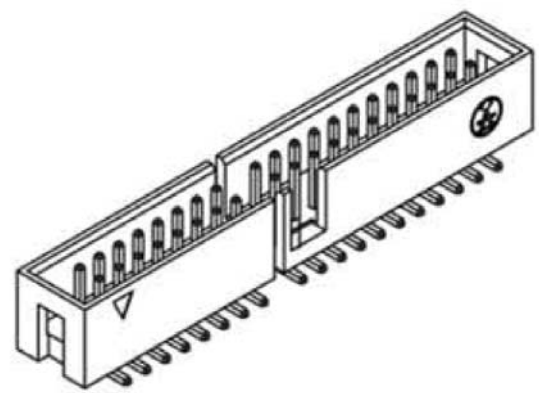


Recommended P.C.B. Layout

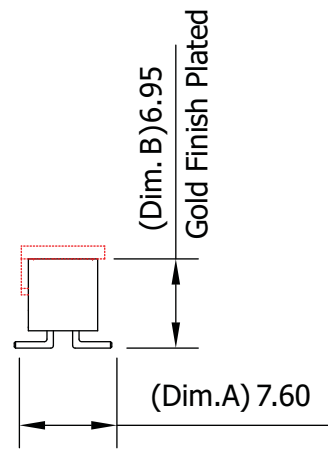

Material:

- Current Rating: 1 Amp
 - Insulator Resistance: 5,000MΩ Min.
 - Dielectric Withstanding: 500V AC
 - Operating Temperature: -40°C ~ +85°C
 - Max Processing Temperature: 230°C for 60 Seconds
 - Max Processing Temperature: 260°C for 10 Seconds
 - Contact Material: Copper Alloy
 - Insulator Material: Polyester, UL 94V-0
- Standard: PA6T

Unit: MM±0.25MM

Ⓜ = Assmann logo



ITEM NO.
AWHW2-20G-SMD-R
TITLE
IDC Box Header, SMD - 2.0MM Pitch, 20 Contacts

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved