
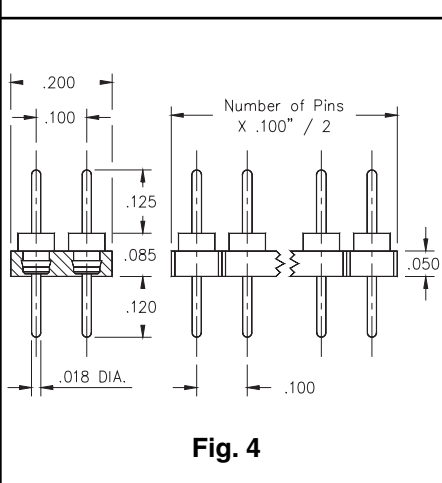
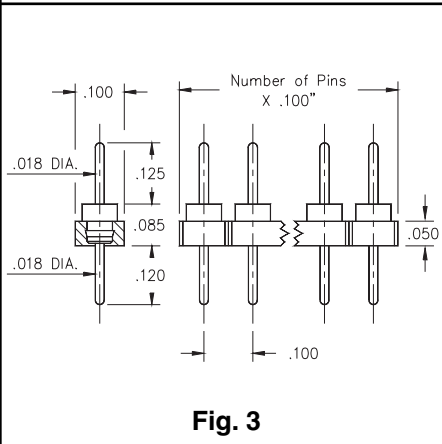
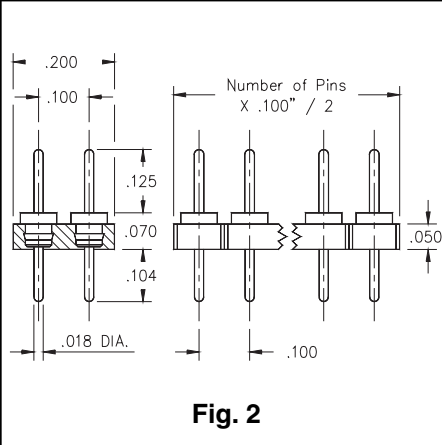


- Series 335 and 435 single and double row PCB interconnects offer the lowest profile available .070".
- Series 364 and 464 single and double row PCB interconnects offer .085" profile above board.
- Series 335 and 435 use MM #3516 pins. See page 179 for details.
- Series 364 and 464 use MM #6458 pins. See page 180 for details.
- Insulators are high temp. thermoplastic.

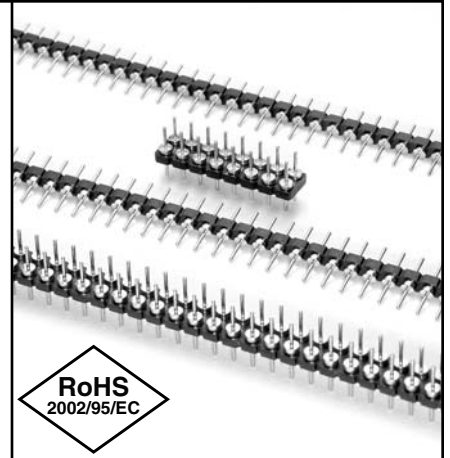

### Ordering Information

<b>Fig. 1</b>	<b>Single Row</b>	<b>.070" Profile Pin Header</b>
	335-XX-1__-00-160000	Specify # of pins → 01-32
<b>Fig. 2</b>	<b>Double Row</b>	<b>.070" Profile Pin Header</b>
	435-XX-2__-00-160000	Specify # of pins → 02-72
<b>Fig. 3</b>	<b>Single Row</b>	<b>.085" Profile Pin Header</b>
	364-10-1__-00-580000	Specify # of pins → 01-32
<b>Fig. 4</b>	<b>Double Row</b>	<b>.085" Profile Pin Header</b>
	464-10-2__-00-580000	Specify # of pins → 02-72

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	